



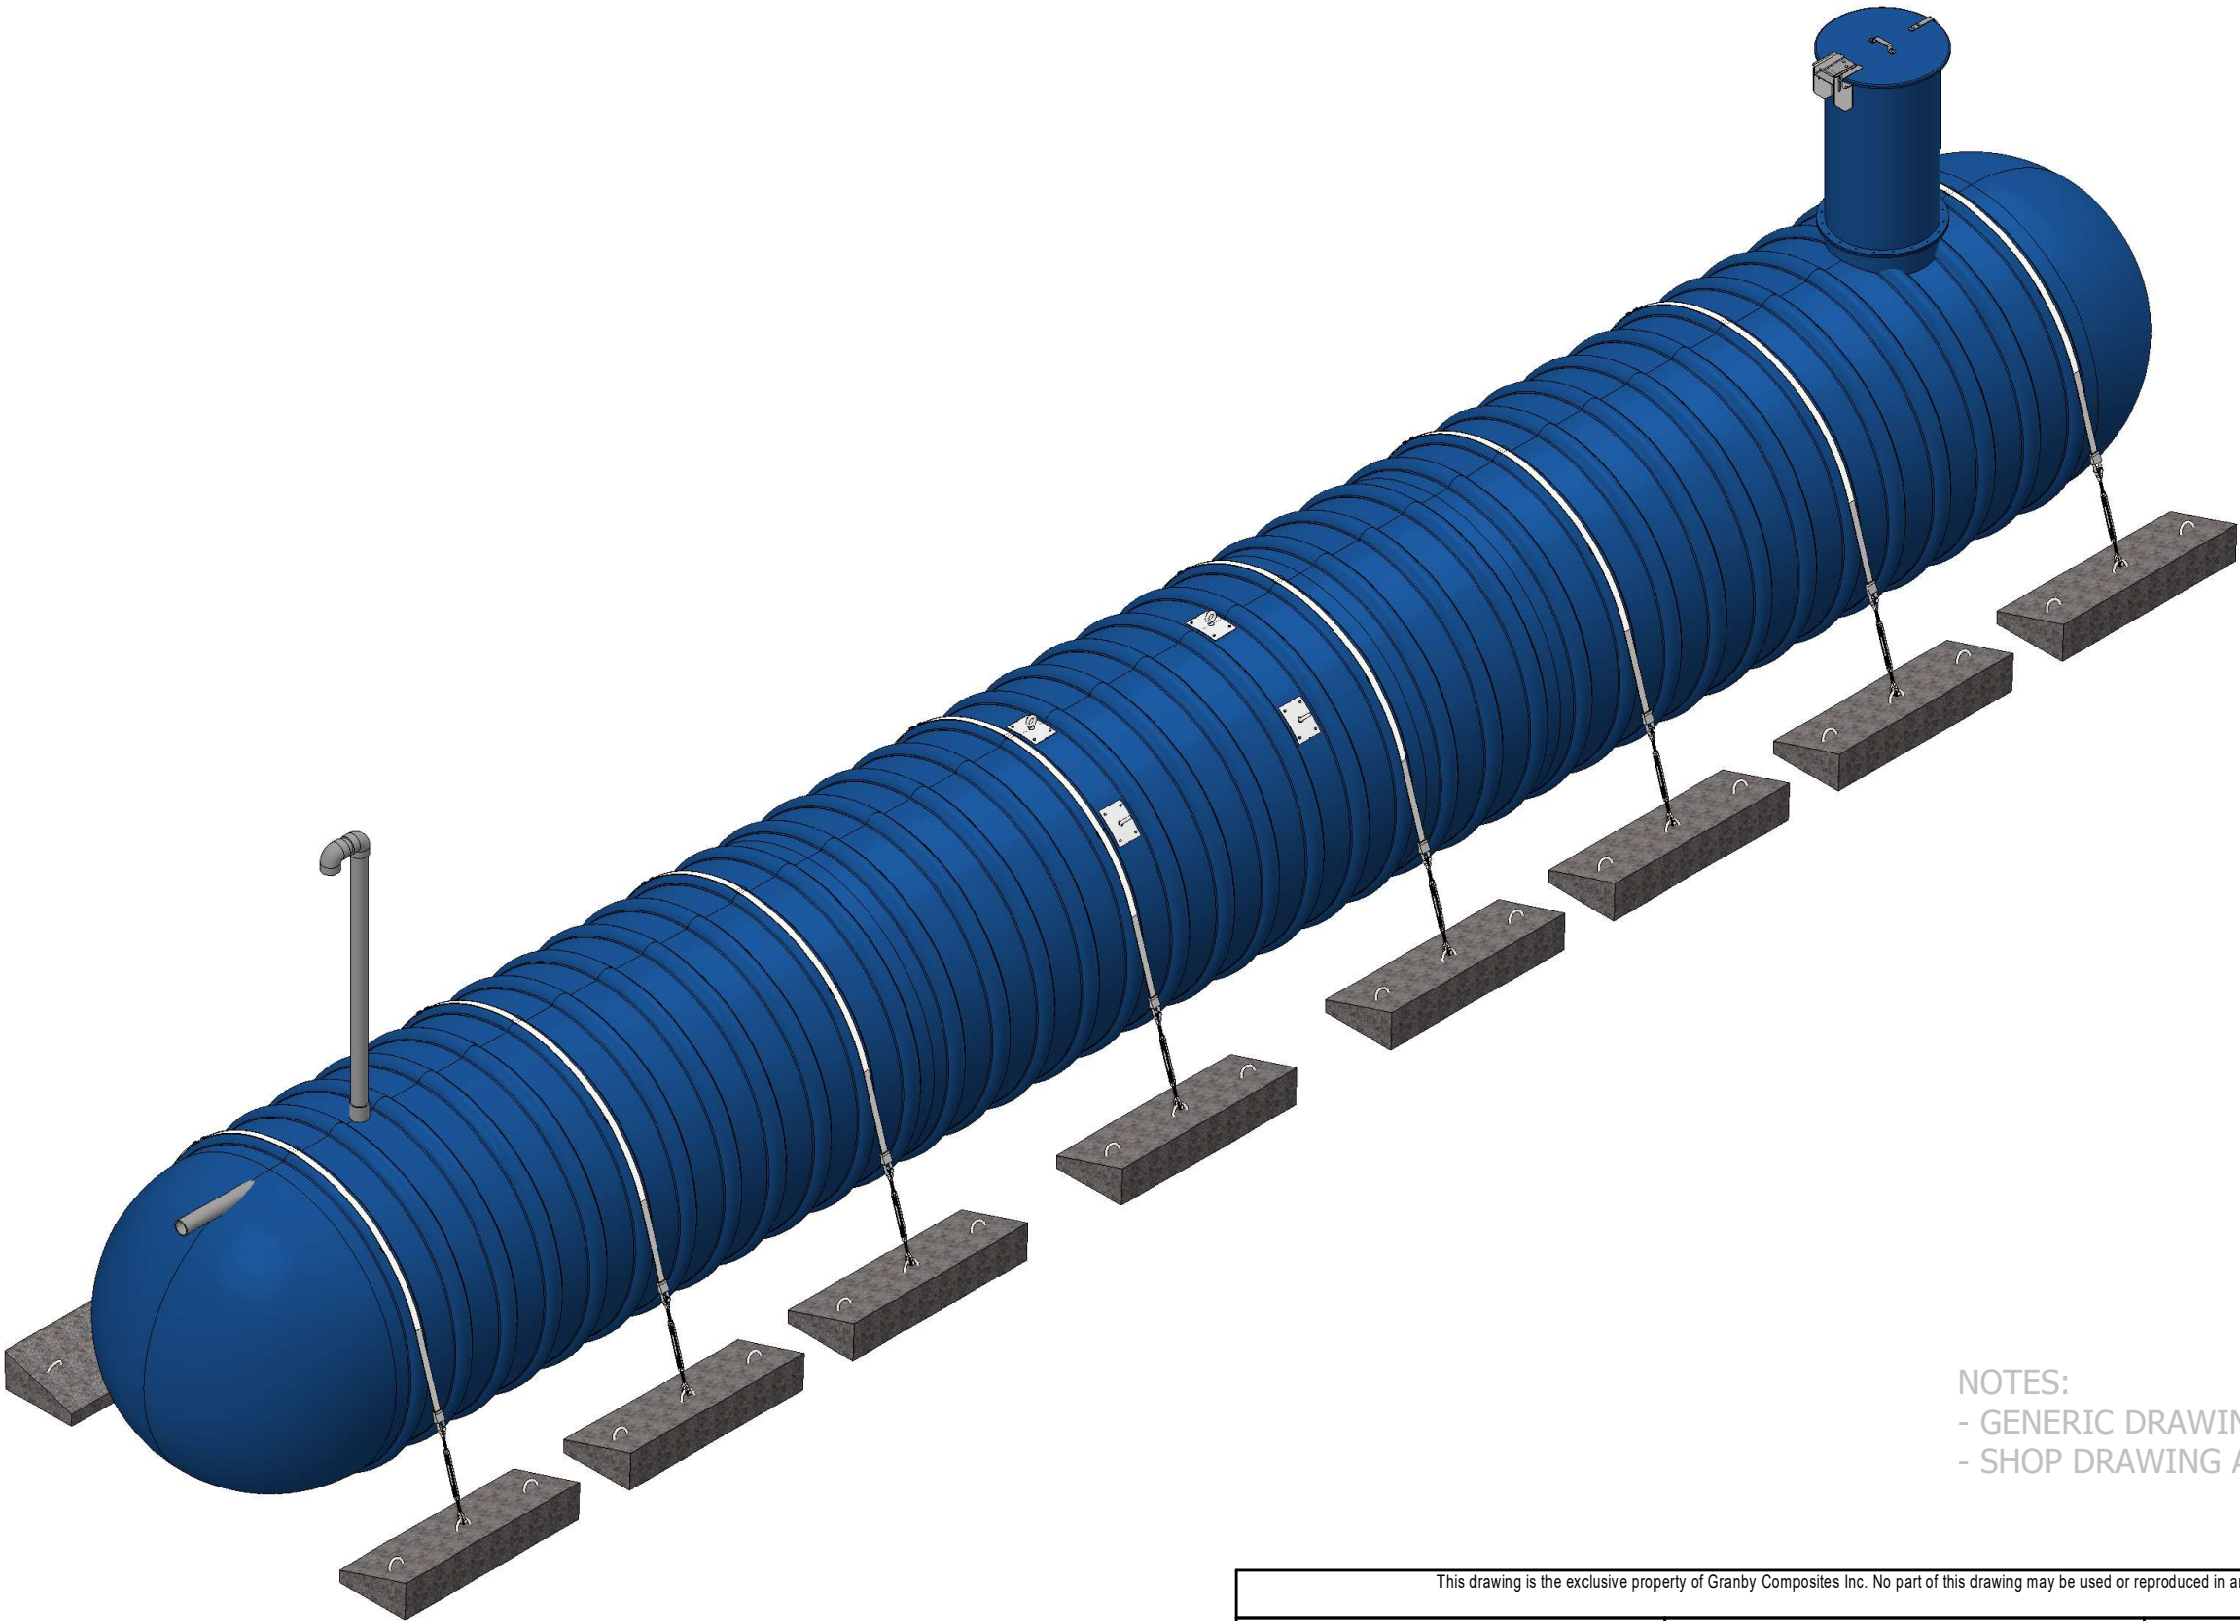

NOTES:
 - GENERIC DRAWING FOR REFERENCE ONLY
 - SHOP DRAWING AVAILABLE ON REQUEST

This drawing is the exclusive property of Granby Composites Inc. No part of this drawing may be used or reproduced in any manner without its written permission.					2019
TOLERANCES (LINEAR)			Revision description		
FEET DIM. -> ± 1%			Format B	Part no. NN08380742EU	REV 02.
0.0 -> ± 0.5"					
0.00 -> ± 0.25"					
0.000 -> ± 0.125"					
TOLERANCES (ANGULAR)		Drawn by O. Marin	20/12/2023		
0 -> ± 2 DEG.					
0.0 -> ± 0.5 DEG.		Approved by :	Title		
0.00 -> ± 0.1 DEG.					
Weight :		8' Dia. TANK - 19922 US gal			
6794 Lb					
Client	# Project	Sheet	1 / 4		

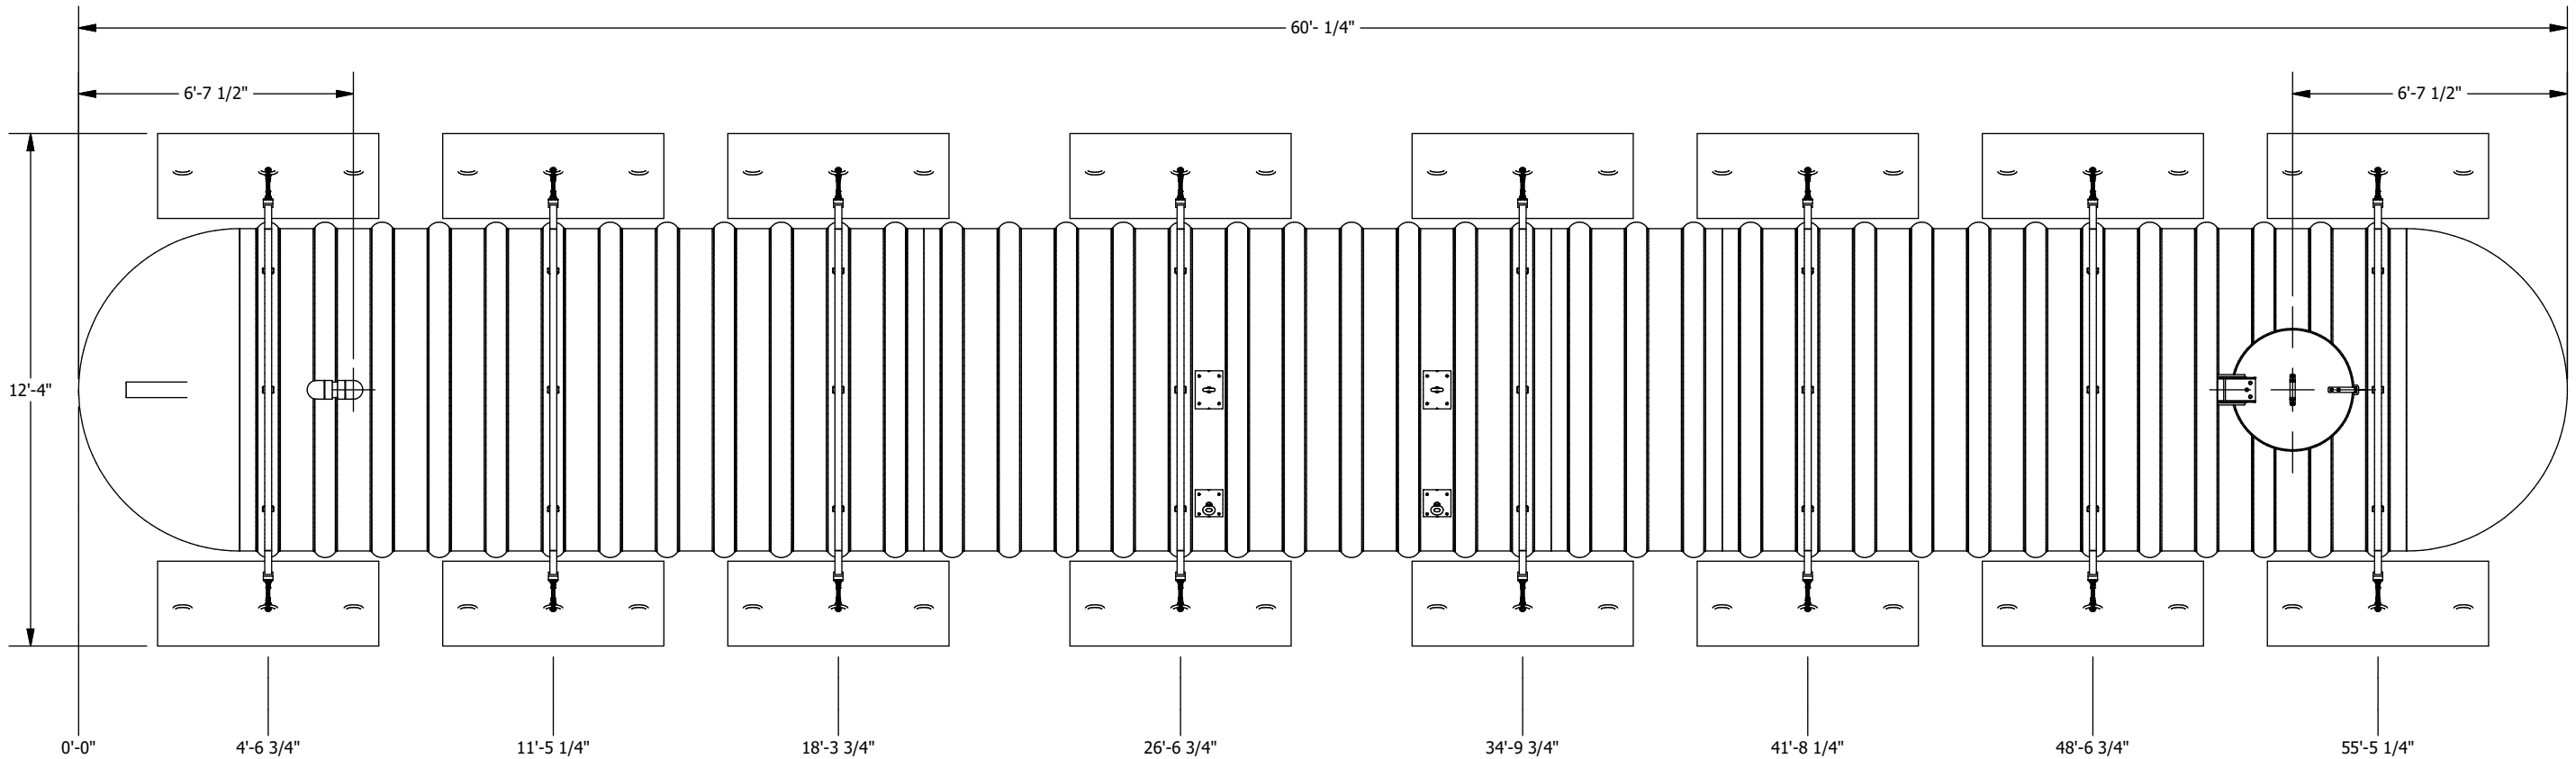

PLAN VIEW

This drawing is the exclusive property of Granby Composites Inc. No part of this drawing may be used or reproduced in any manner without its written permission.										2019
TOLERANCES (LINEAR) FEET DIM. -> ±1% 0.0 -> ±0.5" 0.00 -> ±0.25" 0.000 -> ±0.125"			 GRANBY COMPOSITES			Revision description				
TOLERANCES (ANGULAR) 0 -> ± 2 DEG. 0.0 -> ± 0.5 DEG. 0.00 -> ± 0.1 DEG.						Format B		Part no. NN08380742EU		REV 02.
Weight : 6794 Lb			Drawn by O. Marin			20/12/2023			Title 8' Dia. TANK - 19922 US gal	
Client			Approved by :							
			# Projet			Sheet 3 / 4				



ITEM : ENSCOUR8



Fiberglass Strap Guide
Directly installed on the tank

- Turnbuckle**
- Forged carbon steel, hot-dip galvanized
 - In accordance with US specifications FF-T-791B Type 1, Form 1 (open cage).
 - Safety factor 5:1
 - Working load 5,200 Lbs
- Concrete deadman anchor**
- Weight : 1,093 Lbs
 - Reinforced with galvanized steel
- Fiberglass strap**
- High quality fiberglass
 - Working load 20,000 Lbs
 - Ultimate rated 45,000 Lbs
 - Equipped with galvanized steel rings

This drawing is the exclusive property of Granby Composites Inc. No part of this drawing may be used or reproduced in any manner without its written permission.										2019
TOLERANCES (LINEAR)						Revision description				
FEET DIM. -> ± 1% 0.0 -> ± 0.5"										
0.00 -> ± 0.25" 0.000 -> ± 0.125"						Format	Part no.	REV		
TOLERANCES (ANGULAR)			Drawn by			B	ENSCOUR8	A.		
0 -> ± 2 DEG.			O. Marin			04/10/2018				
0.0 -> ± 0.5 DEG.			Approved by :			Title				
Weight :						ANCHORING KIT				
Client		# Projet			Sheet		4 / 4			



CAPACITY CHART FOR NN08380742 TANK

Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)
66	15319	69	16052	72	16752	75	17413	78	18027	81	18586	84	19080	87	19494	90	19802				
66 1/8	15350	69 1/8	16082	72 1/8	16780	75 1/8	17439	78 1/8	18051	81 1/8	18608	84 1/8	19099	87 1/8	19509	90 1/8	19812				
66 1/4	15381	69 1/4	16112	72 1/4	16809	75 1/4	17466	78 1/4	18076	81 1/4	18630	84 1/4	19118	87 1/4	19524	90 1/4	19822				
66 3/8	15412	69 3/8	16142	72 3/8	16837	75 3/8	17492	78 3/8	18100	81 3/8	18652	84 3/8	19137	87 3/8	19539	90 3/8	19831				
66 1/2	15443	69 1/2	16171	72 1/2	16865	75 1/2	17518	78 1/2	18124	81 1/2	18673	84 1/2	19155	87 1/2	19554	90 1/2	19840				
66 5/8	15474	69 5/8	16201	72 5/8	16893	75 5/8	17545	78 5/8	18148	81 5/8	18695	84 5/8	19174	87 5/8	19568	90 5/8	19848				
66 3/4	15505	69 3/4	16230	72 3/4	16921	75 3/4	17571	78 3/4	18172	81 3/4	18716	84 3/4	19192	87 3/4	19582	90 3/4	19857				
66 7/8	15536	69 7/8	16260	72 7/8	16949	75 7/8	17597	78 7/8	18196	81 7/8	18738	84 7/8	19210	87 7/8	19597	90 7/8	19865				
67	15566	70	16289	73	16977	76	17623	79	18220	82	18759	85	19228	88	19610	91	19872				
67 1/8	15597	70 1/8	16319	73 1/8	17005	76 1/8	17649	79 1/8	18243	82 1/8	18780	85 1/8	19246	88 1/8	19624	91 1/8	19880				
67 1/4	15628	70 1/4	16348	73 1/4	17033	76 1/4	17675	79 1/4	18267	82 1/4	18801	85 1/4	19264	88 1/4	19637	91 1/4	19886				
67 3/8	15659	70 3/8	16377	73 3/8	17060	76 3/8	17700	79 3/8	18291	82 3/8	18822	85 3/8	19281	88 3/8	19651	91 3/8	19893				
67 1/2	15689	70 1/2	16407	73 1/2	17088	76 1/2	17726	79 1/2	18314	82 1/2	18842	85 1/2	19298	88 1/2	19664	91 1/2	19899				
67 5/8	15720	70 5/8	16436	73 5/8	17115	76 5/8	17752	79 5/8	18337	82 5/8	18863	85 5/8	19316	88 5/8	19677	91 5/8	19904				
67 3/4	15750	70 3/4	16465	73 3/4	17143	76 3/4	17777	79 3/4	18360	82 3/4	18883	85 3/4	19333	88 3/4	19689	91 3/4	19909				
67 7/8	15781	70 7/8	16494	73 7/8	17170	76 7/8	17802	79 7/8	18383	82 7/8	18903	85 7/8	19350	88 7/8	19702	91 7/8	19914				
68	15811	71	16523	74	17197	77	17828	80	18406	83	18924	86	19366	89	19714	92	19917				
68 1/8	15841	71 1/8	16552	74 1/8	17224	77 1/8	17853	80 1/8	18429	83 1/8	18944	86 1/8	19383	89 1/8	19726	92 1/8	19920				
68 1/4	15872	71 1/4	16581	74 1/4	17252	77 1/4	17878	80 1/4	18452	83 1/4	18964	86 1/4	19399	89 1/4	19737	92 1/4	19922				
68 3/8	15902	71 3/8	16609	74 3/8	17279	77 3/8	17903	80 3/8	18475	83 3/8	18983	86 3/8	19416	89 3/8	19749	92 3/8	19922				
68 1/2	15932	71 1/2	16638	74 1/2	17306	77 1/2	17928	80 1/2	18497	83 1/2	19003	86 1/2	19432	89 1/2	19760						
68 5/8	15962	71 5/8	16667	74 5/8	17332	77 5/8	17953	80 5/8	18520	83 5/8	19023	86 5/8	19447	89 5/8	19771						
68 3/4	15992	71 3/4	16695	74 3/4	17359	77 3/4	17978	80 3/4	18542	83 3/4	19042	86 3/4	19463	89 3/4	19782						
68 7/8	16022	71 7/8	16724	74 7/8	17386	77 7/8	18002	80 7/8	18564	83 7/8	19061	86 7/8	19479	89 7/8	19792						

** PRECISION IS ABOUT +/- 1%