
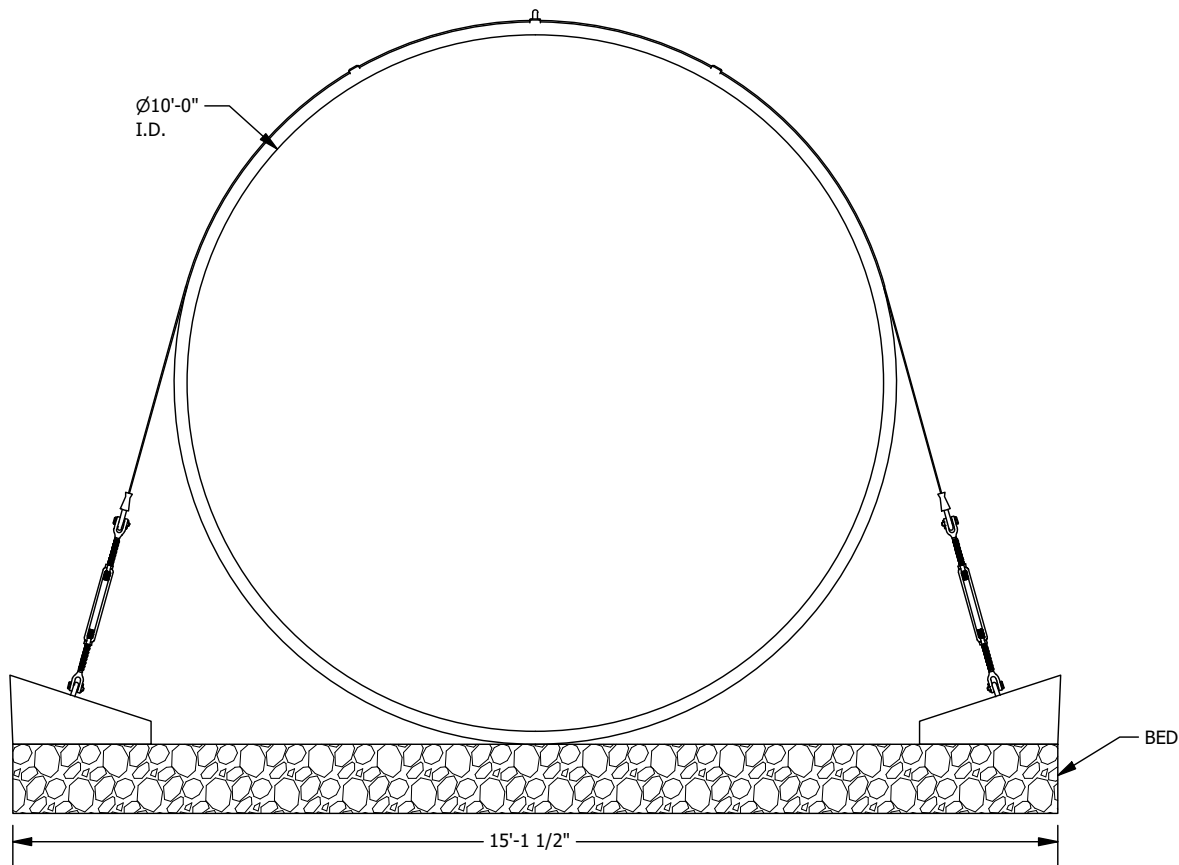


NN10250920
 FIBERGLASS TANK

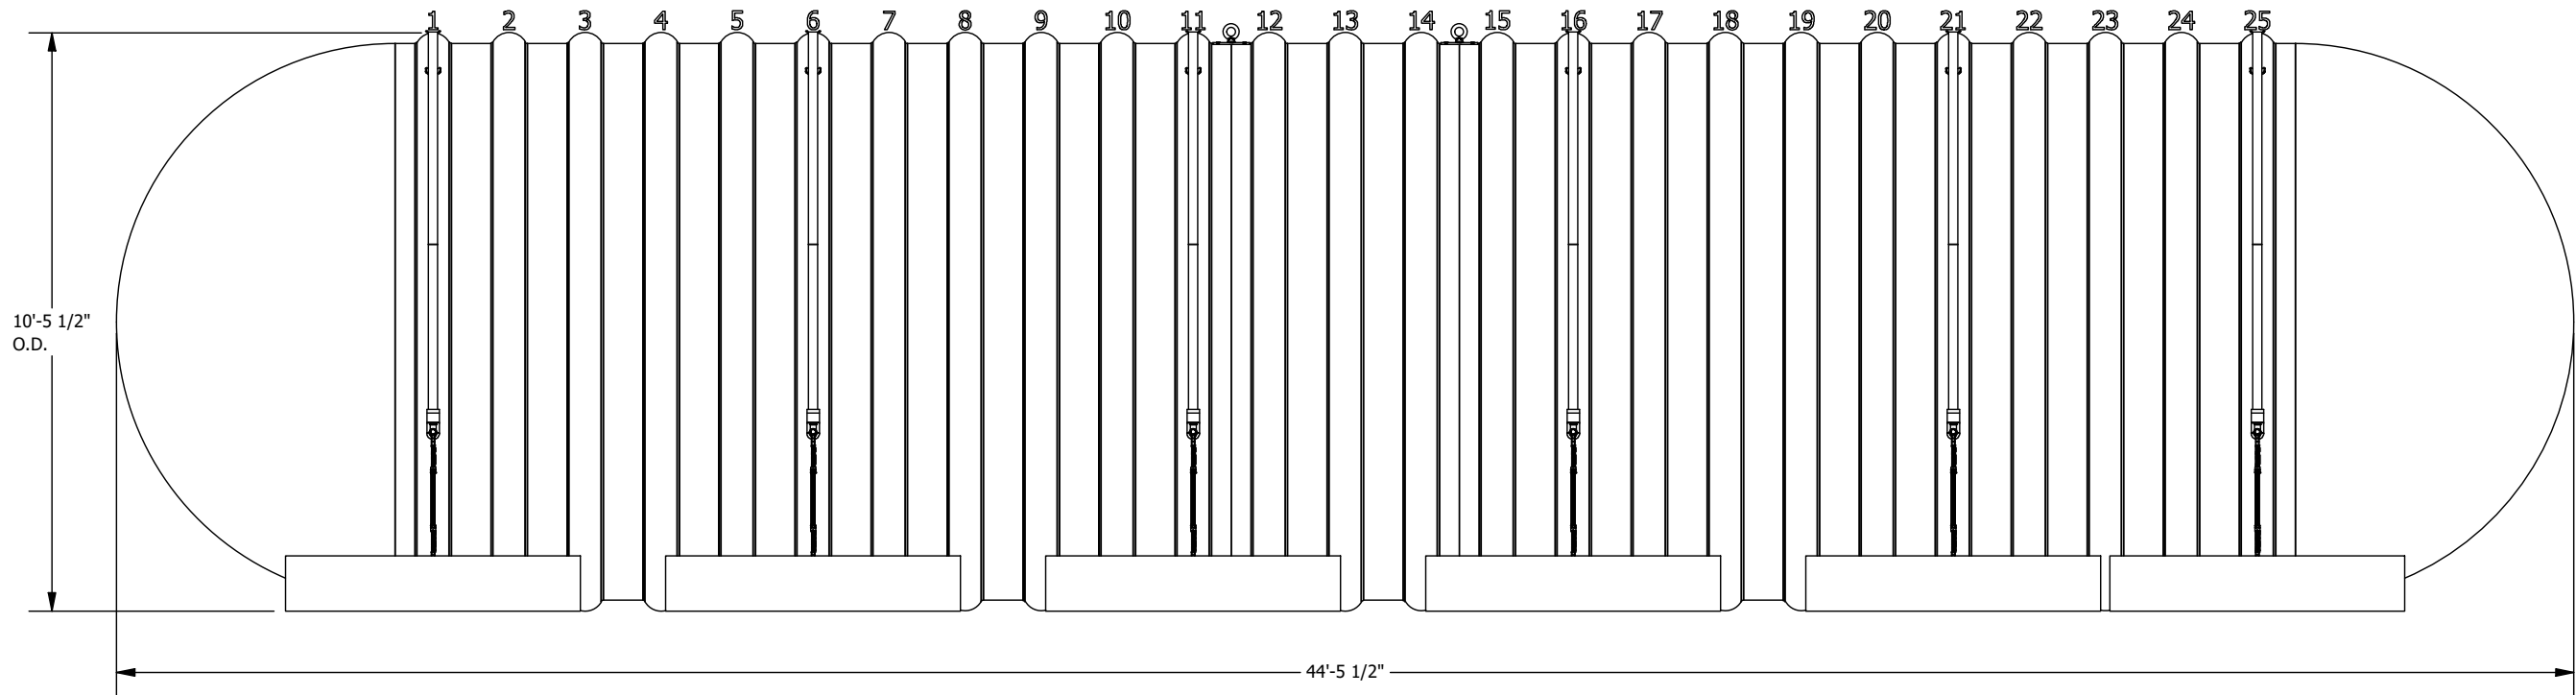


NOTES:
 - GENERIC DRAWING FOR REFERENCE ONLY
 - SHOP DRAWING AVAILABLE ON REQUEST

Optional anchoring depending on the tank's environment


- Technical informations**
 - Burrial depth: 48"
 - Inside Diameter : 120"
 - (If required) Quantity of fiberglass anchoring straps : 6
 - (If required) Quantity of reinforced concrete deadman anchors : 12

The tank must be installed in accordance with the manufacturer's instructions.

This drawing is the exclusive property of Granby Composites Inc. No part of this drawing may be used or reproduced in any manner without its written permission.					2019
TOLERANCES (LINEAR)			Revision description		
FEET DIM. -> ± 1%			Format	Part no.	REV
0.0 -> ± 0.5"					
0.00 -> ± 0.25"		O. Marin	17/07/2024	Title	10' Dia. TANK - 24113 US gal
0.000 -> ± 0.125"					
TOLERANCES (ANGULAR)					
0 -> ± 2 DEG.		Drawn by			
0.0 -> ± 0.5 DEG.					
0.00 -> ± 0.1 DEG.		Approved by :			
Weight :					
6337 Lb					
Client					
# Project		Sheet	1 / 2		

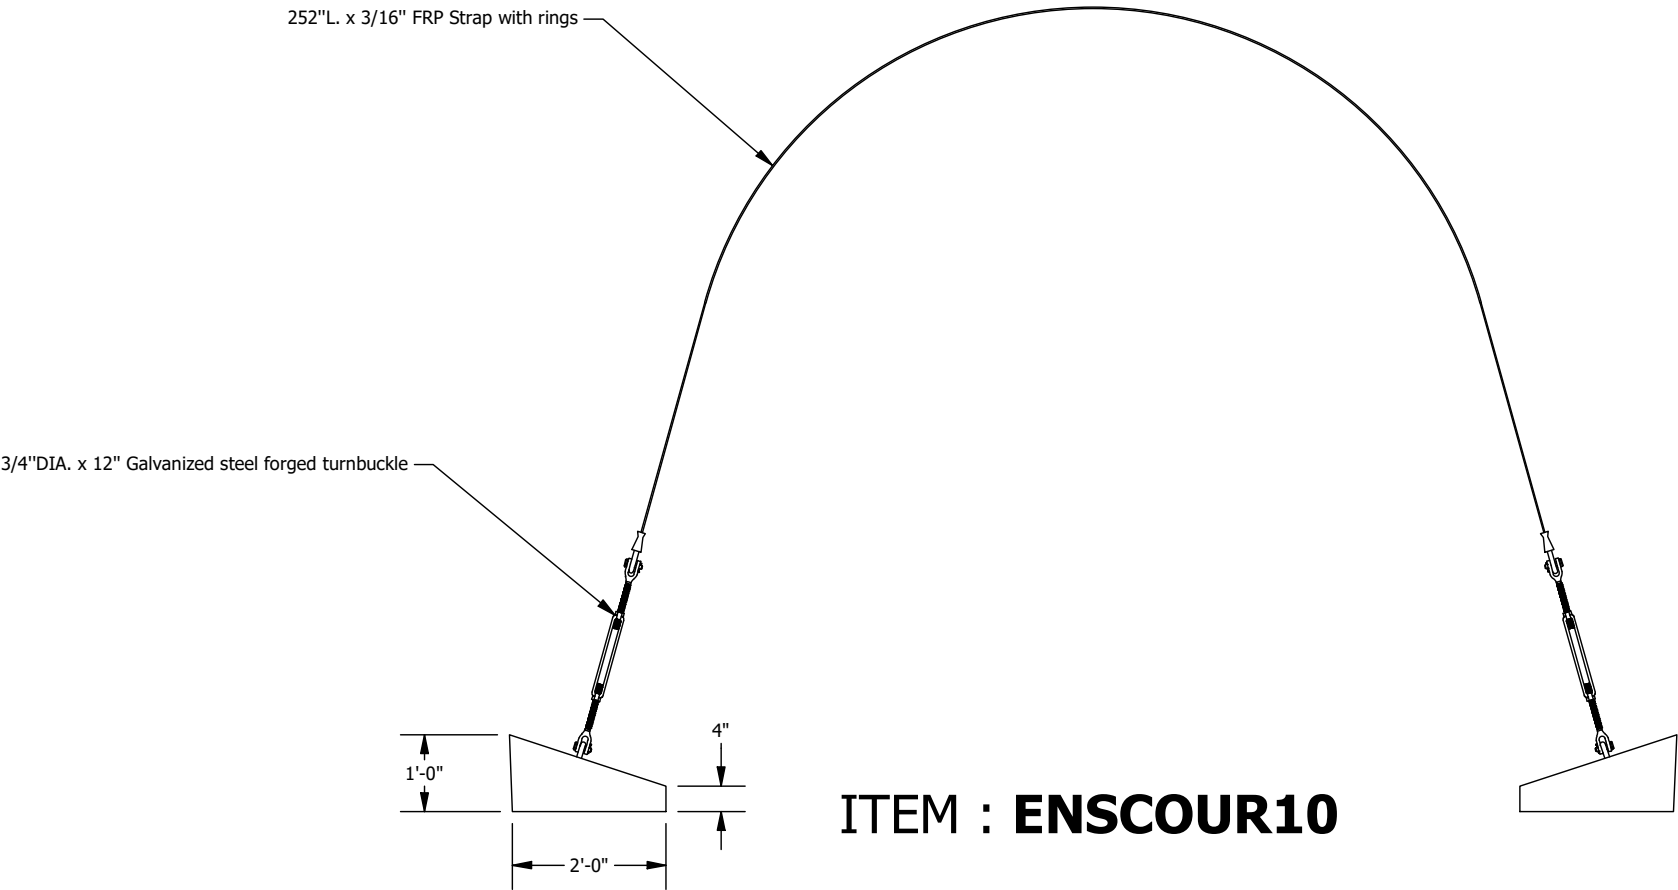

ITEM : ENSCOUR10



Fiberglass Strap Guide
Directly installed on the tank

- Turnbuckle**
- Forged carbon steel, hot-dip galvanized
 - In accordance with US specifications FF-T-791B Type 1, Form 1 (open cage).
 - Safety factor 5:1
 - Working load 5,200 Lbs
- Concrete deadman anchor**
- Weight : 1,093 Lbs
 - Reinforced with galvanized steel
- Fiberglass strap**
- High quality fiberglass
 - Working load 20,000 Lbs
 - Ultimate rated 45,000 Lbs
 - Equipped with galvanized steel rings

This drawing is the exclusive property of Granby Composites Inc. No part of this drawing may be used or reproduced in any manner without its written permission.										2019			
TOLERANCES (LINEAR)								Revision description					
FEET DIM. -> ± 1% 0.0 -> ± 0.5"								0.00 -> ± 0.25" 0.000 -> ± 0.125"					
TOLERANCES (ANGULAR)								0 -> ± 2 DEG. 0.0 -> ± 0.5 DEG.		0.00 -> ± 0.1 DEG.			
Weight :				Drawn by O. Marin		04/10/2018		Format B		Part no. ENSCOUR10		REV A.	
				Approved by :				Title					
Client				# Project				Sheet 2 / 2		ANCHORING KIT			



CAPACITY CHART FOR NN10250920 TANK

Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)
66	13633	71	14933	76	16209	81	17449	86	18642	91	19774	96	20830	101	21795	106	22648	111	23362	116	23894
66 1/8	13666	71 1/8	14966	76 1/8	16241	81 1/8	17480	86 1/8	18671	91 1/8	19801	96 1/8	20856	101 1/8	21818	106 1/8	22668	111 1/8	23378	116 1/8	23904
66 1/4	13699	71 1/4	14998	76 1/4	16272	81 1/4	17510	86 1/4	18700	91 1/4	19828	96 1/4	20881	101 1/4	21841	106 1/4	22688	111 1/4	23394	116 1/4	23914
66 3/8	13731	71 3/8	15030	76 3/8	16304	81 3/8	17541	86 3/8	18729	91 3/8	19856	96 3/8	20906	101 3/8	21864	106 3/8	22707	111 3/8	23409	116 3/8	23924
66 1/2	13764	71 1/2	15062	76 1/2	16335	81 1/2	17571	86 1/2	18758	91 1/2	19883	96 1/2	20931	101 1/2	21886	106 1/2	22727	111 1/2	23425	116 1/2	23934
66 5/8	13797	71 5/8	15094	76 5/8	16366	81 5/8	17601	86 5/8	18787	91 5/8	19910	96 5/8	20956	101 5/8	21909	106 5/8	22746	111 5/8	23440	116 5/8	23944
66 3/4	13829	71 3/4	15126	76 3/4	16398	81 3/4	17632	86 3/4	18816	91 3/4	19937	96 3/4	20981	101 3/4	21931	106 3/4	22765	111 3/4	23455	116 3/4	23953
66 7/8	13862	71 7/8	15159	76 7/8	16429	81 7/8	17662	86 7/8	18845	91 7/8	19965	96 7/8	21006	101 7/8	21953	106 7/8	22784	111 7/8	23470	116 7/8	23962
67	13895	72	15191	77	16460	82	17692	87	18874	92	19992	97	21031	102	21976	107	22803	112	23485	117	23972
67 1/8	13927	72 1/8	15223	77 1/8	16492	82 1/8	17722	87 1/8	18902	92 1/8	20019	97 1/8	21056	102 1/8	21998	107 1/8	22822	112 1/8	23500	117 1/8	23980
67 1/4	13960	72 1/4	15255	77 1/4	16523	82 1/4	17753	87 1/4	18931	92 1/4	20046	97 1/4	21081	102 1/4	22020	107 1/4	22841	112 1/4	23515	117 1/4	23989
67 3/8	13993	72 3/8	15287	77 3/8	16554	82 3/8	17783	87 3/8	18960	92 3/8	20072	97 3/8	21106	102 3/8	22042	107 3/8	22860	112 3/8	23529	117 3/8	23998
67 1/2	14025	72 1/2	15319	77 1/2	16586	82 1/2	17813	87 1/2	18988	92 1/2	20099	97 1/2	21130	102 1/2	22064	107 1/2	22879	112 1/2	23544	117 1/2	24006
67 5/8	14058	72 5/8	15351	77 5/8	16617	82 5/8	17843	87 5/8	19017	92 5/8	20126	97 5/8	21155	102 5/8	22086	107 5/8	22897	112 5/8	23558	117 5/8	24014
67 3/4	14090	72 3/4	15383	77 3/4	16648	82 3/4	17873	87 3/4	19046	92 3/4	20153	97 3/4	21180	102 3/4	22108	107 3/4	22916	112 3/4	23572	117 3/4	24022
67 7/8	14123	72 7/8	15415	77 7/8	16679	82 7/8	17903	87 7/8	19074	92 7/8	20180	97 7/8	21204	102 7/8	22130	107 7/8	22934	112 7/8	23586	117 7/8	24029
68	14155	73	15447	78	16710	83	17933	88	19103	93	20206	98	21228	103	22151	108	22952	113	23600	118	24037
68 1/8	14188	73 1/8	15479	78 1/8	16741	83 1/8	17963	88 1/8	19131	93 1/8	20233	98 1/8	21253	103 1/8	22173	108 1/8	22971	113 1/8	23614	118 1/8	24044
68 1/4	14221	73 1/4	15511	78 1/4	16772	83 1/4	17993	88 1/4	19160	93 1/4	20259	98 1/4	21277	103 1/4	22194	108 1/4	22989	113 1/4	23628	118 1/4	24051
68 3/8	14253	73 3/8	15543	78 3/8	16803	83 3/8	18023	88 3/8	19188	93 3/8	20286	98 3/8	21301	103 3/8	22216	108 3/8	23007	113 3/8	23641	118 3/8	24057
68 1/2	14286	73 1/2	15575	78 1/2	16834	83 1/2	18052	88 1/2	19216	93 1/2	20312	98 1/2	21326	103 1/2	22237	108 1/2	23025	113 1/2	23655	118 1/2	24064
68 5/8	14318	73 5/8	15607	78 5/8	16865	83 5/8	18082	88 5/8	19245	93 5/8	20339	98 5/8	21350	103 5/8	22259	108 5/8	23043	113 5/8	23668	118 5/8	24070
68 3/4	14351	73 3/4	15639	78 3/4	16896	83 3/4	18112	88 3/4	19273	93 3/4	20365	98 3/4	21374	103 3/4	22280	108 3/4	23060	113 3/4	23681	118 3/4	24076
68 7/8	14383	73 7/8	15671	78 7/8	16927	83 7/8	18142	88 7/8	19301	93 7/8	20392	98 7/8	21398	103 7/8	22301	108 7/8	23078	113 7/8	23694	118 7/8	24081
69	14416	74	15702	79	16958	84	18171	89	19329	94	20418	99	21422	104	22322	109	23096	114	23707	119	24086
69 1/8	14448	74 1/8	15734	79 1/8	16989	84 1/8	18201	89 1/8	19357	94 1/8	20444	99 1/8	21445	104 1/8	22343	109 1/8	23113	114 1/8	23720	119 1/8	24091
69 1/4	14480	74 1/4	15766	79 1/4	17020	84 1/4	18231	89 1/4	19385	94 1/4	20470	99 1/4	21469	104 1/4	22364	109 1/4	23130	114 1/4	23733	119 1/4	24096
69 3/8	14513	74 3/8	15798	79 3/8	17051	84 3/8	18260	89 3/8	19413	94 3/8	20496	99 3/8	21493	104 3/8	22385	109 3/8	23148	114 3/8	23745	119 3/8	24100
69 1/2	14545	74 1/2	15830	79 1/2	17082	84 1/2	18290	89 1/2	19441	94 1/2	20522	99 1/2	21517	104 1/2	22406	109 1/2	23165	114 1/2	23758	119 1/2	24104
69 5/8	14578	74 5/8	15861	79 5/8	17113	84 5/8	18319	89 5/8	19469	94 5/8	20548	99 5/8	21540	104 5/8	22426	109 5/8	23182	114 5/8	23770	119 5/8	24107
69 3/4	14610	74 3/4	15893	79 3/4	17143	84 3/4	18349	89 3/4	19497	94 3/4	20574	99 3/4	21564	104 3/4	22447	109 3/4	23199	114 3/4	23782	119 3/4	24110
69 7/8	14642	74 7/8	15925	79 7/8	17174	84 7/8	18378	89 7/8	19525	94 7/8	20600	99 7/8	21587	104 7/8	22467	109 7/8	23216	114 7/8	23794	119 7/8	24112
70	14675	75	15956	80	17205	85	18408	90	19553	95	20626	100	21611	105	22488	110	23232	115	23805		
70 1/8	14707	75 1/8	15988	80 1/8	17235	85 1/8	18437	90 1/8	19581	95 1/8	20652	100 1/8	21634	105 1/8	22508	110 1/8	23249	115 1/8	23817		
70 1/4	14740	75 1/4	16020	80 1/4	17266	85 1/4	18467	90 1/4	19608	95 1/4	20677	100 1/4	21657	105 1/4	22528	110 1/4	23265	115 1/4	23829		
70 3/8	14772	75 3/8	16051	80 3/8	17297	85 3/8	18496	90 3/8	19636	95 3/8	20703	100 3/8	21680	105 3/8	22549	110 3/8	23282	115 3/8	23840		
70 1/2	14804	75 1/2	16083	80 1/2	17327	85 1/2	18525	90 1/2	19664	95 1/2	20729	100 1/2	21704	105 1/2	22569	110 1/2	23298	115 1/2	23851		
70 5/8	14836	75 5/8	16115	80 5/8	17358	85 5/8	18554	90 5/8	19691	95 5/8	20754	100 5/8	21727	105 5/8	22589	110 5/8	23314	115 5/8	23862		
70 3/4	14869	75 3/4	16146	80 3/4	17388	85 3/4	18584	90 3/4	19719	95 3/4	20780	100 3/4	21750	105 3/4	22609	110 3/4	23330	115 3/4	23873		
70 7/8	14901	75 7/8	16178	80 7/8	17419	85 7/8	18613	90 7/8	19746	95 7/8	20805	100 7/8	21773	105 7/8	22629	110 7/8	23346	115 7/8	23883		

** PRECISION IS ABOUT +/- 1%