


NN10250920FS

FIBERGLASS TANK
 TOTAL CAPACITY : 24113 US gal
 NOMINAL CAPACITY (EFFECTIVE) : 21692 US gal


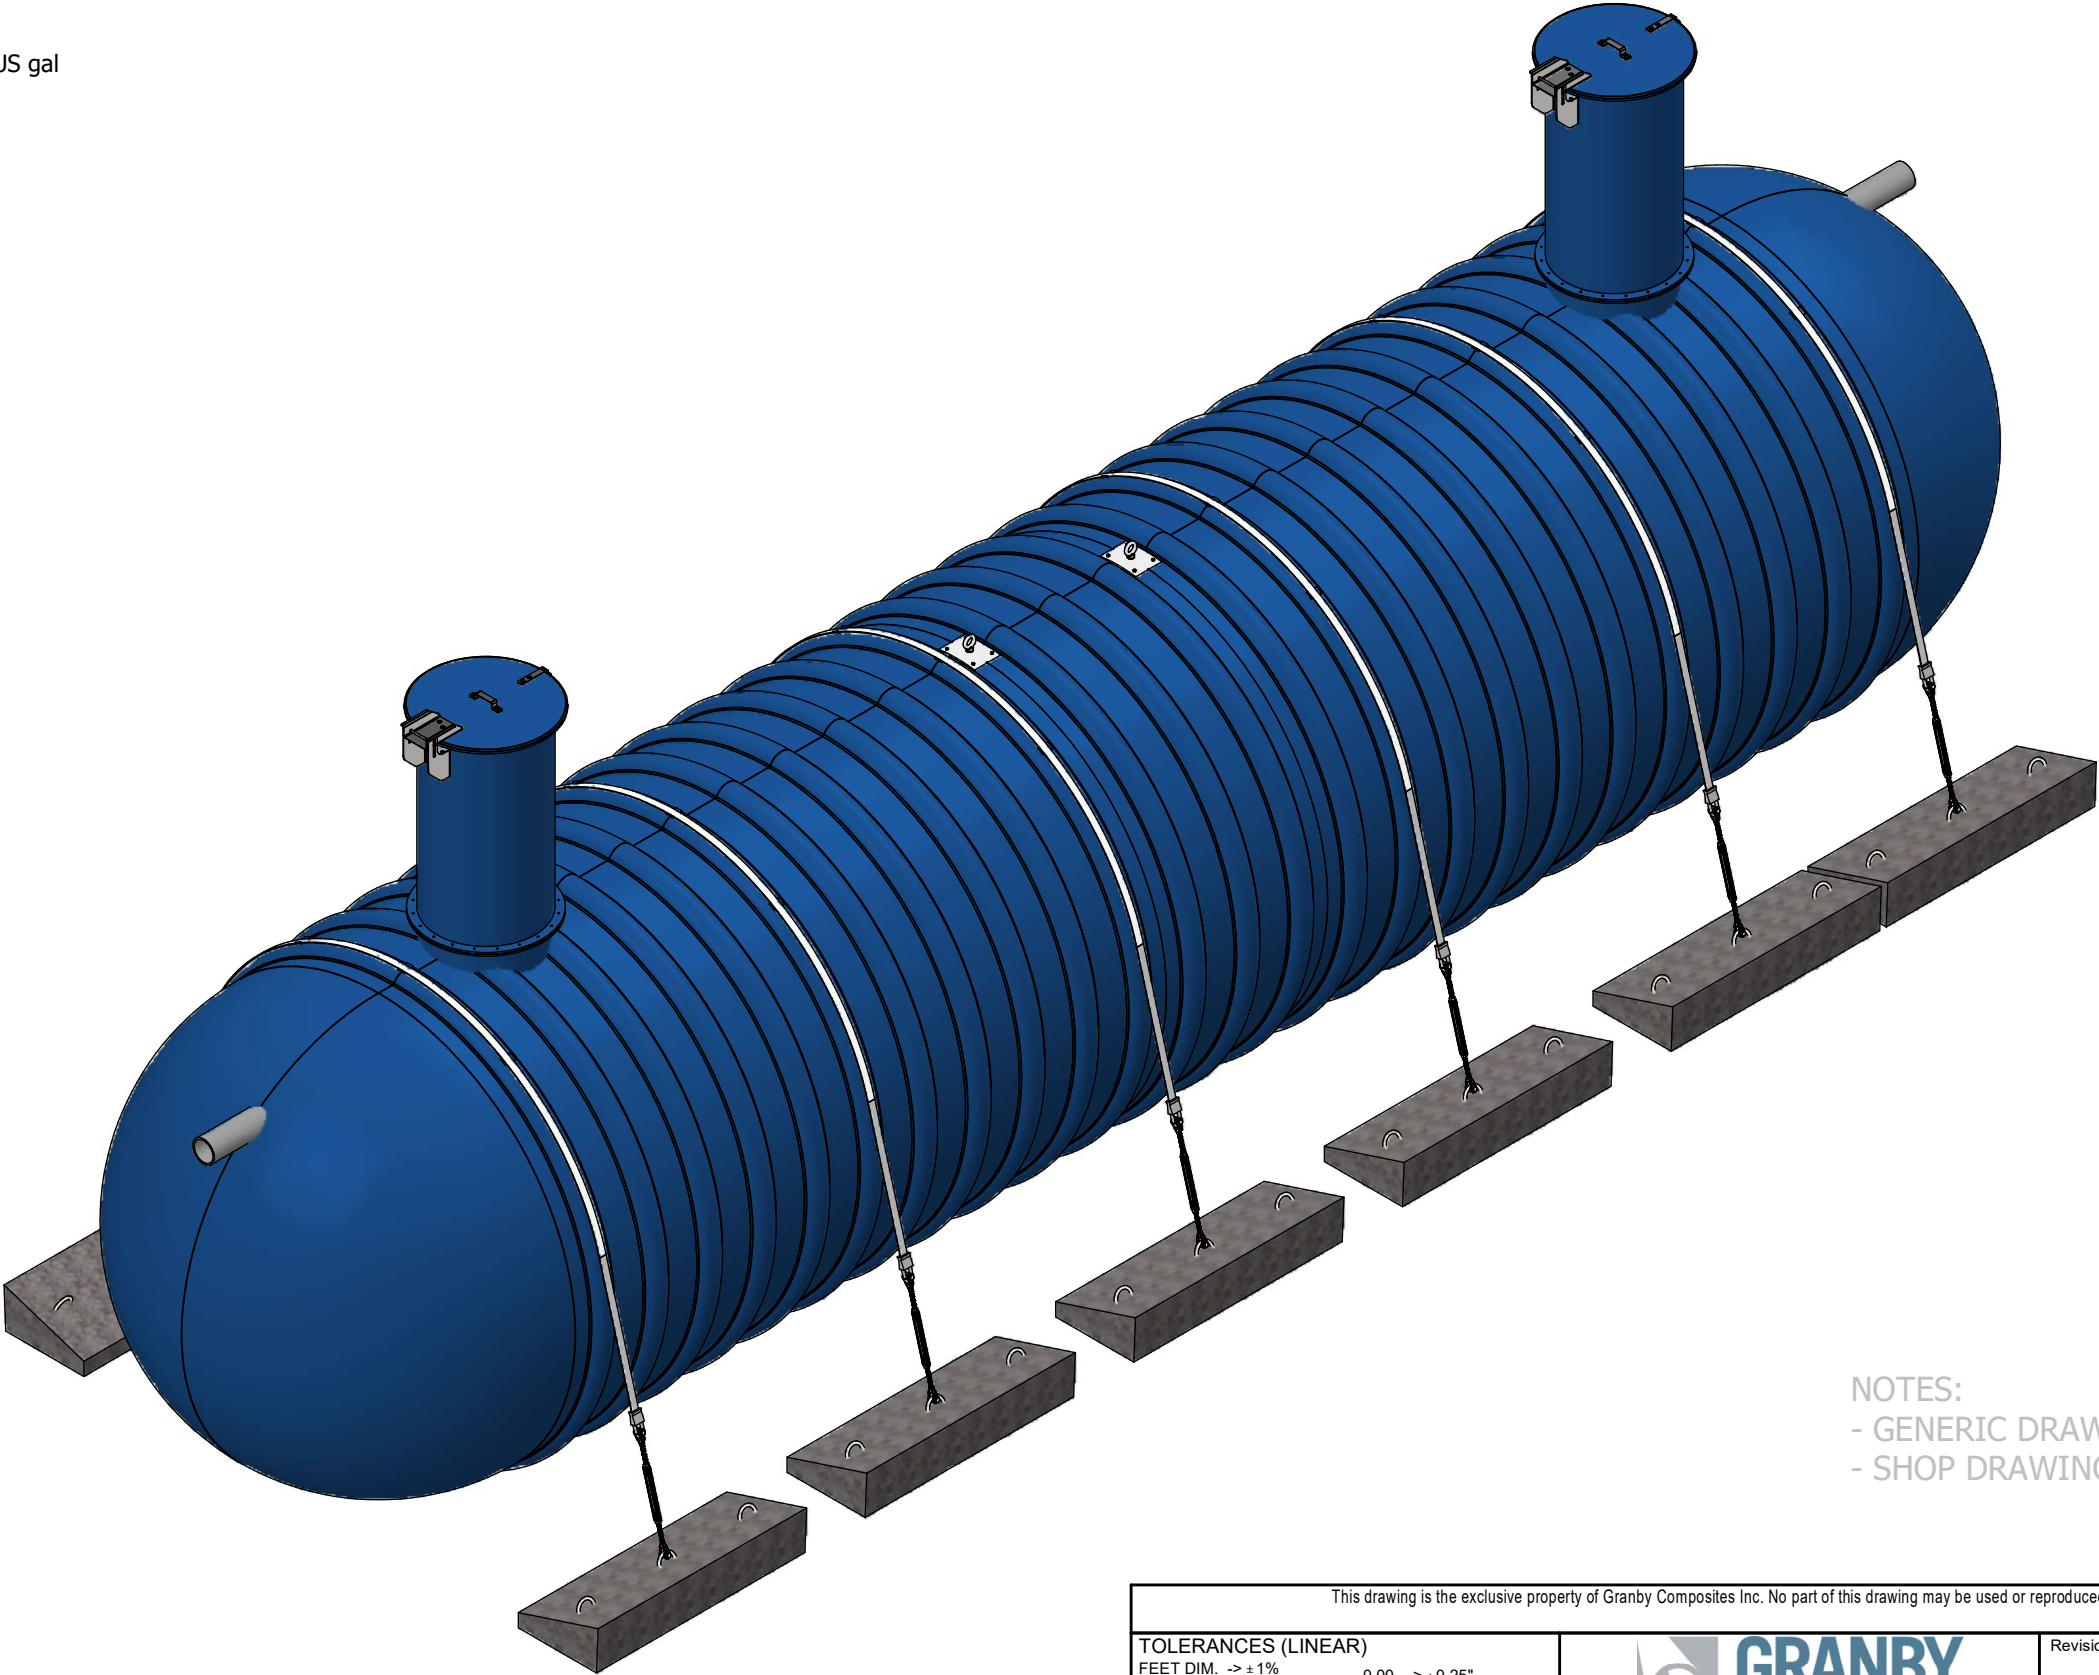


NOTES:
 - GENERIC DRAWING FOR REFERENCE ONLY
 - SHOP DRAWING AVAILABLE ON REQUEST

This drawing is the exclusive property of Granby Composites Inc. No part of this drawing may be used or reproduced in any manner without its written permission.						2019	
TOLERANCES (LINEAR)				Revision description			
FEET DIM. -> ± 1% 0.0 -> ± 0.5"				Format	Part no.	REV	
TOLERANCES (ANGULAR)		Drawn by O. Marin		B		NN10250920FS	02.
0 -> ± 2 DEG. 0.0 -> ± 0.5 DEG.				Title			
Weight : 7430 Lb		Approved by :		10' Dia. TANK - 24113 US gal			
Client		# Project		Sheet		1 / 4	

Item	Part Number	Qty	Description	Check List
1	ADF0000001	2	FOAM 28-3/4" DIA. x 8" / R-35	
2	ADP0000001	2	LIFTING LUG	
3	AEDPL52500	1	Polylok PL-525 PREFILTER	
4	ENSCOUR10	6	ANCHORING KIT	
5	FPT0600801	1	6" SCH.80 - UNTHREADED T GREY	
6	GMHE30-COVER01	2	30" DIA. FRP. - LOCKABLE MAN HOLE COVER WITH HINGE	
7	MH-30 (6"L.)	2	30" DIA. x 6" L. - MANHOLE	
8	MHE-30 (54"L.)	2	30" DIA. x 54" L. - MANHOLE EXTENSION	
9	MUR10	1	10' DIA. - WALL	
10	TP80600G01 (12"L.)	1	6" SCH.80 - GREY PVC PIPE	
11	TP80600G01 (24"L.)	1	6" SCH.80 - GREY PVC PIPE	
12	TP80600G01 (72"L.)	1	6" SCH.80 - GREY PVC PIPE	
13	TP80600G01 (75.875"L.)	1	6" SCH.80 - GREY PVC PIPE	
14	TP80600G01 (77"L.)	1	6" SCH.80 - GREY PVC PIPE	

BACKFILL PROPERTIES
N1 - 1/8" TO 3/4" PEA GRAVEL OR 1/2" CRUSHED STONE
N2 - PRIMARY BACKFILL, 1/8" TO 3/4" PEA GRAVEL OR 1/2" CRUSHED STONE
N3 - SECONDARY BACKFILL, COARSE SAND OR GRAVEL 1 1/2" OR LESS

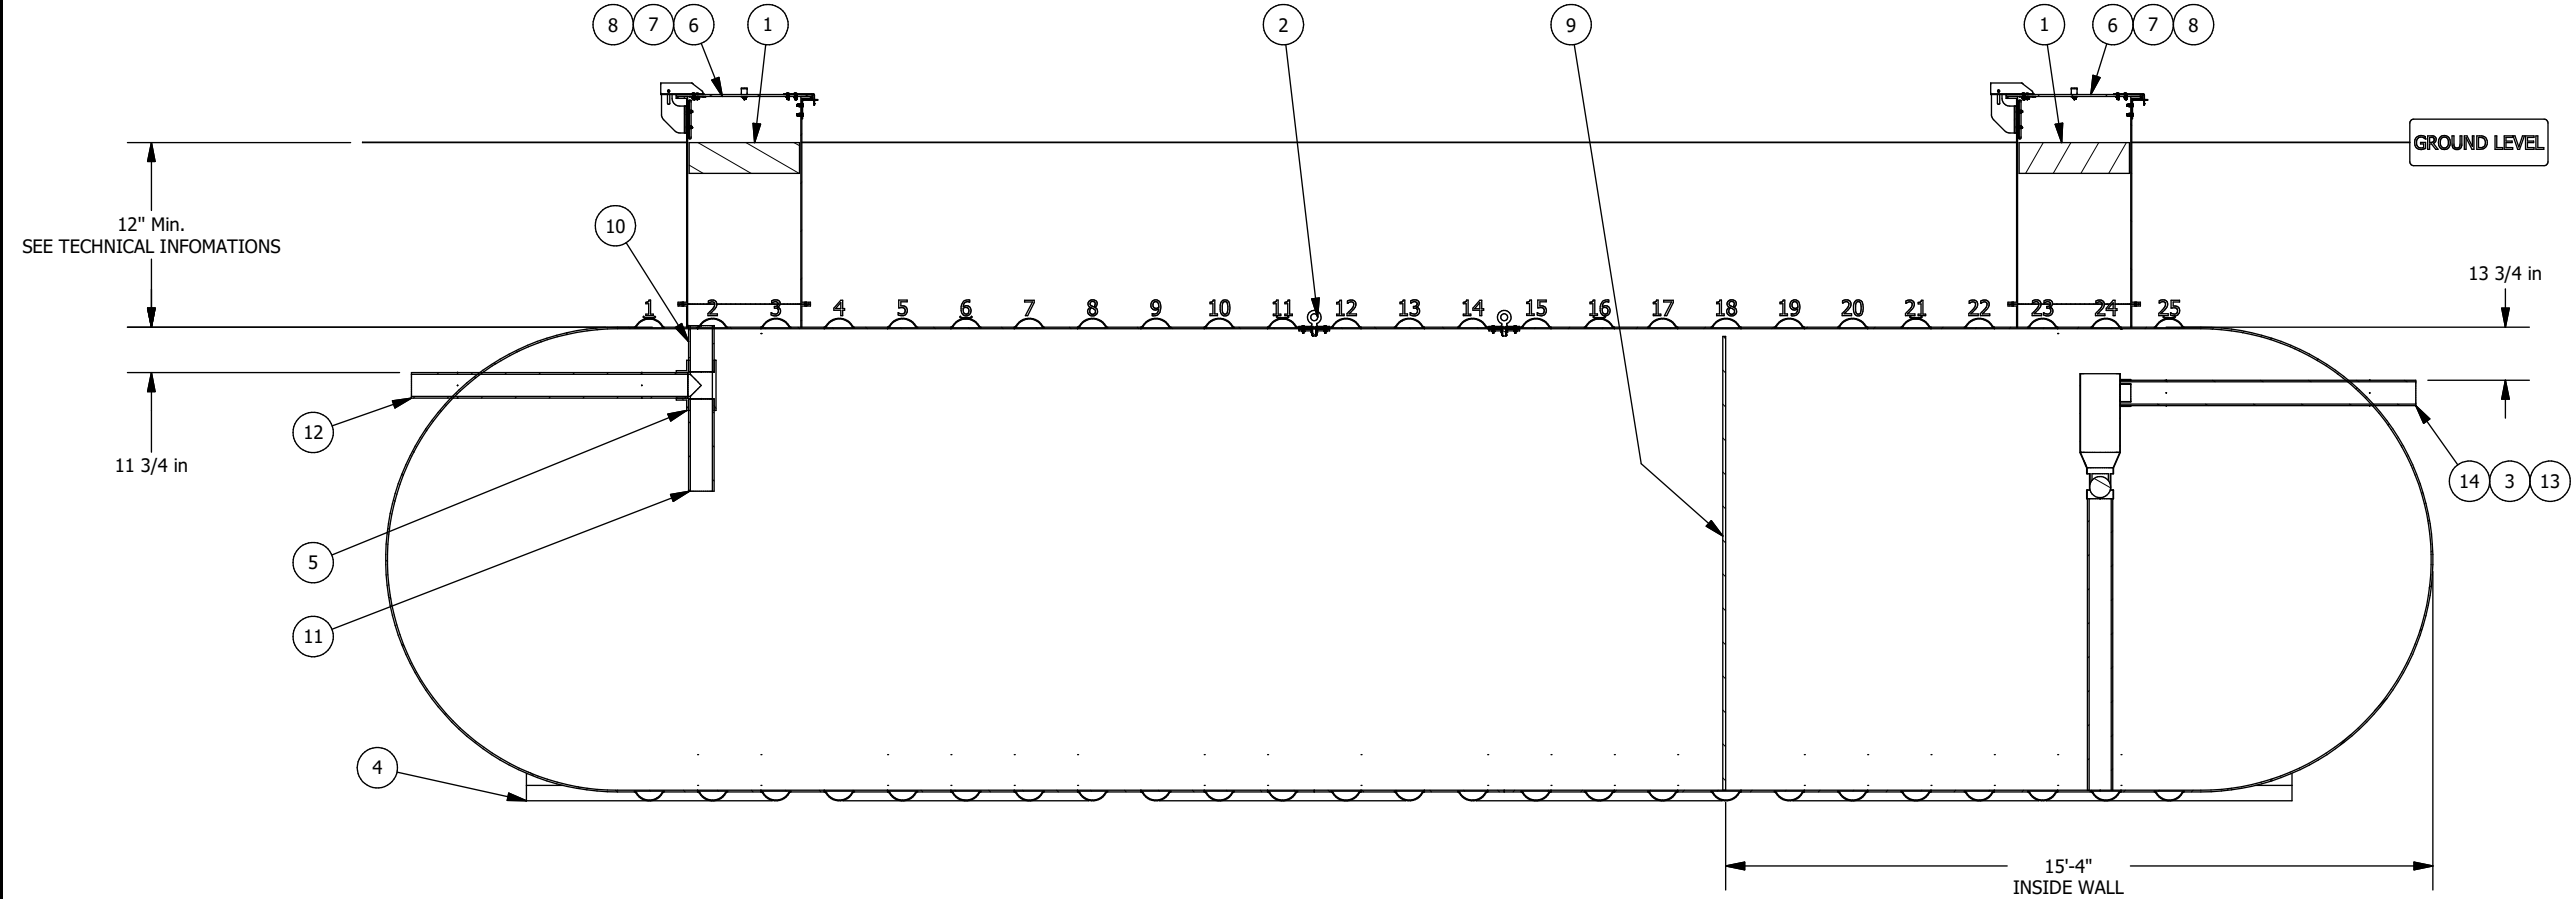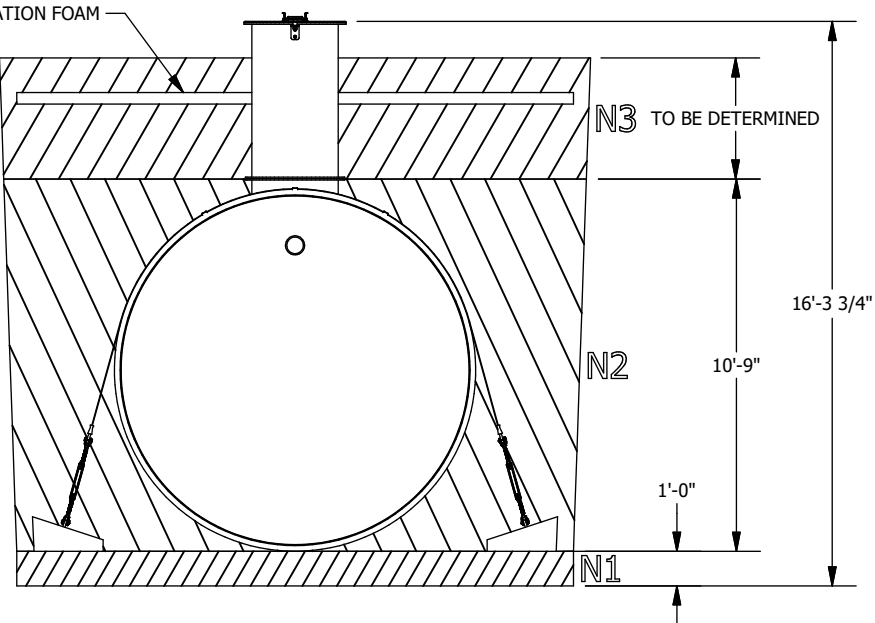

SECTION ELEVATION VIEW


Optional anchoring depending on the tank's environment

- Technical informations**
- Burrial depth: According to the geotechnical installation conditions
 - Inside Diameter : 120"
 - (If required) Quantity of fiberglass anchoring straps : 6
 - (If required) Quantity of reinforced concrete deadman anchors : 12
 - Simultaneous lifting by 2 lugs. The angle of the (chains or belts, etc.) must not be less than 60° from the horizontal.
 - The weight on the drawing does not include kits of belts and concrete blocks.
 - HS-20 rated for burial depth from 36 to 84 inches
 - Manufactured according to ANSI-AWWA D120 requirements
 - Airtightness test performed at the factory at 35 kPa

The tank must be installed in accordance with the manufacturer's instructions.
Optional effluent filter PL-525.

NOTES:
- GENERIC DRAWING FOR REFERENCE ONLY
- SHOP DRAWING AVAILABLE ON REQUEST


This drawing is the exclusive property of Granby Composites Inc. No part of this drawing may be used or reproduced in any manner without its written permission.					2019
TOLERANCES (LINEAR) FEET DIM. -> ± 1% 0.0 -> ± 0.5" 0.00 -> ± 0.25" 0.000 -> ± 0.125"		 GRANBY COMPOSITES		Revision description	
TOLERANCES (ANGULAR) 0 -> ± 2 DEG. 0.0 -> ± 0.5 DEG. 0.00 -> ± 0.1 DEG.		Drawn by O. Marin		19/01/2024	
Weight : 7430 Lb		Approved by :		Title 10' Dia. TANK - 24113 US gal	
Client		# Project			
		Sheet 2 / 4			

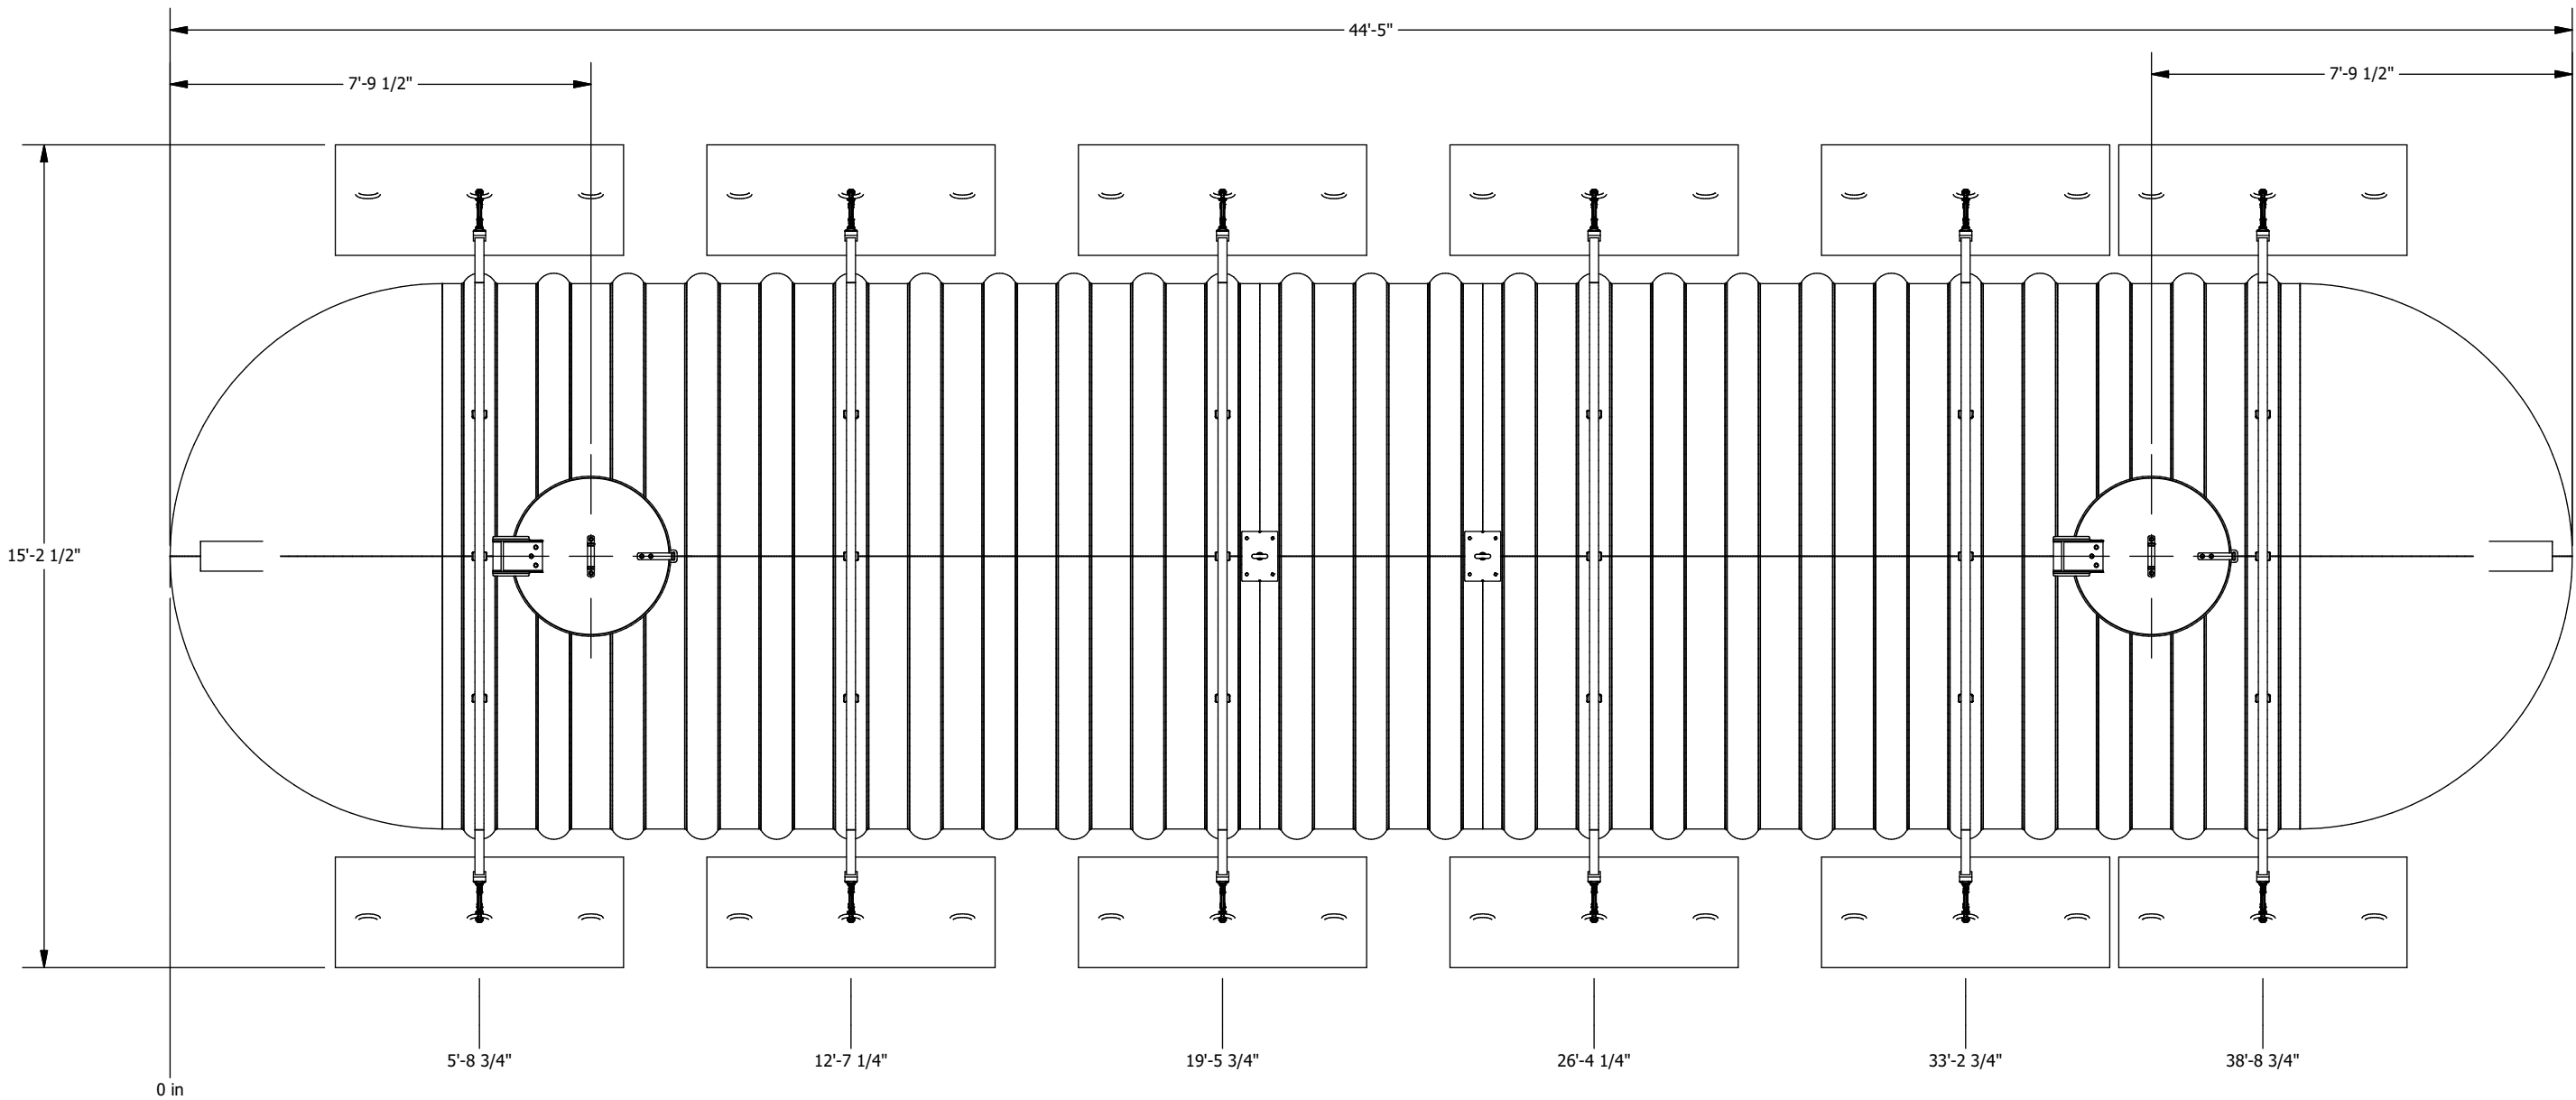


PLAN VIEW

NOTES:
- GENERIC DRAWING FOR REFERENCE ONLY
- SHOP DRAWING AVAILABLE ON REQUEST

This drawing is the exclusive property of Granby Composites Inc. No part of this drawing may be used or reproduced in any manner without its written permission.										2019
TOLERANCES (LINEAR) FEET DIM. -> ± 1% 0.0 -> ± 0.5"0.00 -> ± 0.25" 0.000 -> ± 0.125"					 GRANBY COMPOSITES		Revision description			
							Format	Part no.	REV	
TOLERANCES (ANGULAR) 0 -> ± 2 DEG. 0.0 -> ± 0.5 DEG.0.00 -> ± 0.1 DEG.					Drawn by O. Marin		19/01/2024		02.	
Weight : 7430 Lb					Approved by :				Title	
Client					# Projet		Sheet 3 / 4		10' Dia. TANK - 24113 US gal	

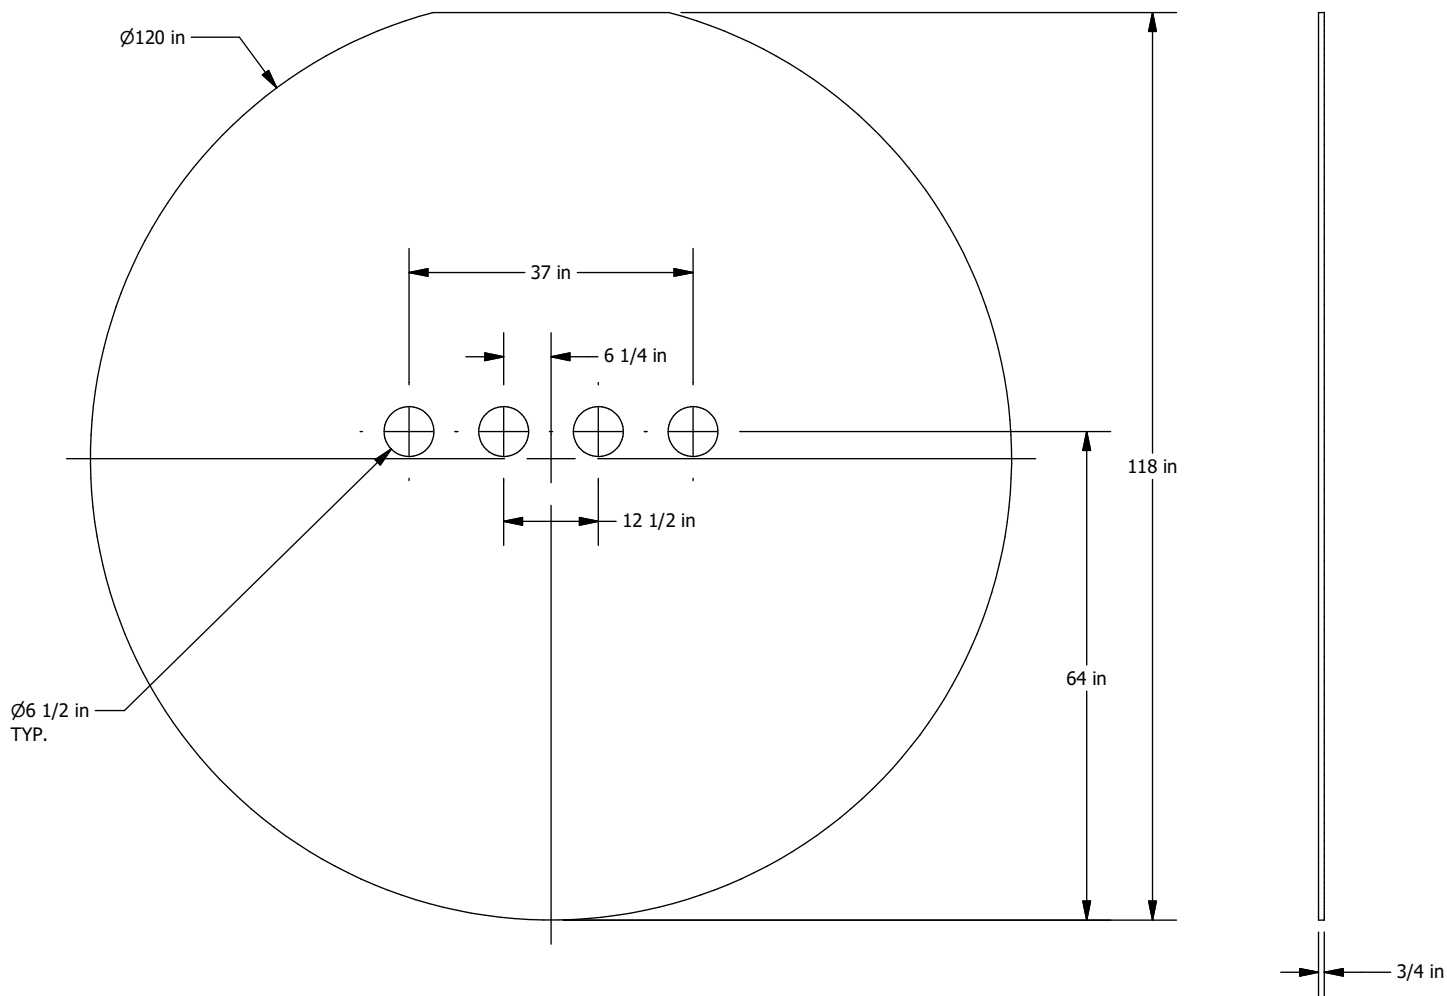

ITEM : MUR10

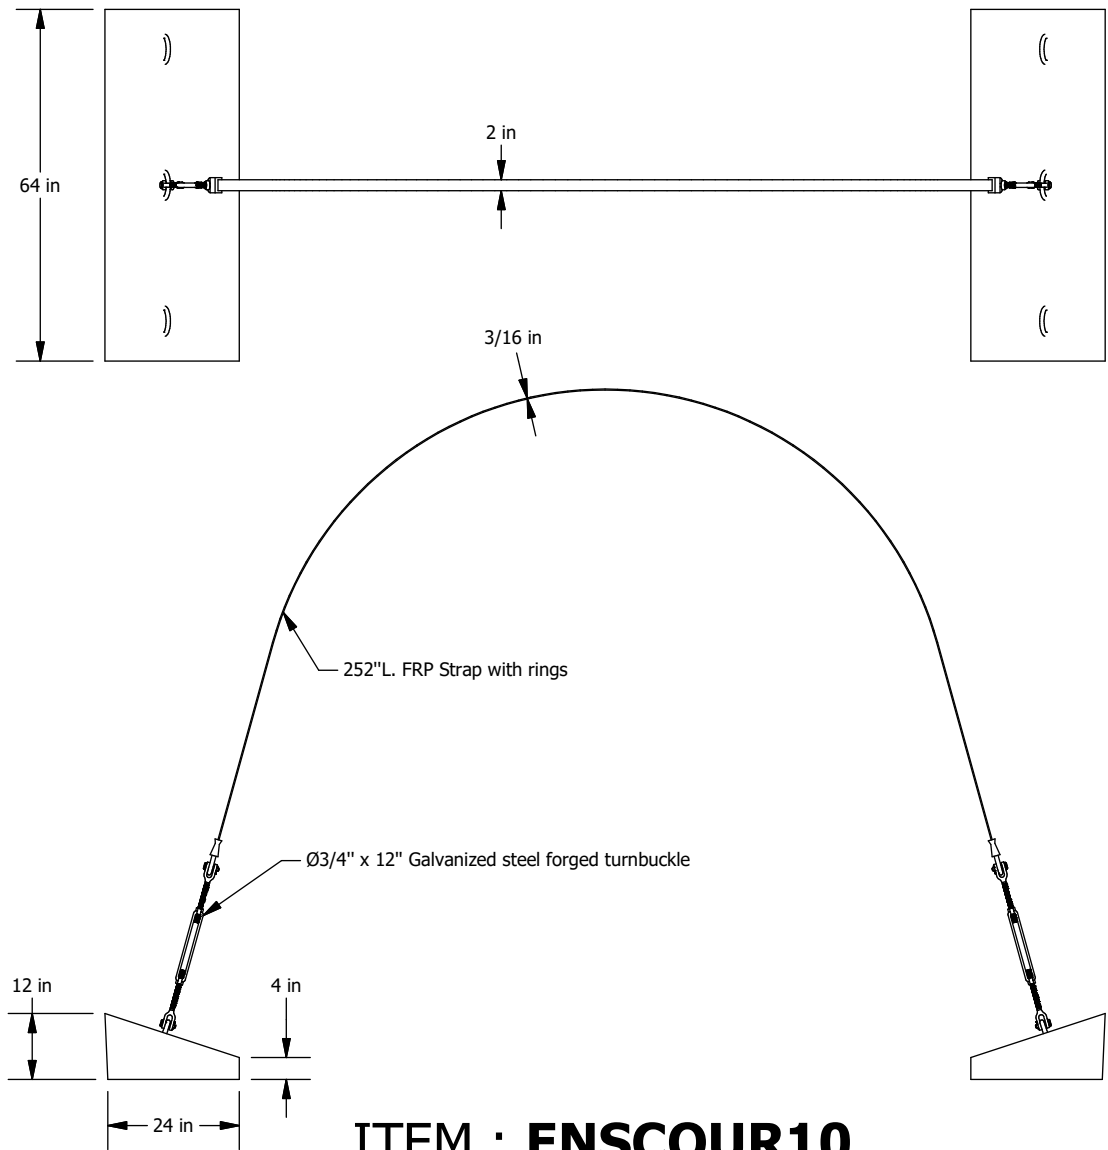

ITEM : ENSCOUR10

- Turnbuckle**
- Forged carbon steel, hot-dip galvanized
 - In accordance with US specifications FF-T-791B Type 1, Form 1 (open cage).
 - Safety factor 5:1
 - Working load 5,200 Lbs
- Concrete deadman anchor**
- Weight : 1,093 Lbs
 - Reinforced with galvanized steel
- Fiberglass strap**
- High quality fiberglass
 - Working load 20,000 Lbs
 - Ultimate rated 45,000 Lbs
 - Equipped with galvanized steel rings



Fiberglass Strap Guide
Directly installed on the tank

This drawing is the exclusive property of Granby Composites Inc. No part of this drawing may be used or reproduced in any manner without its written permission.					2019
TOLERANCES (LINEAR) FEET DIM. -> ± 1% 0.0 -> ± 0.5"		TOLERANCES (ANGULAR) 0 -> ± 2 DEG. 0.0 -> ± 0.5 DEG.		Weight :	
0.00 -> ± 0.25"		0.000 -> ± 0.125"			
Client		# Projet		Sheet 4 / 4	
Drawn by O. Marin		11/05/2021		Title 10' DIA. - WALL	
Approved by :					
Revision description		Format B		Part no. MUR10	
				REV 01.	



CAPACITY CHART FOR NN10250920 TANK

Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)
-		6	406	12	1161	18	2138	24	3283	30	4561	36	5942	42	7404	48	8923	54	10481	60	12057
1/8	2	6 1/8	419	12 1/8	1180	18 1/8	2160	24 1/8	3309	30 1/8	4589	36 1/8	5972	42 1/8	7435	48 1/8	8955	54 1/8	10513	60 1/8	12090
1/4	4	6 1/4	432	12 1/4	1198	18 1/4	2183	24 1/4	3334	30 1/4	4616	36 1/4	6002	42 1/4	7466	48 1/4	8987	54 1/4	10546	60 1/4	12123
3/8	7	6 3/8	446	12 3/8	1216	18 3/8	2205	24 3/8	3360	30 3/8	4644	36 3/8	6032	42 3/8	7497	48 3/8	9019	54 3/8	10579	60 3/8	12156
1/2	10	6 1/2	459	12 1/2	1235	18 1/2	2228	24 1/2	3385	30 1/2	4672	36 1/2	6061	42 1/2	7528	48 1/2	9052	54 1/2	10611	60 1/2	12188
5/8	14	6 5/8	472	12 5/8	1254	18 5/8	2250	24 5/8	3411	30 5/8	4700	36 5/8	6091	42 5/8	7559	48 5/8	9084	54 5/8	10644	60 5/8	12221
3/4	18	6 3/4	486	12 3/4	1273	18 3/4	2273	24 3/4	3436	30 3/4	4728	36 3/4	6121	42 3/4	7591	48 3/4	9116	54 3/4	10677	60 3/4	12254
7/8	22	6 7/8	500	12 7/8	1291	18 7/8	2296	24 7/8	3462	30 7/8	4756	36 7/8	6151	42 7/8	7622	48 7/8	9148	54 7/8	10710	60 7/8	12287
1	27	7	513	13	1310	19	2318	25	3488	31	4785	37	6181	43	7653	49	9180	55	10742	61	12320
1 1/8	33	7 1/8	527	13 1/8	1329	19 1/8	2341	25 1/8	3514	31 1/8	4813	37 1/8	6211	43 1/8	7685	49 1/8	9213	55 1/8	10775	61 1/8	12353
1 1/4	38	7 1/4	541	13 1/4	1349	19 1/4	2364	25 1/4	3540	31 1/4	4841	37 1/4	6241	43 1/4	7716	49 1/4	9245	55 1/4	10808	61 1/4	12386
1 3/8	44	7 3/8	556	13 3/8	1368	19 3/8	2387	25 3/8	3566	31 3/8	4869	37 3/8	6271	43 3/8	7747	49 3/8	9277	55 3/8	10841	61 3/8	12419
1 1/2	50	7 1/2	570	13 1/2	1387	19 1/2	2410	25 1/2	3591	31 1/2	4897	37 1/2	6301	43 1/2	7779	49 1/2	9310	55 1/2	10874	61 1/2	12452
1 5/8	56	7 5/8	585	13 5/8	1407	19 5/8	2433	25 5/8	3618	31 5/8	4926	37 5/8	6331	43 5/8	7810	49 5/8	9342	55 5/8	10906	61 5/8	12485
1 3/4	63	7 3/4	599	13 3/4	1426	19 3/4	2457	25 3/4	3644	31 3/4	4954	37 3/4	6361	43 3/4	7842	49 3/4	9374	55 3/4	10939	61 3/4	12517
1 7/8	70	7 7/8	614	13 7/8	1446	19 7/8	2480	25 7/8	3670	31 7/8	4983	37 7/8	6391	43 7/8	7873	49 7/8	9407	55 7/8	10972	61 7/8	12550
2	77	8	629	14	1465	20	2503	26	3696	32	5011	38	6422	44	7905	50	9439	56	11005	62	12583
2 1/8	85	8 1/8	644	14 1/8	1485	20 1/8	2527	26 1/8	3722	32 1/8	5040	38 1/8	6452	44 1/8	7936	50 1/8	9471	56 1/8	11038	62 1/8	12616
2 1/4	92	8 1/4	659	14 1/4	1505	20 1/4	2550	26 1/4	3749	32 1/4	5068	38 1/4	6482	44 1/4	7968	50 1/4	9504	56 1/4	11070	62 1/4	12649
2 3/8	100	8 3/8	674	14 3/8	1525	20 3/8	2574	26 3/8	3775	32 3/8	5097	38 3/8	6512	44 3/8	7999	50 3/8	9536	56 3/8	11103	62 3/8	12682
2 1/2	108	8 1/2	689	14 1/2	1545	20 1/2	2597	26 1/2	3801	32 1/2	5125	38 1/2	6543	44 1/2	8031	50 1/2	9568	56 1/2	11136	62 1/2	12715
2 5/8	116	8 5/8	705	14 5/8	1565	20 5/8	2621	26 5/8	3828	32 5/8	5154	38 5/8	6573	44 5/8	8062	50 5/8	9601	56 5/8	11169	62 5/8	12748
2 3/4	125	8 3/4	720	14 3/4	1585	20 3/4	2645	26 3/4	3854	32 3/4	5183	38 3/4	6603	44 3/4	8094	50 3/4	9633	56 3/4	11202	62 3/4	12780
2 7/8	133	8 7/8	736	14 7/8	1606	20 7/8	2668	26 7/8	3881	32 7/8	5211	38 7/8	6634	44 7/8	8126	50 7/8	9666	56 7/8	11235	62 7/8	12813
3	142	9	751	15	1626	21	2692	27	3907	33	5240	39	6664	45	8157	51	9698	57	11268	63	12846
3 1/8	151	9 1/8	767	15 1/8	1646	21 1/8	2716	27 1/8	3934	33 1/8	5269	39 1/8	6695	45 1/8	8189	51 1/8	9731	57 1/8	11300	63 1/8	12879
3 1/4	161	9 1/4	783	15 1/4	1667	21 1/4	2740	27 1/4	3961	33 1/4	5298	39 1/4	6725	45 1/4	8221	51 1/4	9763	57 1/4	11333	63 1/4	12912
3 3/8	170	9 3/8	799	15 3/8	1687	21 3/8	2764	27 3/8	3988	33 3/8	5327	39 3/8	6756	45 3/8	8252	51 3/8	9796	57 3/8	11366	63 3/8	12945
3 1/2	180	9 1/2	816	15 1/2	1708	21 1/2	2788	27 1/2	4014	33 1/2	5356	39 1/2	6786	45 1/2	8284	51 1/2	9828	57 1/2	11399	63 1/2	12978
3 5/8	189	9 5/8	832	15 5/8	1729	21 5/8	2812	27 5/8	4041	33 5/8	5385	39 5/8	6817	45 5/8	8316	51 5/8	9861	57 5/8	11432	63 5/8	13010
3 3/4	199	9 3/4	848	15 3/4	1750	21 3/4	2837	27 3/4	4068	33 3/4	5414	39 3/4	6848	45 3/4	8348	51 3/4	9893	57 3/4	11465	63 3/4	13043
3 7/8	210	9 7/8	865	15 7/8	1771	21 7/8	2861	27 7/8	4095	33 7/8	5443	39 7/8	6878	45 7/8	8379	51 7/8	9926	57 7/8	11498	63 7/8	13076
4	220	10	881	16	1792	22	2885	28	4122	34	5472	40	6909	46	8411	52	9958	58	11530	64	13109
4 1/8	230	10 1/8	898	16 1/8	1813	22 1/8	2910	28 1/8	4149	34 1/8	5501	40 1/8	6940	46 1/8	8443	52 1/8	9991	58 1/8	11563	64 1/8	13142
4 1/4	241	10 1/4	915	16 1/4	1834	22 1/4	2934	28 1/4	4176	34 1/4	5530	40 1/4	6970	46 1/4	8475	52 1/4	10023	58 1/4	11596	64 1/4	13175
4 3/8	252	10 3/8	932	16 3/8	1855	22 3/8	2959	28 3/8	4203	34 3/8	5559	40 3/8	7001	46 3/8	8507	52 3/8	10056	58 3/8	11629	64 3/8	13207
4 1/2	263	10 1/2	949	16 1/2	1876	22 1/2	2983	28 1/2	4231	34 1/2	5589	40 1/2	7032	46 1/2	8539	52 1/2	10089	58 1/2	11662	64 1/2	13240
4 5/8	274	10 5/8	966	16 5/8	1898	22 5/8	3008	28 5/8	4258	34 5/8	5618	40 5/8	7063	46 5/8	8571	52 5/8	10121	58 5/8	11695	64 5/8	13273
4 3/4	285	10 3/4	983	16 3/4	1919	22 3/4	3033	28 3/4	4285	34 3/4	5647	40 3/4	7094	46 3/4	8603	52 3/4	10154	58 3/4	11728	64 3/4	13306
4 7/8	297	10 7/8	1001	16 7/8	1941	22 7/8	3058	28 7/8	4313	34 7/8	5676	40 7/8	7125	46 7/8	8635	52 7/8	10186	58 7/8	11761	64 7/8	13339
5	308	11	1018	17	1962	23	3082	29	4340	35	5706	41	7155	47	8667	53	10219	59	11794	65	13371
5 1/8	320	11 1/8	1036	17 1/8	1984	23 1/8	3107	29 1/8	4367	35 1/8	5735	41 1/8	7186	47 1/8	8699	53 1/8	10252	59 1/8	11827	65 1/8	13404
5 1/4	332	11 1/4	1053	17 1/4	2006	23 1/4	3132	29 1/4	4395	35 1/4	5765	41 1/4	7217	47 1/4	8731	53 1/4	10284	59 1/4	11859	65 1/4	13437
5 3/8	344	11 3/8	1071	17 3/8	2028	23 3/8	3157	29 3/8	4422	35 3/8	5794	41 3/8	7248	47 3/8	8763	53 3/8	10317	59 3/8	11892	65 3/8	13470
5 1/2	356	11 1/2	1089	17 1/2	2050	23 1/2	3182	29 1/2	4450	35 1/2	5824	41 1/2	7279	47 1/2	8795	53 1/2	10350	59 1/2	11925	65 1/2	13502
5 5/8	369	11 5/8	1107	17 5/8	2072	23 5/8	3208	29 5/8	4478	35 5/8	5853	41 5/8	7310	47 5/8	8827	53 5/8	10382	59 5/8	11958	65 5/8	13535
5 3/4	381	11 3/4	1125	17 3/4	2094	23 3/4	3233	29 3/4	4505	35 3/4	5883	41 3/4	7341	47 3/4	8859	53 3/4	10415	59 3/4	11991	65 3/4	13568
5 7/8	394	11 7/8	1143	17 7/8	2116	23 7/8	3258	29 7/8	4533	35 7/8	5913	41 7/8	7372	47 7/8	8891	53 7/8	10448	59 7/8	12024	65 7/8	13601

** PRECISION IS ABOUT +/- 1%



CAPACITY CHART FOR NN10250920 TANK

Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)
66	13633	71	14933	76	16209	81	17449	86	18642	91	19774	96	20830	101	21795	106	22648	111	23362	116	23894
66 1/8	13666	71 1/8	14966	76 1/8	16241	81 1/8	17480	86 1/8	18671	91 1/8	19801	96 1/8	20856	101 1/8	21818	106 1/8	22668	111 1/8	23378	116 1/8	23904
66 1/4	13699	71 1/4	14998	76 1/4	16272	81 1/4	17510	86 1/4	18700	91 1/4	19828	96 1/4	20881	101 1/4	21841	106 1/4	22688	111 1/4	23394	116 1/4	23914
66 3/8	13731	71 3/8	15030	76 3/8	16304	81 3/8	17541	86 3/8	18729	91 3/8	19856	96 3/8	20906	101 3/8	21864	106 3/8	22707	111 3/8	23409	116 3/8	23924
66 1/2	13764	71 1/2	15062	76 1/2	16335	81 1/2	17571	86 1/2	18758	91 1/2	19883	96 1/2	20931	101 1/2	21886	106 1/2	22727	111 1/2	23425	116 1/2	23934
66 5/8	13797	71 5/8	15094	76 5/8	16366	81 5/8	17601	86 5/8	18787	91 5/8	19910	96 5/8	20956	101 5/8	21909	106 5/8	22746	111 5/8	23440	116 5/8	23944
66 3/4	13829	71 3/4	15126	76 3/4	16398	81 3/4	17632	86 3/4	18816	91 3/4	19937	96 3/4	20981	101 3/4	21931	106 3/4	22765	111 3/4	23455	116 3/4	23953
66 7/8	13862	71 7/8	15159	76 7/8	16429	81 7/8	17662	86 7/8	18845	91 7/8	19965	96 7/8	21006	101 7/8	21953	106 7/8	22784	111 7/8	23470	116 7/8	23962
67	13895	72	15191	77	16460	82	17692	87	18874	92	19992	97	21031	102	21976	107	22803	112	23485	117	23972
67 1/8	13927	72 1/8	15223	77 1/8	16492	82 1/8	17722	87 1/8	18902	92 1/8	20019	97 1/8	21056	102 1/8	21998	107 1/8	22822	112 1/8	23500	117 1/8	23980
67 1/4	13960	72 1/4	15255	77 1/4	16523	82 1/4	17753	87 1/4	18931	92 1/4	20046	97 1/4	21081	102 1/4	22020	107 1/4	22841	112 1/4	23515	117 1/4	23989
67 3/8	13993	72 3/8	15287	77 3/8	16554	82 3/8	17783	87 3/8	18960	92 3/8	20072	97 3/8	21106	102 3/8	22042	107 3/8	22860	112 3/8	23529	117 3/8	23998
67 1/2	14025	72 1/2	15319	77 1/2	16586	82 1/2	17813	87 1/2	18988	92 1/2	20099	97 1/2	21130	102 1/2	22064	107 1/2	22879	112 1/2	23544	117 1/2	24006
67 5/8	14058	72 5/8	15351	77 5/8	16617	82 5/8	17843	87 5/8	19017	92 5/8	20126	97 5/8	21155	102 5/8	22086	107 5/8	22897	112 5/8	23558	117 5/8	24014
67 3/4	14090	72 3/4	15383	77 3/4	16648	82 3/4	17873	87 3/4	19046	92 3/4	20153	97 3/4	21180	102 3/4	22108	107 3/4	22916	112 3/4	23572	117 3/4	24022
67 7/8	14123	72 7/8	15415	77 7/8	16679	82 7/8	17903	87 7/8	19074	92 7/8	20180	97 7/8	21204	102 7/8	22130	107 7/8	22934	112 7/8	23586	117 7/8	24029
68	14155	73	15447	78	16710	83	17933	88	19103	93	20206	98	21228	103	22151	108	22952	113	23600	118	24037
68 1/8	14188	73 1/8	15479	78 1/8	16741	83 1/8	17963	88 1/8	19131	93 1/8	20233	98 1/8	21253	103 1/8	22173	108 1/8	22971	113 1/8	23614	118 1/8	24044
68 1/4	14221	73 1/4	15511	78 1/4	16772	83 1/4	17993	88 1/4	19160	93 1/4	20259	98 1/4	21277	103 1/4	22194	108 1/4	22989	113 1/4	23628	118 1/4	24051
68 3/8	14253	73 3/8	15543	78 3/8	16803	83 3/8	18023	88 3/8	19188	93 3/8	20286	98 3/8	21301	103 3/8	22216	108 3/8	23007	113 3/8	23641	118 3/8	24057
68 1/2	14286	73 1/2	15575	78 1/2	16834	83 1/2	18052	88 1/2	19216	93 1/2	20312	98 1/2	21326	103 1/2	22237	108 1/2	23025	113 1/2	23655	118 1/2	24064
68 5/8	14318	73 5/8	15607	78 5/8	16865	83 5/8	18082	88 5/8	19245	93 5/8	20339	98 5/8	21350	103 5/8	22259	108 5/8	23043	113 5/8	23668	118 5/8	24070
68 3/4	14351	73 3/4	15639	78 3/4	16896	83 3/4	18112	88 3/4	19273	93 3/4	20365	98 3/4	21374	103 3/4	22280	108 3/4	23060	113 3/4	23681	118 3/4	24076
68 7/8	14383	73 7/8	15671	78 7/8	16927	83 7/8	18142	88 7/8	19301	93 7/8	20392	98 7/8	21398	103 7/8	22301	108 7/8	23078	113 7/8	23694	118 7/8	24081
69	14416	74	15702	79	16958	84	18171	89	19329	94	20418	99	21422	104	22322	109	23096	114	23707	119	24086
69 1/8	14448	74 1/8	15734	79 1/8	16989	84 1/8	18201	89 1/8	19357	94 1/8	20444	99 1/8	21445	104 1/8	22343	109 1/8	23113	114 1/8	23720	119 1/8	24091
69 1/4	14480	74 1/4	15766	79 1/4	17020	84 1/4	18231	89 1/4	19385	94 1/4	20470	99 1/4	21469	104 1/4	22364	109 1/4	23130	114 1/4	23733	119 1/4	24096
69 3/8	14513	74 3/8	15798	79 3/8	17051	84 3/8	18260	89 3/8	19413	94 3/8	20496	99 3/8	21493	104 3/8	22385	109 3/8	23148	114 3/8	23745	119 3/8	24100
69 1/2	14545	74 1/2	15830	79 1/2	17082	84 1/2	18290	89 1/2	19441	94 1/2	20522	99 1/2	21517	104 1/2	22406	109 1/2	23165	114 1/2	23758	119 1/2	24104
69 5/8	14578	74 5/8	15861	79 5/8	17113	84 5/8	18319	89 5/8	19469	94 5/8	20548	99 5/8	21540	104 5/8	22426	109 5/8	23182	114 5/8	23770	119 5/8	24107
69 3/4	14610	74 3/4	15893	79 3/4	17143	84 3/4	18349	89 3/4	19497	94 3/4	20574	99 3/4	21564	104 3/4	22447	109 3/4	23199	114 3/4	23782	119 3/4	24110
69 7/8	14642	74 7/8	15925	79 7/8	17174	84 7/8	18378	89 7/8	19525	94 7/8	20600	99 7/8	21587	104 7/8	22467	109 7/8	23216	114 7/8	23794	119 7/8	24112
70	14675	75	15956	80	17205	85	18408	90	19553	95	20626	100	21611	105	22488	110	23232	115	23805		
70 1/8	14707	75 1/8	15988	80 1/8	17235	85 1/8	18437	90 1/8	19581	95 1/8	20652	100 1/8	21634	105 1/8	22508	110 1/8	23249	115 1/8	23817		
70 1/4	14740	75 1/4	16020	80 1/4	17266	85 1/4	18467	90 1/4	19608	95 1/4	20677	100 1/4	21657	105 1/4	22528	110 1/4	23265	115 1/4	23829		
70 3/8	14772	75 3/8	16051	80 3/8	17297	85 3/8	18496	90 3/8	19636	95 3/8	20703	100 3/8	21680	105 3/8	22549	110 3/8	23282	115 3/8	23840		
70 1/2	14804	75 1/2	16083	80 1/2	17327	85 1/2	18525	90 1/2	19664	95 1/2	20729	100 1/2	21704	105 1/2	22569	110 1/2	23298	115 1/2	23851		
70 5/8	14836	75 5/8	16115	80 5/8	17358	85 5/8	18554	90 5/8	19691	95 5/8	20754	100 5/8	21727	105 5/8	22589	110 5/8	23314	115 5/8	23862		
70 3/4	14869	75 3/4	16146	80 3/4	17388	85 3/4	18584	90 3/4	19719	95 3/4	20780	100 3/4	21750	105 3/4	22609	110 3/4	23330	115 3/4	23873		
70 7/8	14901	75 7/8	16178	80 7/8	17419	85 7/8	18613	90 7/8	19746	95 7/8	20805	100 7/8	21773	105 7/8	22629	110 7/8	23346	115 7/8	23883		

** PRECISION IS ABOUT +/- 1%