


NN10260942FS

FIBERGLASS TANK
 TOTAL CAPACITY : 24921 US gal
 NOMINAL CAPACITY (EFFECTIVE) : 22426 US gal


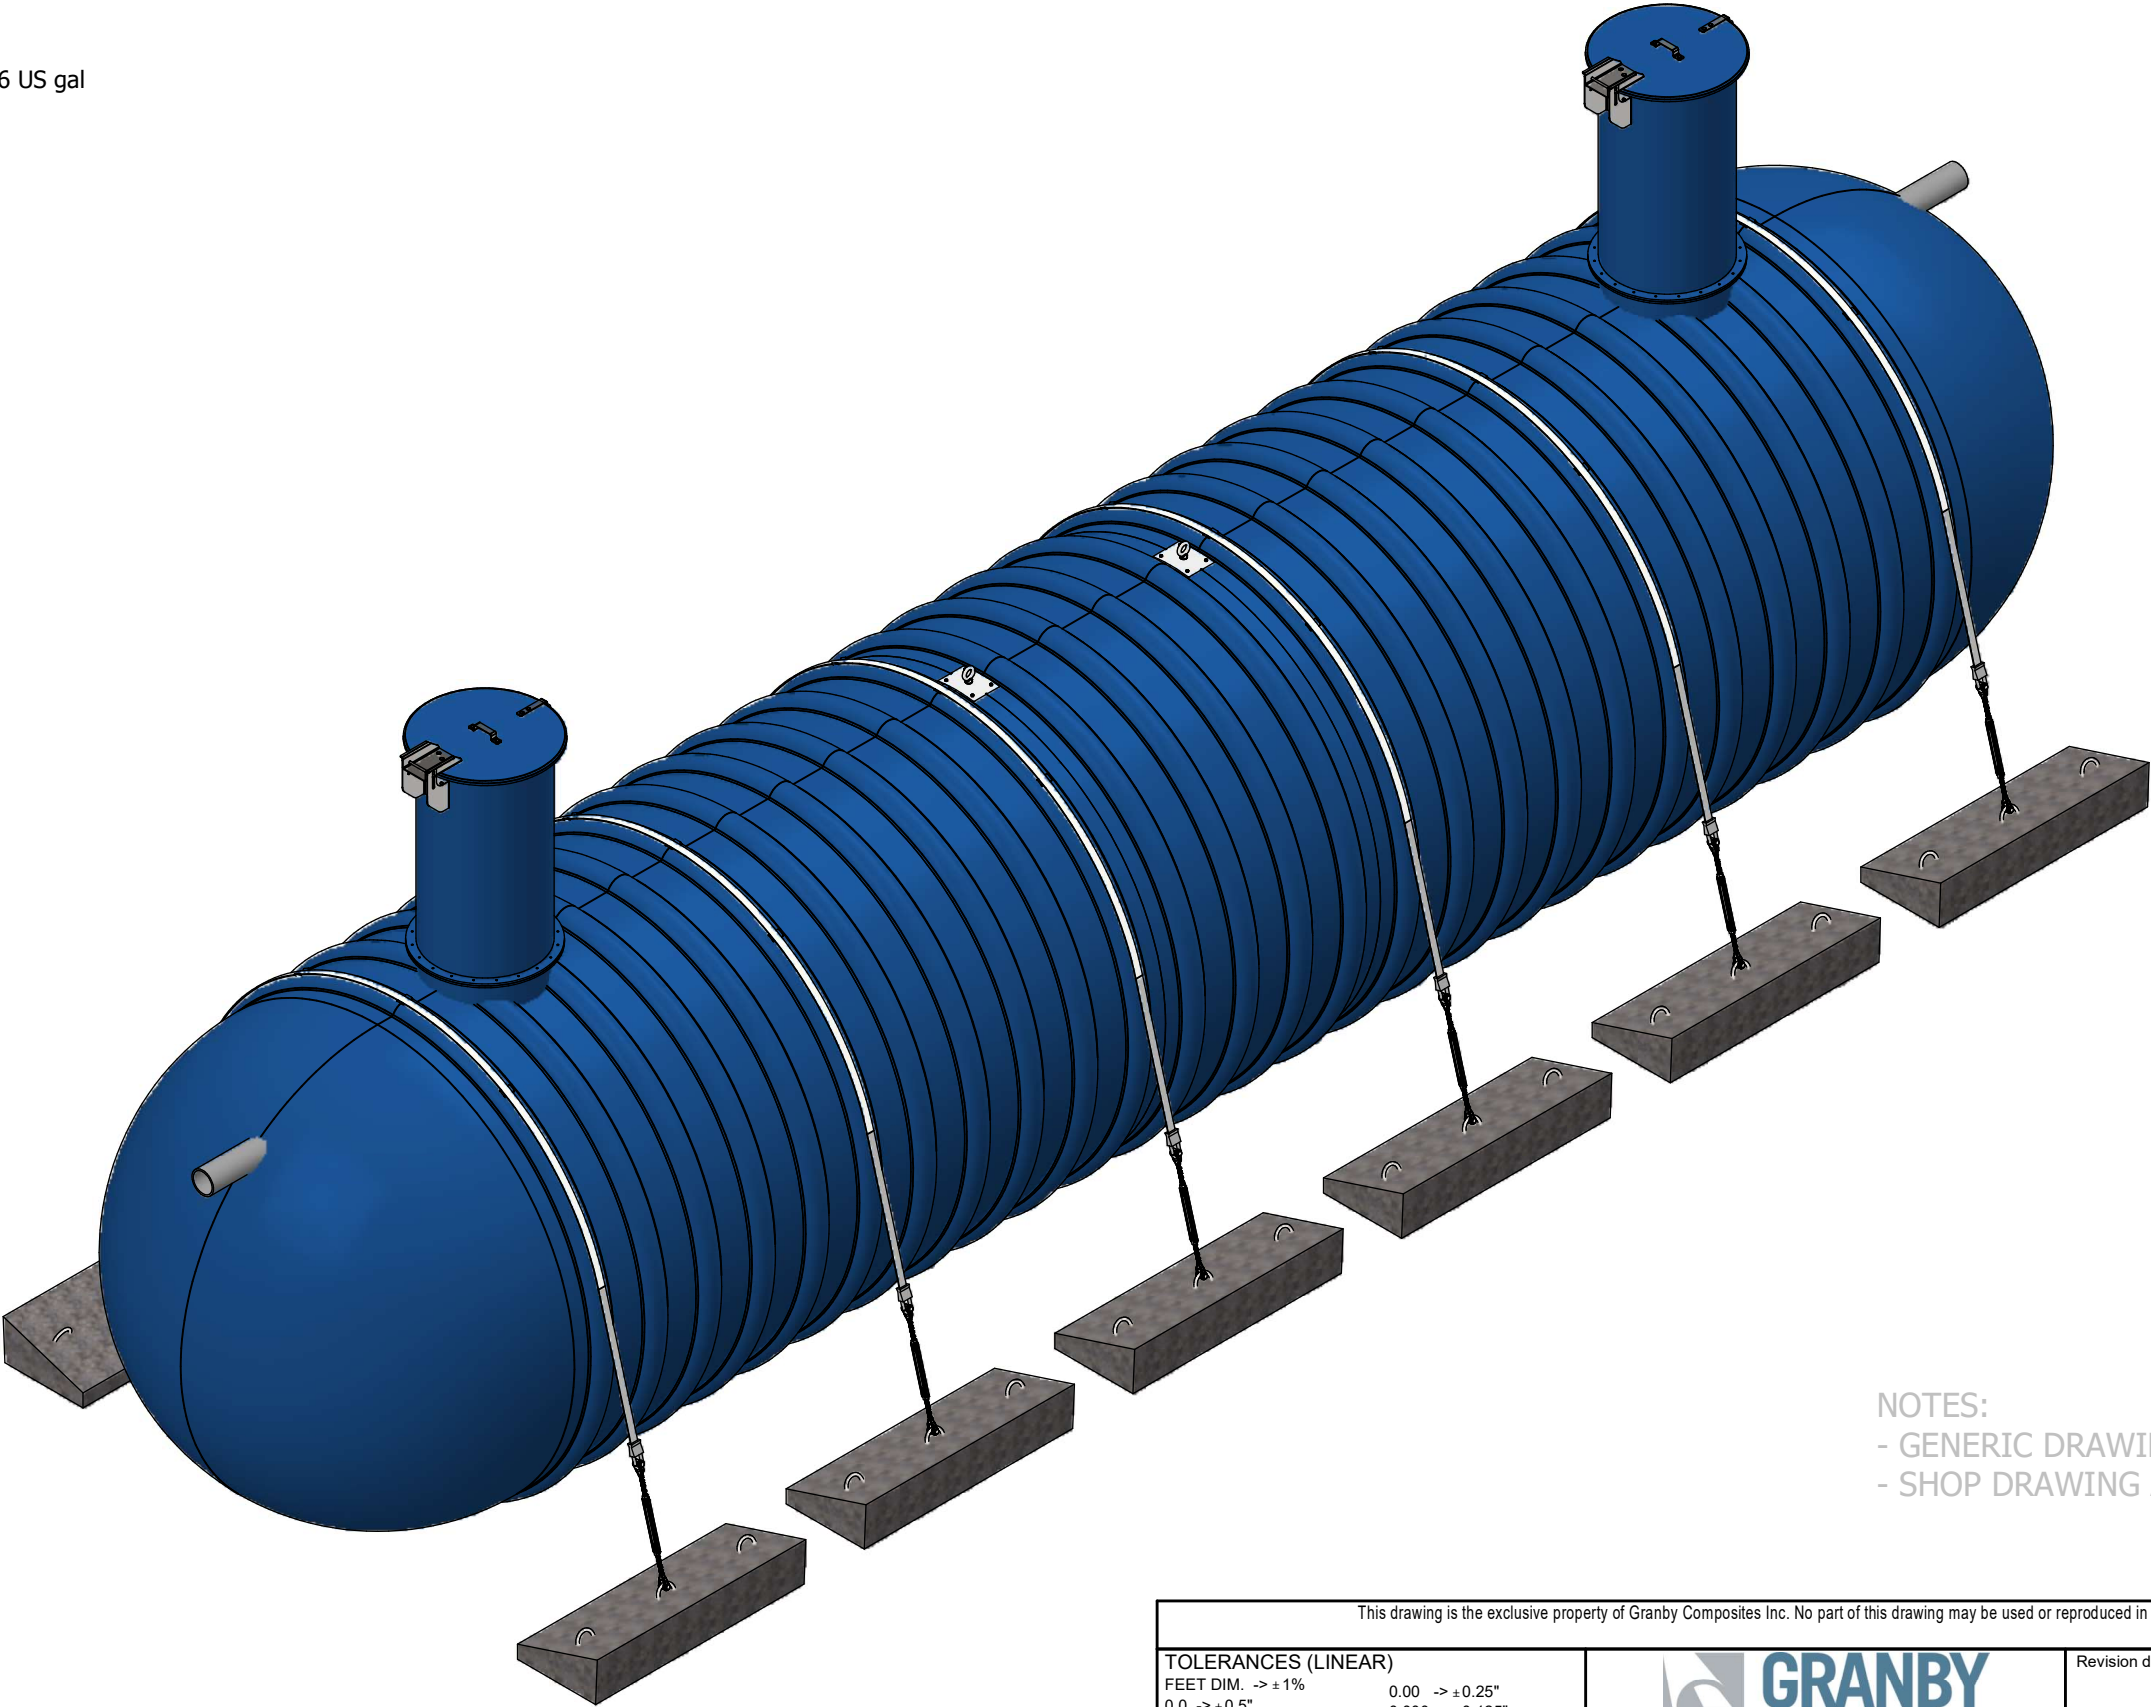


NOTES:
 - GENERIC DRAWING FOR REFERENCE ONLY
 - SHOP DRAWING AVAILABLE ON REQUEST

This drawing is the exclusive property of Granby Composites Inc. No part of this drawing may be used or reproduced in any manner without its written permission.					2019
TOLERANCES (LINEAR)		 GRANBY COMPOSITES	Revision description		
FEET DIM. -> ± 1% 0.0 -> ± 0.5"			Format B		Part no. NN10260942FS
0.00 -> ± 0.25" 0.000 -> ± 0.125"			REV 02.		
TOLERANCES (ANGULAR)		Drawn by O. Marin	19/01/2024		
0 -> ± 2 DEG. 0.0 -> ± 0.5 DEG.		Approved by :	Title		
Weight : 7628 Lb			10' Dia. TANK - 24921 US gal		
Client	# Project	Sheet 1 / 4			

Item	Part Number	Qty	Description	Check List
1	ADF0000001	2	FOAM 28-3/4" DIA. x 8" / R-35	
2	ADP0000001	2	LIFTING LUG	
3	AEDPL52500	1	Polylok PL-525 PREFILTER	
4	ENSCOUR10	6	ANCHORING KIT	
5	FPT0600801	1	6" SCH.80 - UNTHREADED T GREY	
6	GMHE30-COVER01	2	30" DIA. FRP. - LOCKABLE MAN HOLE COVER WITH HINGE	
7	MH-30 (6"L.)	2	30" DIA. x 6" L. - MANHOLE	
8	MHE-30 (54"L.)	2	30" DIA. x 54" L. - MANHOLE EXTENSION	
9	MUR10	1	10' DIA. - WALL	
10	TP80600G01 (12"L.)	1	6" SCH.80 - GREY PVC PIPE	
11	TP80600G01 (24"L.)	1	6" SCH.80 - GREY PVC PIPE	
12	TP80600G01 (72"L.)	1	6" SCH.80 - GREY PVC PIPE	
13	TP80600G01 (75.875"L.)	1	6" SCH.80 - GREY PVC PIPE	
14	TP80600G01 (77"L.)	1	6" SCH.80 - GREY PVC PIPE	

BACKFILL PROPERTIES
N1 - 1/8" TO 3/4" PEA GRAVEL OR 1/2" CRUSHED STONE
N2 - PRIMARY BACKFILL, 1/8" TO 3/4" PEA GRAVEL OR 1/2" CRUSHED STONE
N3 - SECONDARY BACKFILL, COARSE SAND OR GRAVEL 1 1/2" OR LESS

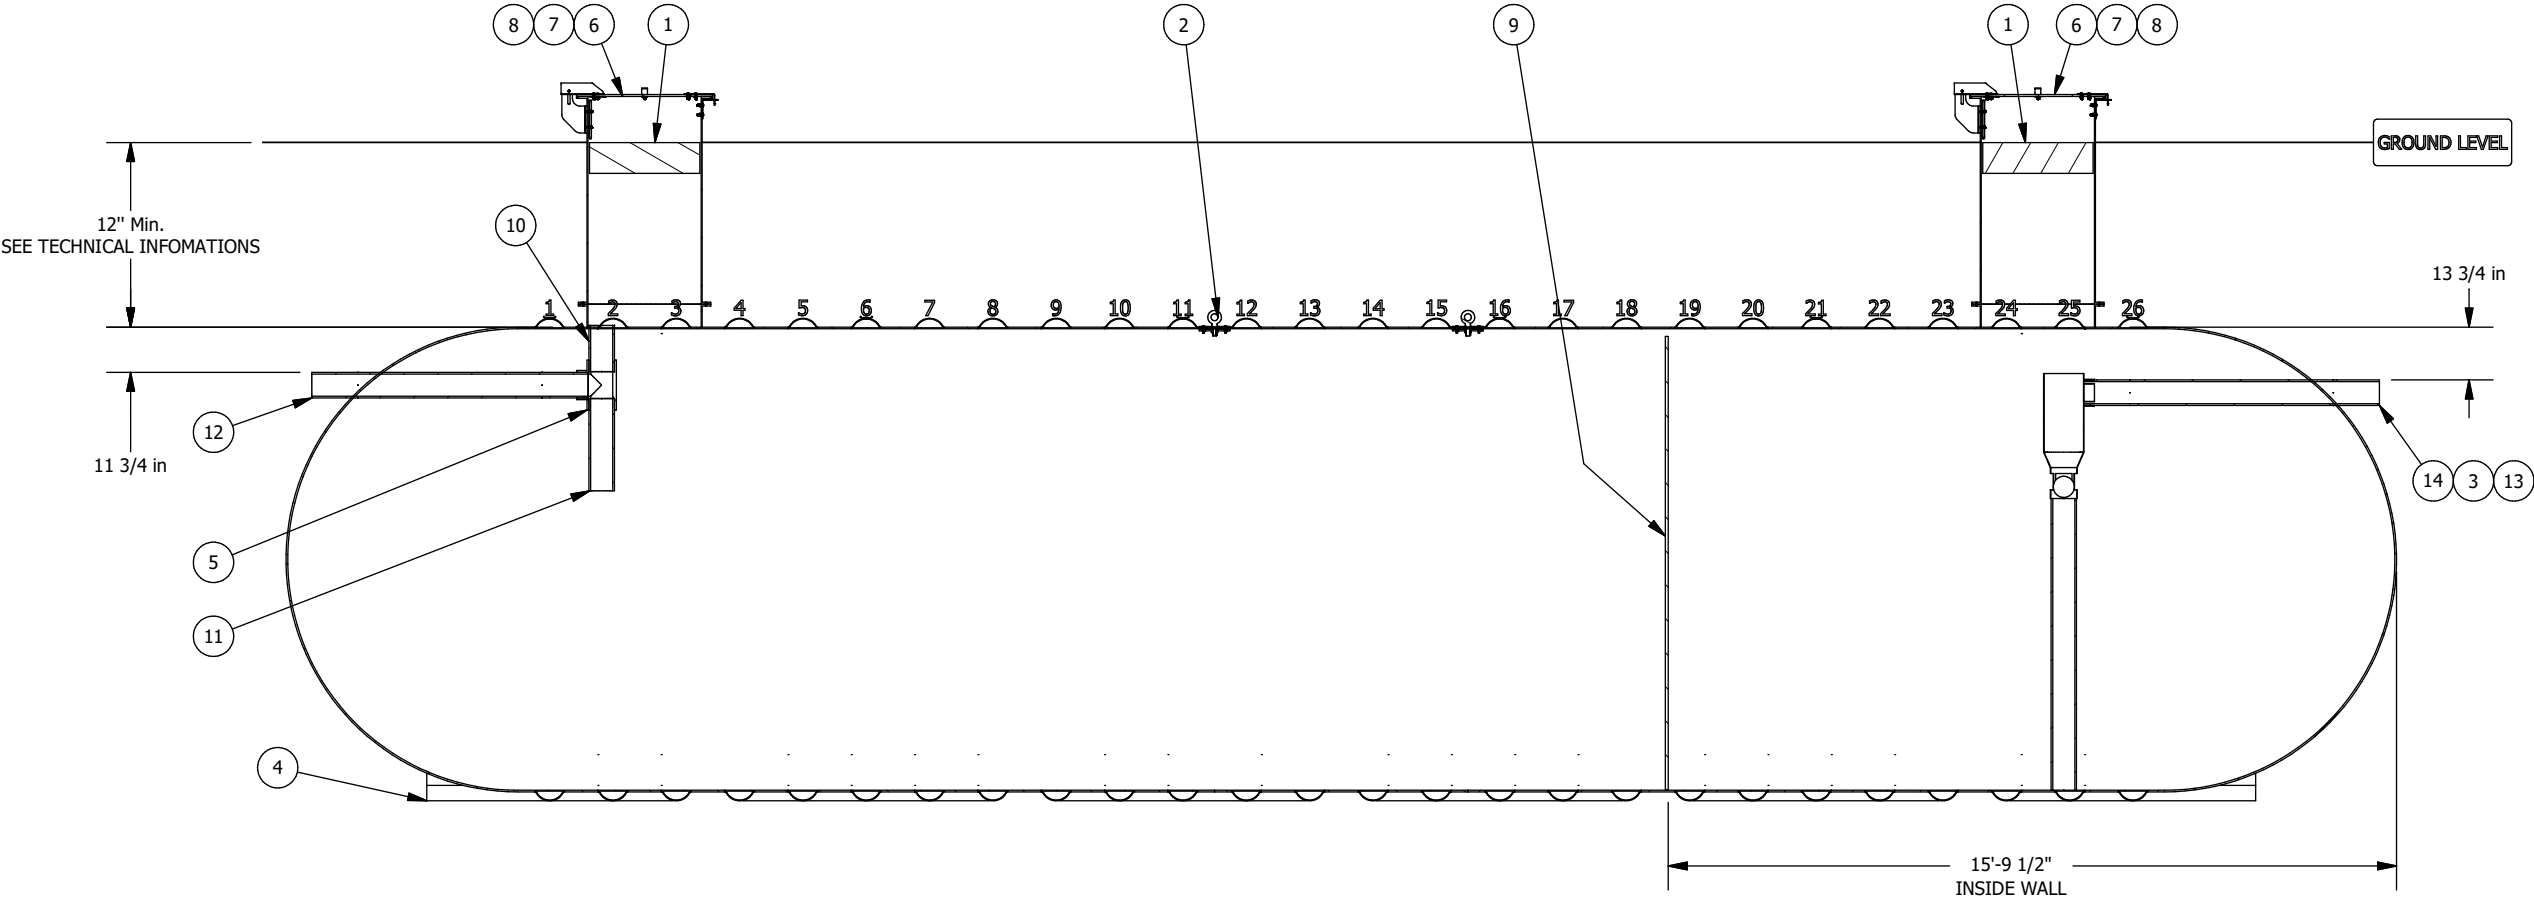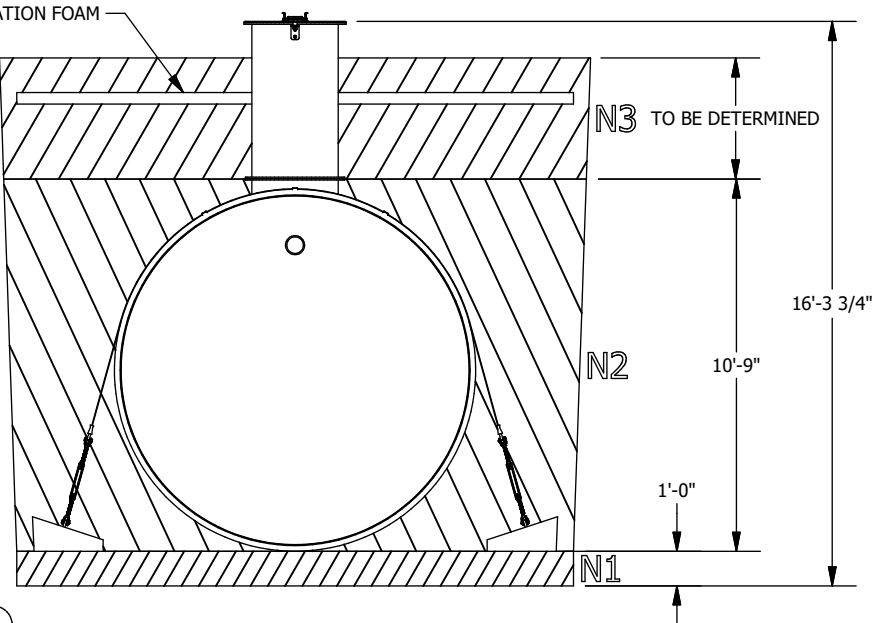

Optional anchoring depending on the tank's environment


SECTION ELEVATION VIEW

NOTES:
- GENERIC DRAWING FOR REFERENCE ONLY
- SHOP DRAWING AVAILABLE ON REQUEST

- Technical informations**
- Burrial depth: According to the geotechnical installation conditions
 - Inside Diameter : 120"
 - (If required) Quantity of fiberglass anchoring straps : 6
 - (If required) Quantity of reinforced concrete deadman anchors : 12
 - Simultaneous lifting by 2 lugs. The angle of the (chains or belts, etc.) must not be less than 60° from the horizontal.
 - The weight on the drawing does not include kits of belts and concrete blocks.
 - HS-20 rated for burial depth from 36 to 84 inches
 - Manufactured according to ANSI-AWWA D120 requirements
 - Airtightness test performed at the factory at 35 kPa

The tank must be installed in accordance with the manufacturer's instructions.
Optional effluent filter PL-525.


This drawing is the exclusive property of Granby Composites Inc. No part of this drawing may be used or reproduced in any manner without its written permission.					2019
TOLERANCES (LINEAR) FEET DIM. -> ± 1% 0.0 -> ± 0.5" 0.00 -> ± 0.25" 0.000 -> ± 0.125"		 GRANBY COMPOSITES		Revision description	
TOLERANCES (ANGULAR) 0 -> ± 2 DEG. 0.0 -> ± 0.5 DEG. 0.00 -> ± 0.1 DEG.		Drawn by O. Marin		19/01/2024	
Weight : 7628 Lb		Approved by :			
Client		# Project		Sheet 2 / 4	
Title 10' Dia. TANK - 24921 US gal					
Format B		Part no. NN10260942FS			REV 02.

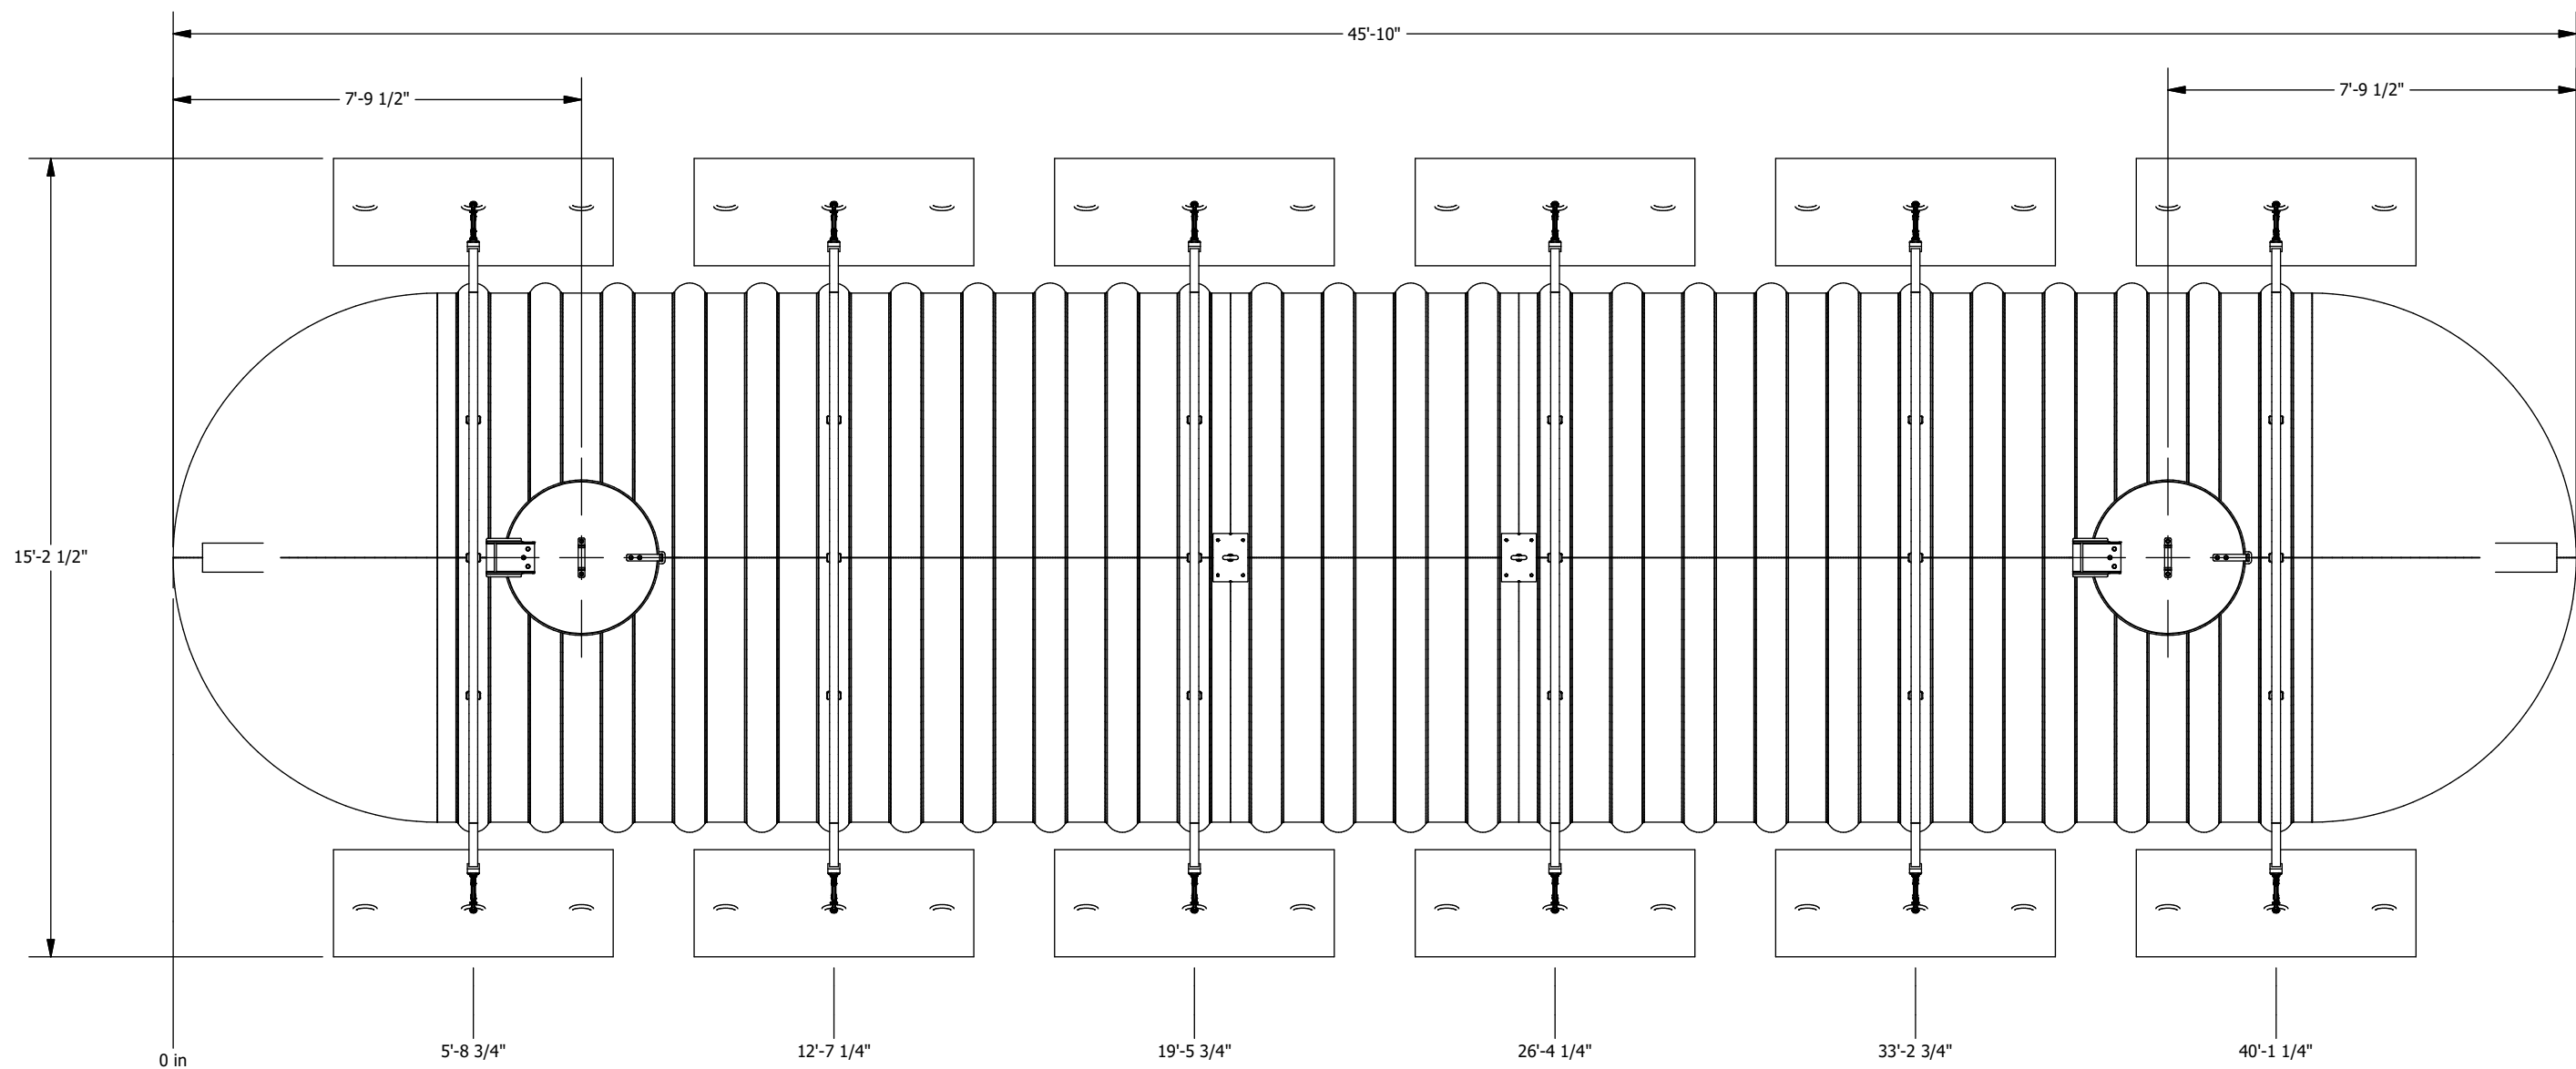


PLAN VIEW

NOTES:
- GENERIC DRAWING FOR REFERENCE ONLY
- SHOP DRAWING AVAILABLE ON REQUEST

This drawing is the exclusive property of Granby Composites Inc. No part of this drawing may be used or reproduced in any manner without its written permission.										2019
TOLERANCES (LINEAR) FEET DIM. -> ± 1% 0.0 -> ± 0.5"0.00 -> ± 0.25" 0.000 -> ± 0.125"					 GRANBY COMPOSITES			Revision description		
								Format	Part no.	REV
TOLERANCES (ANGULAR) 0 -> ± 2 DEG. 0.0 -> ± 0.5 DEG.0.00 -> ± 0.1 DEG.					Drawn by O. Marin			19/01/2024		
Weight : 7628 Lb					Approved by :			Title		
Client					# Projet			Sheet 3 / 4		
								10' Dia. TANK - 24921 US gal		

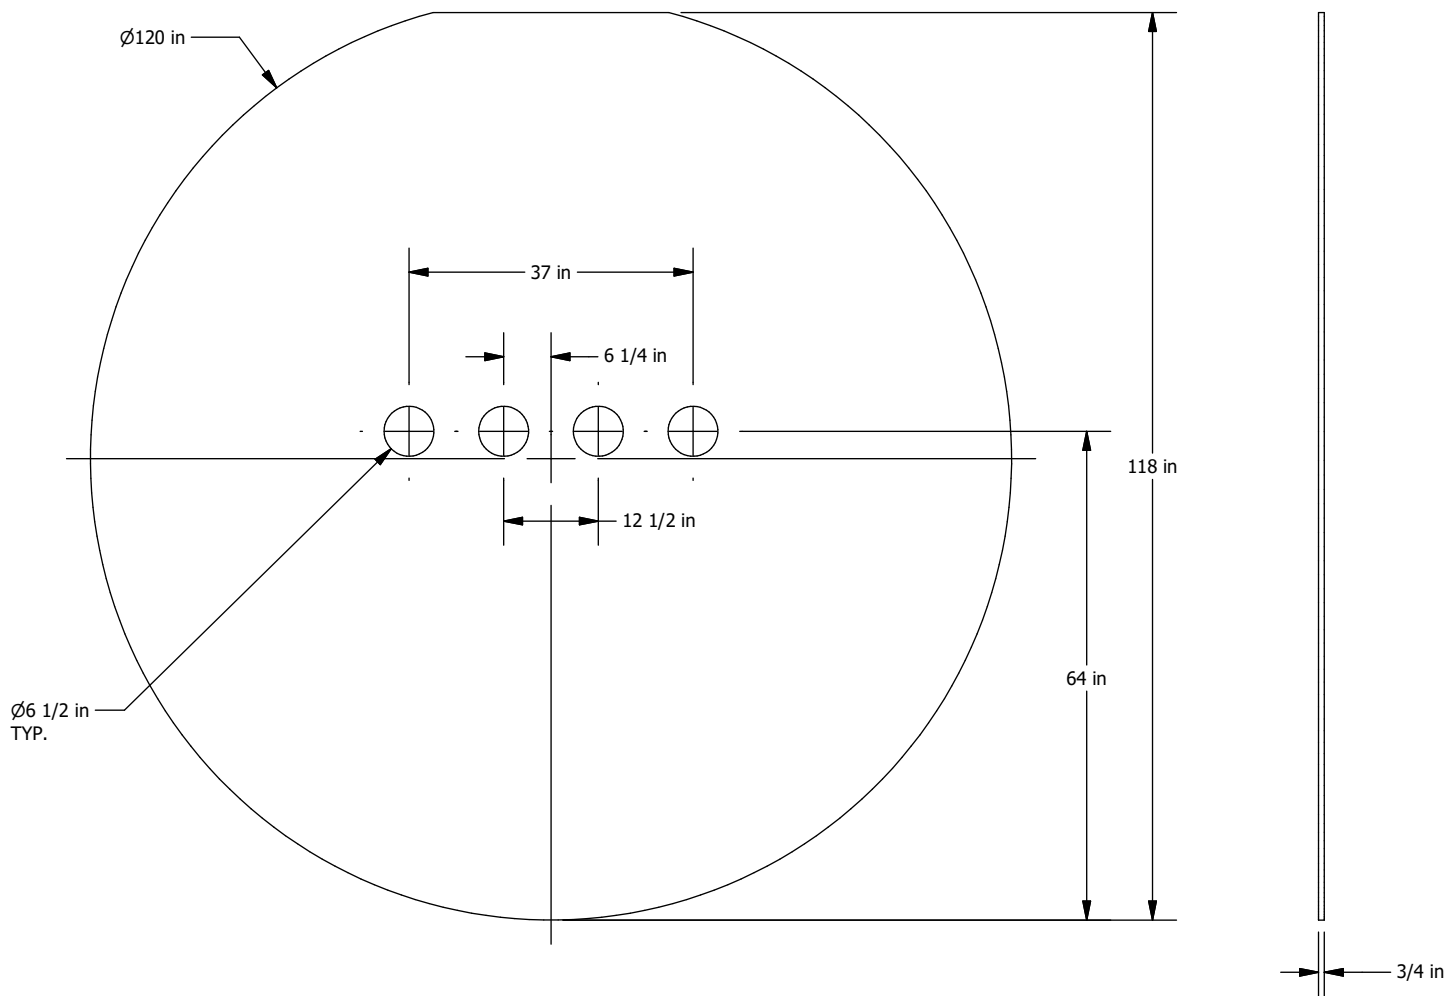


ITEM : MUR10

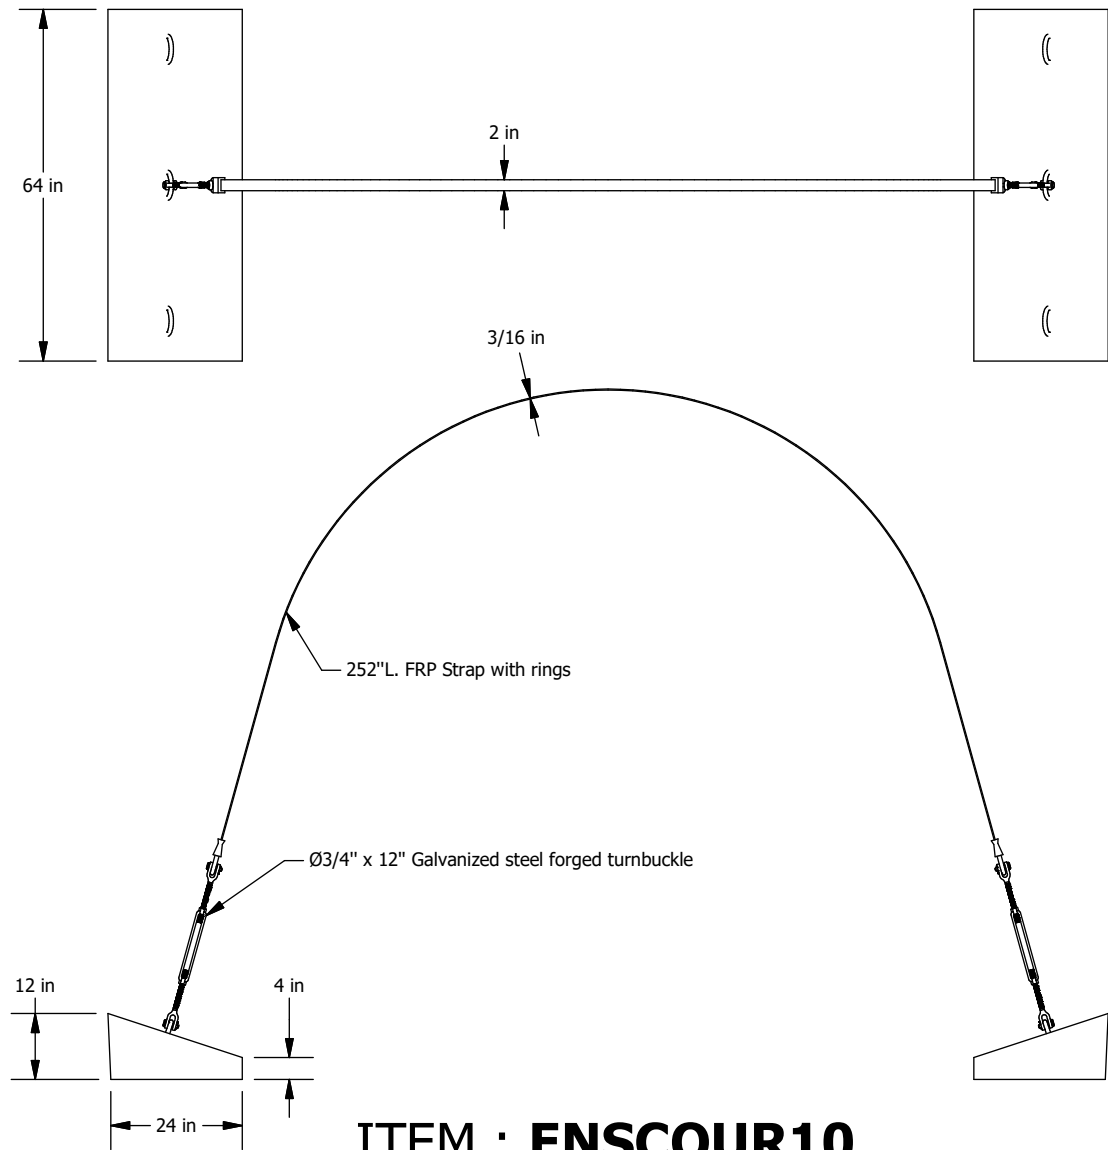

ITEM : ENSCOUR10

- Turnbuckle**
- Forged carbon steel, hot-dip galvanized
 - In accordance with US specifications FF-T-791B Type 1, Form 1 (open cage).
 - Safety factor 5:1
 - Working load 5,200 Lbs
- Concrete deadman anchor**
- Weight : 1,093 Lbs
 - Reinforced with galvanized steel
- Fiberglass strap**
- High quality fiberglass
 - Working load 20,000 Lbs
 - Ultimate rated 45,000 Lbs
 - Equipped with galvanized steel rings



Fiberglass Strap Guide
Directly installed on the tank

This drawing is the exclusive property of Granby Composites Inc. No part of this drawing may be used or reproduced in any manner without its written permission.					2019
TOLERANCES (LINEAR) FEET DIM. -> ± 1% 0.0 -> ± 0.5" 0.00 -> ± 0.25" 0.000 -> ± 0.125"		 GRANBY COMPOSITES		Revision description	
				Format B	Part no. MUR10
TOLERANCES (ANGULAR) 0 -> ± 2 DEG. 0.0 -> ± 0.5 DEG. 0.00 -> ± 0.1 DEG.		Drawn by O. Marin		11/05/2021	
Weight :		Approved by :		Title	
Client		# Projet		Sheet 4 / 4	
				10' DIA. - WALL	
				REV 01	



CAPACITY CHART FOR NN10260942 TANK

Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)
-		6	422	12	1203	18	2214	24	3398	30	4719	36	6146	42	7656	48	9225	54	10833	60	12461
1/8	2	6 1/8	435	12 1/8	1222	18 1/8	2237	24 1/8	3425	30 1/8	4748	36 1/8	6177	42 1/8	7688	48 1/8	9258	54 1/8	10867	60 1/8	12495
1/4	4	6 1/4	448	12 1/4	1241	18 1/4	2260	24 1/4	3451	30 1/4	4776	36 1/4	6208	42 1/4	7720	48 1/4	9291	54 1/4	10901	60 1/4	12529
3/8	7	6 3/8	462	12 3/8	1260	18 3/8	2283	24 3/8	3477	30 3/8	4805	36 3/8	6238	42 3/8	7752	48 3/8	9324	54 3/8	10934	60 3/8	12563
1/2	10	6 1/2	476	12 1/2	1280	18 1/2	2307	24 1/2	3504	30 1/2	4834	36 1/2	6269	42 1/2	7784	48 1/2	9358	54 1/2	10968	60 1/2	12597
5/8	14	6 5/8	490	12 5/8	1299	18 5/8	2330	24 5/8	3530	30 5/8	4863	36 5/8	6300	42 5/8	7817	48 5/8	9391	54 5/8	11002	60 5/8	12631
3/4	19	6 3/4	504	12 3/4	1319	18 3/4	2353	24 3/4	3557	30 3/4	4892	36 3/4	6331	42 3/4	7849	48 3/4	9424	54 3/4	11036	60 3/4	12665
7/8	23	6 7/8	518	12 7/8	1338	18 7/8	2377	24 7/8	3583	30 7/8	4921	36 7/8	6362	42 7/8	7881	48 7/8	9457	54 7/8	11070	60 7/8	12699
1	28	7	532	13	1358	19	2401	25	3610	31	4950	37	6393	43	7913	49	9491	55	11104	61	12733
1 1/8	34	7 1/8	547	13 1/8	1377	19 1/8	2424	25 1/8	3637	31 1/8	4979	37 1/8	6424	43 1/8	7946	49 1/8	9524	55 1/8	11137	61 1/8	12767
1 1/4	40	7 1/4	561	13 1/4	1397	19 1/4	2448	25 1/4	3663	31 1/4	5008	37 1/4	6455	43 1/4	7978	49 1/4	9557	55 1/4	11171	61 1/4	12801
1 3/8	46	7 3/8	576	13 3/8	1417	19 3/8	2472	25 3/8	3690	31 3/8	5037	37 3/8	6486	43 3/8	8011	49 3/8	9591	55 3/8	11205	61 3/8	12835
1 1/2	52	7 1/2	591	13 1/2	1437	19 1/2	2496	25 1/2	3717	31 1/2	5067	37 1/2	6517	43 1/2	8043	49 1/2	9624	55 1/2	11239	61 1/2	12868
1 5/8	59	7 5/8	606	13 5/8	1457	19 5/8	2519	25 5/8	3744	31 5/8	5096	37 5/8	6548	43 5/8	8076	49 5/8	9657	55 5/8	11273	61 5/8	12902
1 3/4	65	7 3/4	621	13 3/4	1477	19 3/4	2543	25 3/4	3771	31 3/4	5125	37 3/4	6579	43 3/4	8108	49 3/4	9691	55 3/4	11307	61 3/4	12936
1 7/8	73	7 7/8	636	13 7/8	1498	19 7/8	2567	25 7/8	3798	31 7/8	5155	37 7/8	6610	43 7/8	8140	49 7/8	9724	55 7/8	11341	61 7/8	12970
2	80	8	652	14	1518	20	2592	26	3825	32	5184	38	6641	44	8173	50	9758	56	11374	62	13004
2 1/8	88	8 1/8	667	14 1/8	1539	20 1/8	2616	26 1/8	3852	32 1/8	5213	38 1/8	6673	44 1/8	8206	50 1/8	9791	56 1/8	11408	62 1/8	13038
2 1/4	96	8 1/4	683	14 1/4	1559	20 1/4	2640	26 1/4	3879	32 1/4	5243	38 1/4	6704	44 1/4	8238	50 1/4	9824	56 1/4	11442	62 1/4	13072
2 3/8	104	8 3/8	699	14 3/8	1580	20 3/8	2664	26 3/8	3906	32 3/8	5272	38 3/8	6735	44 3/8	8271	50 3/8	9858	56 3/8	11476	62 3/8	13106
2 1/2	112	8 1/2	714	14 1/2	1600	20 1/2	2689	26 1/2	3934	32 1/2	5302	38 1/2	6766	44 1/2	8303	50 1/2	9891	56 1/2	11510	62 1/2	13140
2 5/8	121	8 5/8	730	14 5/8	1621	20 5/8	2713	26 5/8	3961	32 5/8	5332	38 5/8	6798	44 5/8	8336	50 5/8	9925	56 5/8	11544	62 5/8	13174
2 3/4	129	8 3/4	746	14 3/4	1642	20 3/4	2738	26 3/4	3989	32 3/4	5361	38 3/4	6829	44 3/4	8369	50 3/4	9958	56 3/4	11578	62 3/4	13208
2 7/8	138	8 7/8	763	14 7/8	1663	20 7/8	2762	26 7/8	4016	32 7/8	5391	38 7/8	6861	44 7/8	8401	50 7/8	9992	56 7/8	11612	62 7/8	13242
3	148	9	779	15	1684	21	2787	27	4043	33	5421	39	6892	45	8434	51	10025	57	11646	63	13276
3 1/8	157	9 1/8	795	15 1/8	1705	21 1/8	2812	27 1/8	4071	33 1/8	5450	39 1/8	6923	45 1/8	8467	51 1/8	10059	57 1/8	11680	63 1/8	13310
3 1/4	167	9 1/4	812	15 1/4	1727	21 1/4	2837	27 1/4	4099	33 1/4	5480	39 1/4	6955	45 1/4	8499	51 1/4	10092	57 1/4	11714	63 1/4	13344
3 3/8	176	9 3/8	829	15 3/8	1748	21 3/8	2862	27 3/8	4126	33 3/8	5510	39 3/8	6987	45 3/8	8532	51 3/8	10126	57 3/8	11748	63 3/8	13378
3 1/2	186	9 1/2	845	15 1/2	1769	21 1/2	2886	27 1/2	4154	33 1/2	5540	39 1/2	7018	45 1/2	8565	51 1/2	10159	57 1/2	11781	63 1/2	13412
3 5/8	197	9 5/8	862	15 5/8	1791	21 5/8	2911	27 5/8	4182	33 5/8	5570	39 5/8	7050	45 5/8	8598	51 5/8	10193	57 5/8	11815	63 5/8	13445
3 3/4	207	9 3/4	879	15 3/4	1812	21 3/4	2937	27 3/4	4210	33 3/4	5600	39 3/4	7081	45 3/4	8631	51 3/4	10227	57 3/4	11849	63 3/4	13479
3 7/8	217	9 7/8	896	15 7/8	1834	21 7/8	2962	27 7/8	4237	33 7/8	5630	39 7/8	7113	45 7/8	8663	51 7/8	10260	57 7/8	11883	63 7/8	13513
4	228	10	914	16	1856	22	2987	28	4265	34	5660	40	7145	46	8696	52	10294	58	11917	64	13547
4 1/8	239	10 1/8	931	16 1/8	1877	22 1/8	3012	28 1/8	4293	34 1/8	5690	40 1/8	7176	46 1/8	8729	52 1/8	10327	58 1/8	11951	64 1/8	13581
4 1/4	250	10 1/4	948	16 1/4	1899	22 1/4	3037	28 1/4	4321	34 1/4	5720	40 1/4	7208	46 1/4	8762	52 1/4	10361	58 1/4	11985	64 1/4	13615
4 3/8	261	10 3/8	966	16 3/8	1921	22 3/8	3063	28 3/8	4349	34 3/8	5750	40 3/8	7240	46 3/8	8795	52 3/8	10395	58 3/8	12019	64 3/8	13649
4 1/2	273	10 1/2	984	16 1/2	1943	22 1/2	3088	28 1/2	4378	34 1/2	5781	40 1/2	7272	46 1/2	8828	52 1/2	10428	58 1/2	12053	64 1/2	13683
4 5/8	284	10 5/8	1001	16 5/8	1966	22 5/8	3114	28 5/8	4406	34 5/8	5811	40 5/8	7304	46 5/8	8861	52 5/8	10462	58 5/8	12087	64 5/8	13716
4 3/4	296	10 3/4	1019	16 3/4	1988	22 3/4	3139	28 3/4	4434	34 3/4	5841	40 3/4	7335	46 3/4	8894	52 3/4	10496	58 3/4	12121	64 3/4	13750
4 7/8	308	10 7/8	1037	16 7/8	2010	22 7/8	3165	28 7/8	4462	34 7/8	5872	40 7/8	7367	46 7/8	8927	52 7/8	10529	58 7/8	12155	64 7/8	13784
5	320	11	1055	17	2032	23	3191	29	4491	35	5902	41	7399	47	8960	53	10563	59	12189	65	13818
5 1/8	332	11 1/8	1073	17 1/8	2055	23 1/8	3216	29 1/8	4519	35 1/8	5932	41 1/8	7431	47 1/8	8993	53 1/8	10597	59 1/8	12223	65 1/8	13852
5 1/4	344	11 1/4	1092	17 1/4	2077	23 1/4	3242	29 1/4	4547	35 1/4	5963	41 1/4	7463	47 1/4	9026	53 1/4	10631	59 1/4	12257	65 1/4	13886
5 3/8	357	11 3/8	1110	17 3/8	2100	23 3/8	3268	29 3/8	4576	35 3/8	5993	41 3/8	7495	47 3/8	9059	53 3/8	10664	59 3/8	12291	65 3/8	13919
5 1/2	369	11 1/2	1128	17 1/2	2123	23 1/2	3294	29 1/2	4604	35 1/2	6024	41 1/2	7527	47 1/2	9092	53 1/2	10698	59 1/2	12325	65 1/2	13953
5 5/8	382	11 5/8	1147	17 5/8	2145	23 5/8	3320	29 5/8	4633	35 5/8	6054	41 5/8	7559	47 5/8	9125	53 5/8	10732	59 5/8	12359	65 5/8	13987
5 3/4	395	11 3/4	1166	17 3/4	2168	23 3/4	3346	29 3/4	4661	35 3/4	6085	41 3/4	7591	47 3/4	9158	53 3/4	10766	59 3/4	12393	65 3/4	14021
5 7/8	408	11 7/8	1184	17 7/8	2191	23 7/8	3372	29 7/8	4690	35 7/8	6115	41 7/8	7623	47 7/8	9192	53 7/8	10799	59 7/8	12427	65 7/8	14055

** PRECISION IS ABOUT +/- 1%



CAPACITY CHART FOR NN10260942 TANK

Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)
66	14088	71	15431	76	16749	81	18030	86	19262	91	20431	96	21523	101	22521	106	23403	111	24143	116	24693
66 1/8	14122	71 1/8	15464	76 1/8	16781	81 1/8	18061	86 1/8	19292	91 1/8	20459	96 1/8	21549	101 1/8	22545	106 1/8	23424	111 1/8	24159	116 1/8	24704
66 1/4	14156	71 1/4	15498	76 1/4	16814	81 1/4	18092	86 1/4	19322	91 1/4	20488	96 1/4	21576	101 1/4	22568	106 1/4	23444	111 1/4	24175	116 1/4	24715
66 3/8	14190	71 3/8	15531	76 3/8	16846	81 3/8	18124	86 3/8	19352	91 3/8	20516	96 3/8	21602	101 3/8	22592	106 3/8	23464	111 3/8	24191	116 3/8	24725
66 1/2	14224	71 1/2	15564	76 1/2	16879	81 1/2	18155	86 1/2	19382	91 1/2	20544	96 1/2	21628	101 1/2	22615	106 1/2	23484	111 1/2	24207	116 1/2	24735
66 5/8	14257	71 5/8	15597	76 5/8	16911	81 5/8	18187	86 5/8	19411	91 5/8	20572	96 5/8	21654	101 5/8	22638	106 5/8	23504	111 5/8	24223	116 5/8	24745
66 3/4	14291	71 3/4	15630	76 3/4	16943	81 3/4	18218	86 3/4	19441	91 3/4	20600	96 3/4	21679	101 3/4	22661	106 3/4	23524	111 3/4	24239	116 3/4	24755
66 7/8	14325	71 7/8	15664	76 7/8	16976	81 7/8	18249	86 7/8	19471	91 7/8	20628	96 7/8	21705	101 7/8	22684	106 7/8	23544	111 7/8	24254	116 7/8	24765
67	14358	72	15697	77	17008	82	18280	87	19501	92	20656	97	21731	102	22708	107	23564	112	24270	117	24774
67 1/8	14392	72 1/8	15730	77 1/8	17040	82 1/8	18312	87 1/8	19531	92 1/8	20684	97 1/8	21757	102 1/8	22730	107 1/8	23584	112 1/8	24285	117 1/8	24783
67 1/4	14426	72 1/4	15763	77 1/4	17073	82 1/4	18343	87 1/4	19560	92 1/4	20712	97 1/4	21782	102 1/4	22753	107 1/4	23603	112 1/4	24300	117 1/4	24792
67 3/8	14459	72 3/8	15796	77 3/8	17105	82 3/8	18374	87 3/8	19590	92 3/8	20740	97 3/8	21808	102 3/8	22776	107 3/8	23622	112 3/8	24316	117 3/8	24801
67 1/2	14493	72 1/2	15829	77 1/2	17137	82 1/2	18405	87 1/2	19620	92 1/2	20768	97 1/2	21833	102 1/2	22799	107 1/2	23642	112 1/2	24331	117 1/2	24810
67 5/8	14527	72 5/8	15862	77 5/8	17170	82 5/8	18436	87 5/8	19649	92 5/8	20795	97 5/8	21859	102 5/8	22822	107 5/8	23661	112 5/8	24345	117 5/8	24818
67 3/4	14560	72 3/4	15896	77 3/4	17202	82 3/4	18467	87 3/4	19679	92 3/4	20823	97 3/4	21884	102 3/4	22844	107 3/4	23680	112 3/4	24360	117 3/4	24826
67 7/8	14594	72 7/8	15929	77 7/8	17234	82 7/8	18498	87 7/8	19708	92 7/8	20851	97 7/8	21910	102 7/8	22867	107 7/8	23699	112 7/8	24375	117 7/8	24834
68	14628	73	15962	78	17266	83	18529	88	19738	93	20878	98	21935	103	22889	108	23718	113	24389	118	24842
68 1/8	14661	73 1/8	15995	78 1/8	17298	83 1/8	18560	88 1/8	19767	93 1/8	20906	98 1/8	21960	103 1/8	22912	108 1/8	23737	113 1/8	24404	118 1/8	24849
68 1/4	14695	73 1/4	16028	78 1/4	17330	83 1/4	18591	88 1/4	19796	93 1/4	20933	98 1/4	21985	103 1/4	22934	108 1/4	23756	113 1/4	24418	118 1/4	24856
68 3/8	14729	73 3/8	16061	78 3/8	17362	83 3/8	18622	88 3/8	19826	93 3/8	20960	98 3/8	22010	103 3/8	22956	108 3/8	23775	113 3/8	24432	118 3/8	24863
68 1/2	14762	73 1/2	16094	78 1/2	17394	83 1/2	18652	88 1/2	19855	93 1/2	20988	98 1/2	22035	103 1/2	22978	108 1/2	23793	113 1/2	24446	118 1/2	24870
68 5/8	14796	73 5/8	16127	78 5/8	17426	83 5/8	18683	88 5/8	19884	93 5/8	21015	98 5/8	22060	103 5/8	23000	108 5/8	23812	113 5/8	24460	118 5/8	24876
68 3/4	14829	73 3/4	16159	78 3/4	17458	83 3/4	18714	88 3/4	19913	93 3/4	21042	98 3/4	22085	103 3/4	23022	108 3/4	23830	113 3/4	24473	118 3/4	24882
68 7/8	14863	73 7/8	16192	78 7/8	17490	83 7/8	18745	88 7/8	19943	93 7/8	21070	98 7/8	22110	103 7/8	23044	108 7/8	23848	113 7/8	24487	118 7/8	24888
69	14896	74	16225	79	17522	84	18775	89	19972	94	21097	99	22134	104	23066	109	23866	114	24500	119	24893
69 1/8	14930	74 1/8	16258	79 1/8	17554	84 1/8	18806	89 1/8	20001	94 1/8	21124	99 1/8	22159	104 1/8	23088	109 1/8	23885	114 1/8	24513	119 1/8	24898
69 1/4	14963	74 1/4	16291	79 1/4	17586	84 1/4	18837	89 1/4	20030	94 1/4	21151	99 1/4	22184	104 1/4	23109	109 1/4	23902	114 1/4	24526	119 1/4	24903
69 3/8	14997	74 3/8	16324	79 3/8	17618	84 3/8	18867	89 3/8	20059	94 3/8	21178	99 3/8	22208	104 3/8	23131	109 3/8	23920	114 3/8	24539	119 3/8	24907
69 1/2	15030	74 1/2	16357	79 1/2	17650	84 1/2	18898	89 1/2	20088	94 1/2	21205	99 1/2	22233	104 1/2	23152	109 1/2	23938	114 1/2	24552	119 1/2	24911
69 5/8	15064	74 5/8	16389	79 5/8	17682	84 5/8	18928	89 5/8	20116	94 5/8	21232	99 5/8	22257	104 5/8	23174	109 5/8	23956	114 5/8	24565	119 5/8	24915
69 3/4	15097	74 3/4	16422	79 3/4	17713	84 3/4	18959	89 3/4	20145	94 3/4	21258	99 3/4	22281	104 3/4	23195	109 3/4	23973	114 3/4	24577	119 3/4	24918
69 7/8	15131	74 7/8	16455	79 7/8	17745	84 7/8	18989	89 7/8	20174	94 7/8	21285	99 7/8	22306	104 7/8	23216	109 7/8	23991	114 7/8	24590	119 7/8	24920
70	15164	75	16488	80	17777	85	19020	90	20203	95	21312	100	22330	105	23237	110	24008	115	24602		
70 1/8	15197	75 1/8	16520	80 1/8	17809	85 1/8	19050	90 1/8	20232	95 1/8	21338	100 1/8	22354	105 1/8	23258	110 1/8	24025	115 1/8	24614		
70 1/4	15231	75 1/4	16553	80 1/4	17840	85 1/4	19080	90 1/4	20260	95 1/4	21365	100 1/4	22378	105 1/4	23279	110 1/4	24042	115 1/4	24626		
70 3/8	15264	75 3/8	16586	80 3/8	17872	85 3/8	19111	90 3/8	20289	95 3/8	21392	100 3/8	22402	105 3/8	23300	110 3/8	24059	115 3/8	24637		
70 1/2	15298	75 1/2	16618	80 1/2	17903	85 1/2	19141	90 1/2	20317	95 1/2	21418	100 1/2	22426	105 1/2	23321	110 1/2	24076	115 1/2	24649		
70 5/8	15331	75 5/8	16651	80 5/8	17935	85 5/8	19171	90 5/8	20346	95 5/8	21444	100 5/8	22450	105 5/8	23342	110 5/8	24093	115 5/8	24660		
70 3/4	15364	75 3/4	16683	80 3/4	17967	85 3/4	19201	90 3/4	20374	95 3/4	21471	100 3/4	22474	105 3/4	23362	110 3/4	24110	115 3/4	24672		
70 7/8	15398	75 7/8	16716	80 7/8	17998	85 7/8	19231	90 7/8	20403	95 7/8	21497	100 7/8	22497	105 7/8	23383	110 7/8	24126	115 7/8	24683		

** PRECISION IS ABOUT +/- 1%