


NN10351233EP

FIBERGLASS TANK

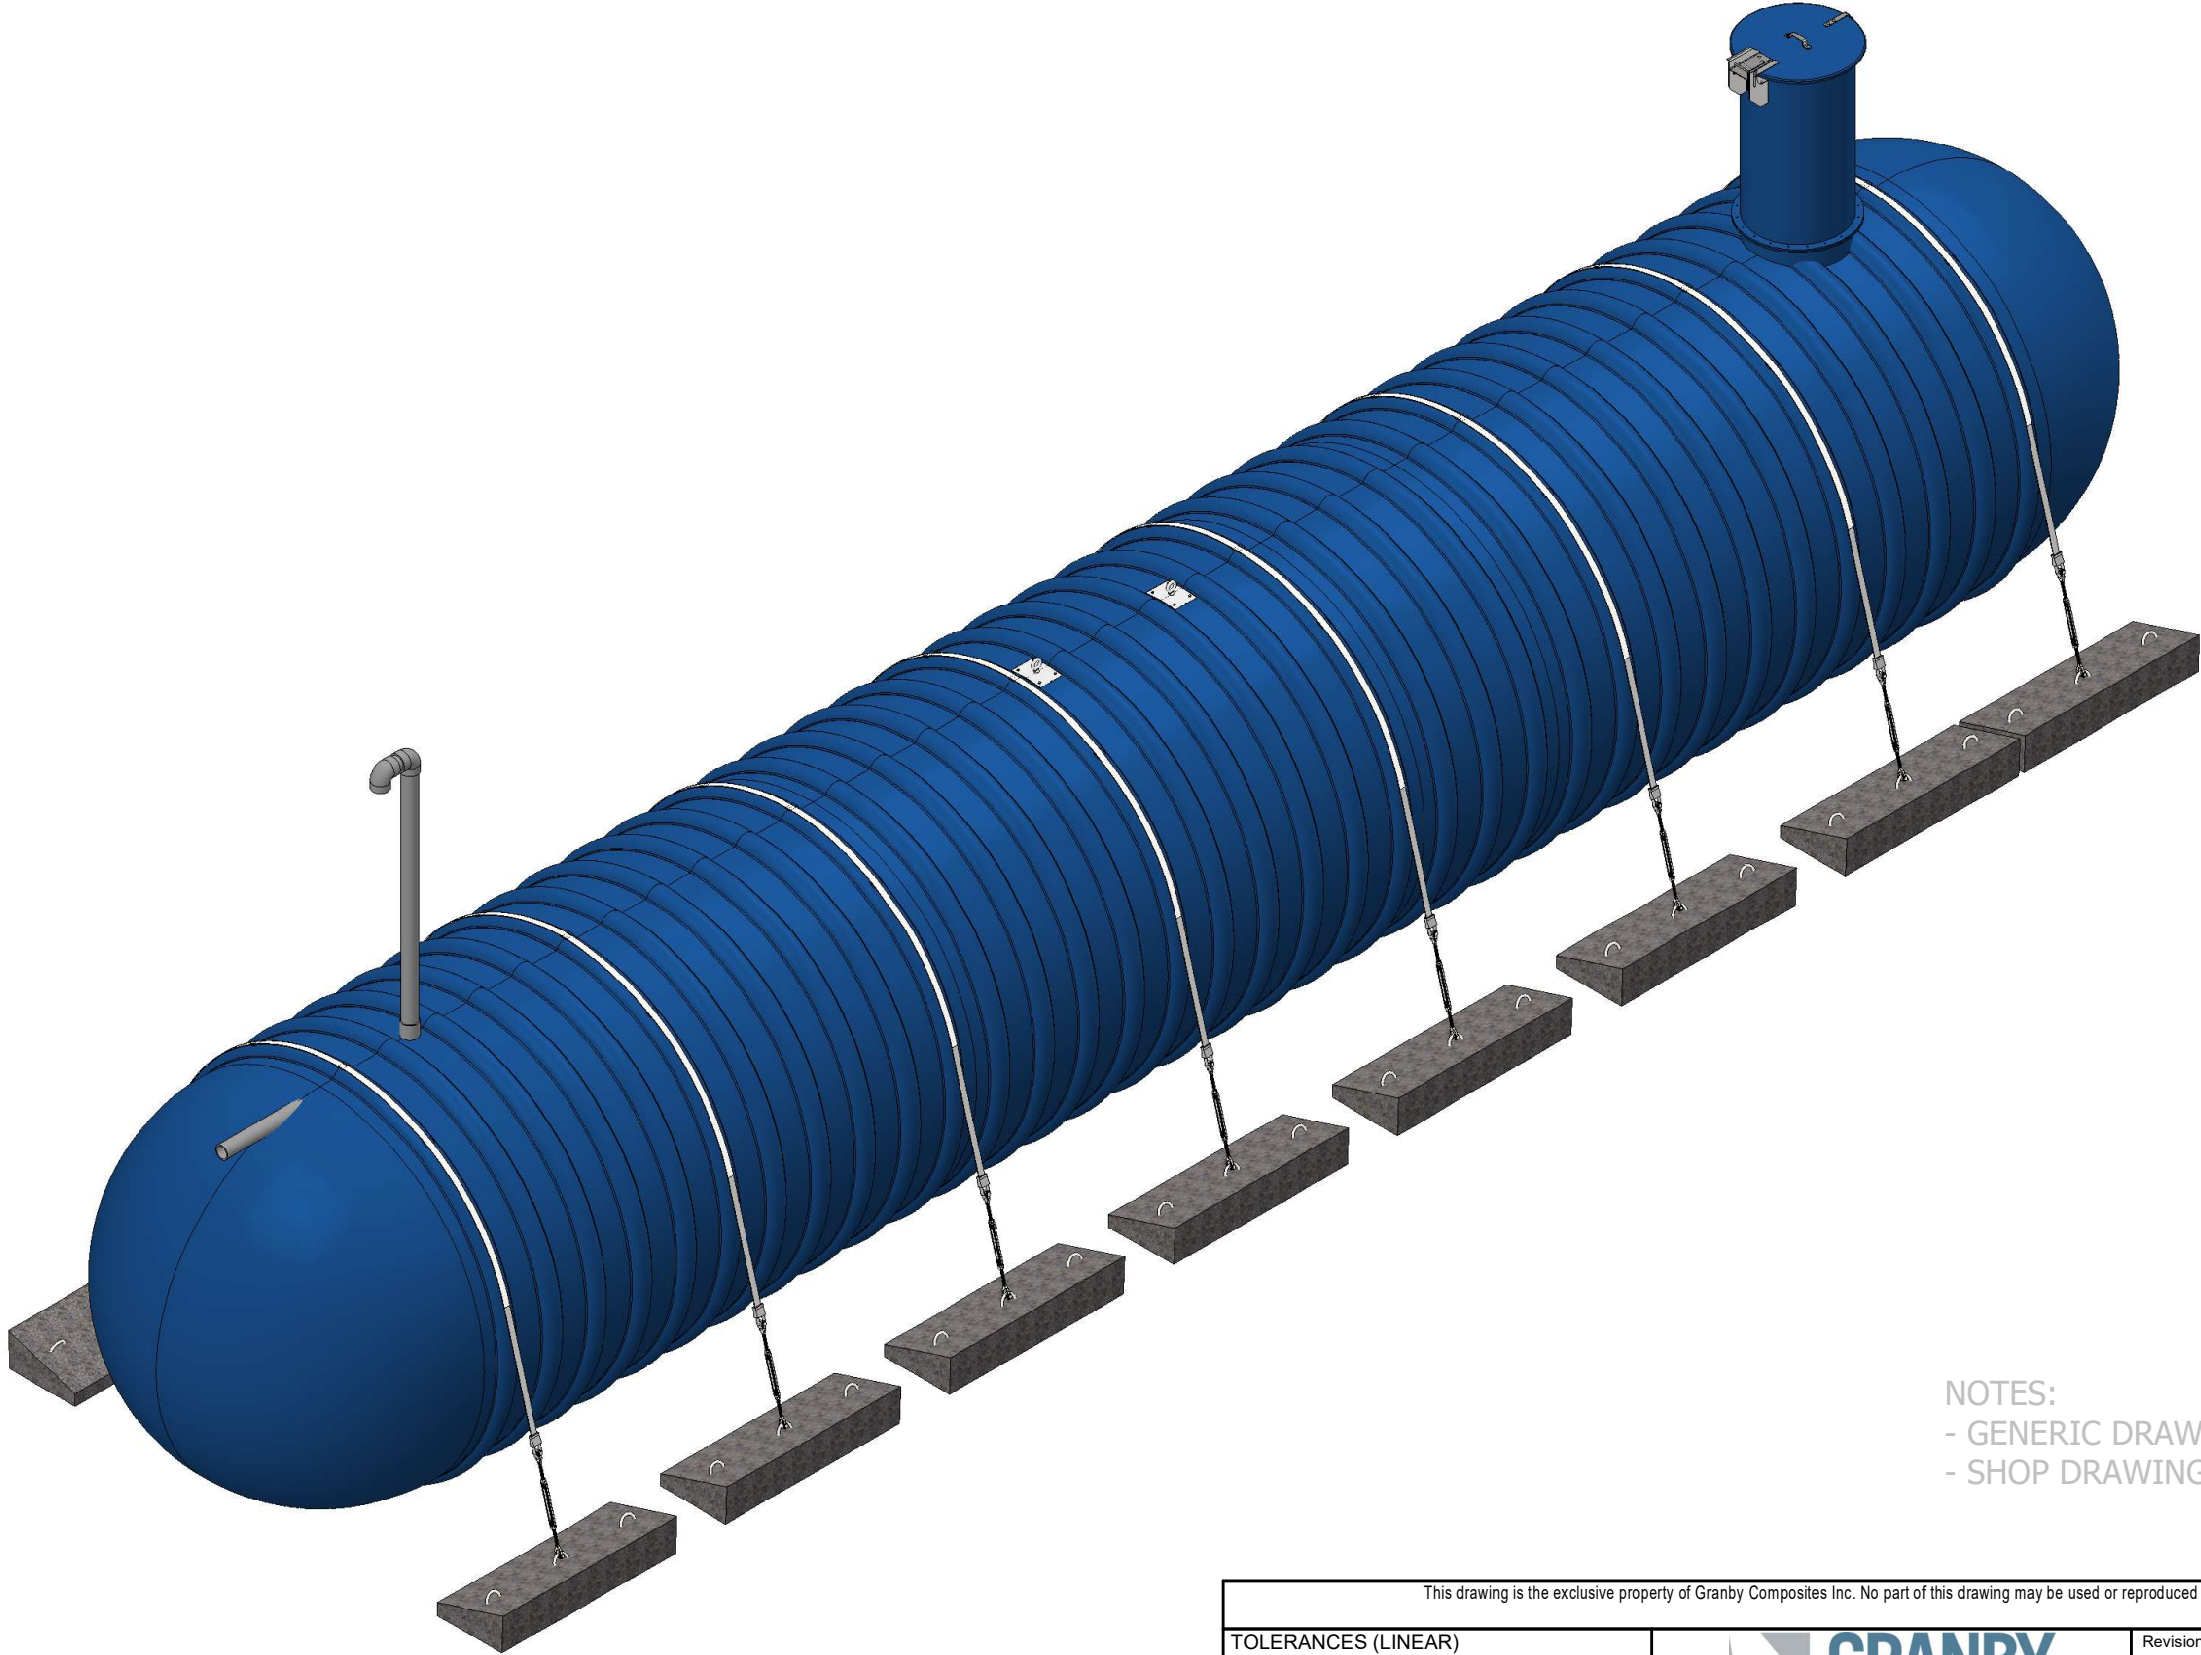

NOTES:
 - GENERIC DRAWING FOR REFERENCE ONLY
 - SHOP DRAWING AVAILABLE ON REQUEST



This drawing is the exclusive property of Granby Composites Inc. No part of this drawing may be used or reproduced in any manner without its written permission.

2019

TOLERANCES (LINEAR)		 GRANBY COMPOSITES	Revision description	
FEET DIM. -> ± 1% 0.0 -> ± 0.5"			Format	Part no.
0.00 -> ± 0.25" 0.000 -> ± 0.125"			B	NN10351233EP
TOLERANCES (ANGULAR)			REV	02.
0 -> ± 2 DEG. 0.0 -> ± 0.5 DEG.		Drawn by O. Marin	19/12/2023	Title 10' Dia. TANK - 32192 US gal
0.00 -> ± 0.1 DEG.		Approved by :		
Weight : 8558 Lb				
Client	# Project	Sheet	1 / 4	

Item	Part Number	Qty	Description	Check List
1	ADF0000001	1	FOAM 28-3/4" DIA. x 8" / R-35	
2	ADP0000001	2	LIFTING LUG	
3	ENSCOUR10	8	ANCHORING KIT	
4	EV480	1	4" SCH. 80 VENT KIT WITH SST BIRD SCREEN	
5	GMHE30-COVER01	1	30" DIA. FRP. - LOCKABLE MAN HOLE COVER WITH HINGE	
6	MH-30 (6"L.)	1	30" DIA. x 6" L. - MANHOLE	
7	MHE-30 (54"L.)	1	30" DIA. x 54" L. - MANHOLE EXTENSION	
8	PFV01414	1	0.5" x 13.5" x 13.5" ANTI-VORTEX PLATE	
9	TP80400G01 (4.25"L.)	1	4" SCH.80 GREY PVC PIPE	
10	TP80400G01 (42"L.)	2	4" SCH.80 GREY PVC PIPE	

BACKFILL PROPERTIES
N1 - 1/8" TO 3/4" PEA GRAVEL OR 1/2" CRUSHED STONE
N2 - PRIMARY BACKFILL, 1/8" TO 3/4" PEA GRAVEL OR 1/2" CRUSHED STONE
N3 - SECONDARY BACKFILL, COARSE SAND OR GRAVEL 1 1/2" OR LESS

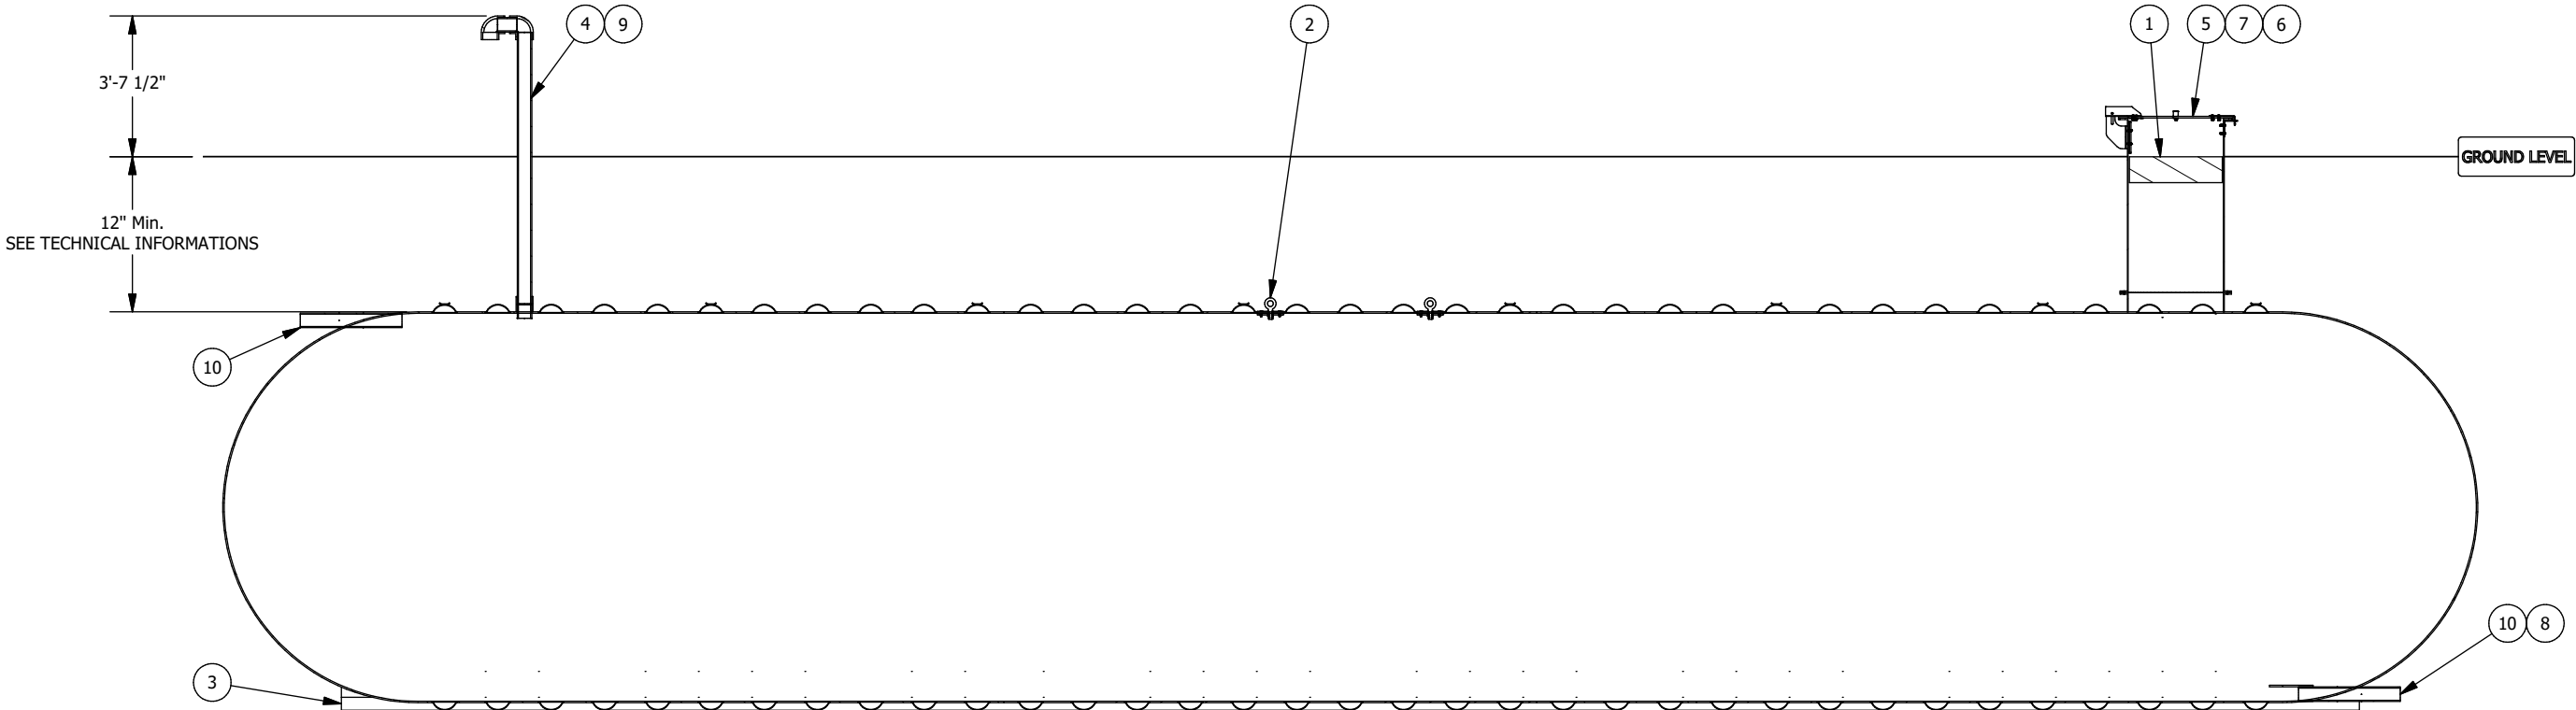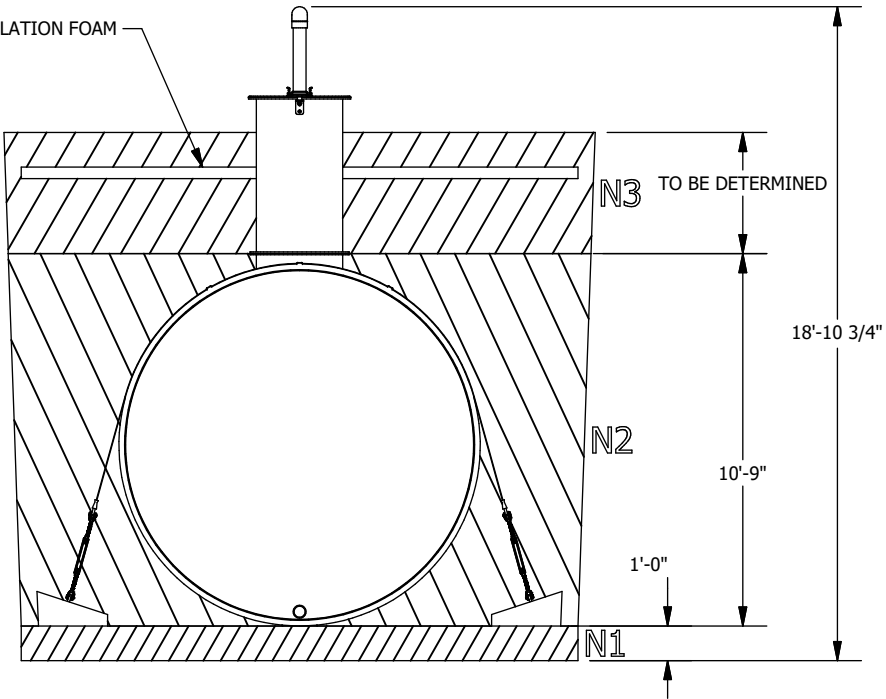

Optional anchoring depending on the tank's environment

Technical informations


- Burrial depth: According to the geotechnical installation conditions
- Inside Diameter : 120"
- (If required) Quantity of fiberglass anchoring straps : 8
- (If required) Quantity of reinforced concrete deadman anchors : 16
- Simultaneous lifting by 2 lugs. The angle of the (chains or belts, etc.) must not be less than 60° from the horizontal
- The weight on the drawing does not include kits of belts and concrete blocks.
- HS-20 rated for burial depth from 36 to 84 inches
- Manufactured according to ANSI-AWWA D120 requirements
- Manufactured according to NSF-61 requirements for drinking water
- Airtightness test performed at the factory at 35 kPa

The tank must be installed in accordance with the manufacturer's instructions.

SECTION ELEVATION VIEW

NOTES:
- GENERIC DRAWING FOR REFERENCE ONLY
- SHOP DRAWING AVAILABLE ON REQUEST


This drawing is the exclusive property of Granby Composites Inc. No part of this drawing may be used or reproduced in any manner without its written permission.				2019
TOLERANCES (LINEAR) FEET DIM. -> ± 1% 0.0 -> ± 0.5"		GRANBY COMPOSITES		Revision description
TOLERANCES (ANGULAR) 0 -> ± 2 DEG. 0.0 -> ± 0.5 DEG.		Drawn by O. Marin	19/12/2023	Format B Part no. NN10351233EP REV 02.
Weight : 8558 Lb		Approved by :		Title
Client	# Projet	Sheet 2 / 4		10' Dia. TANK - 32192 US gal

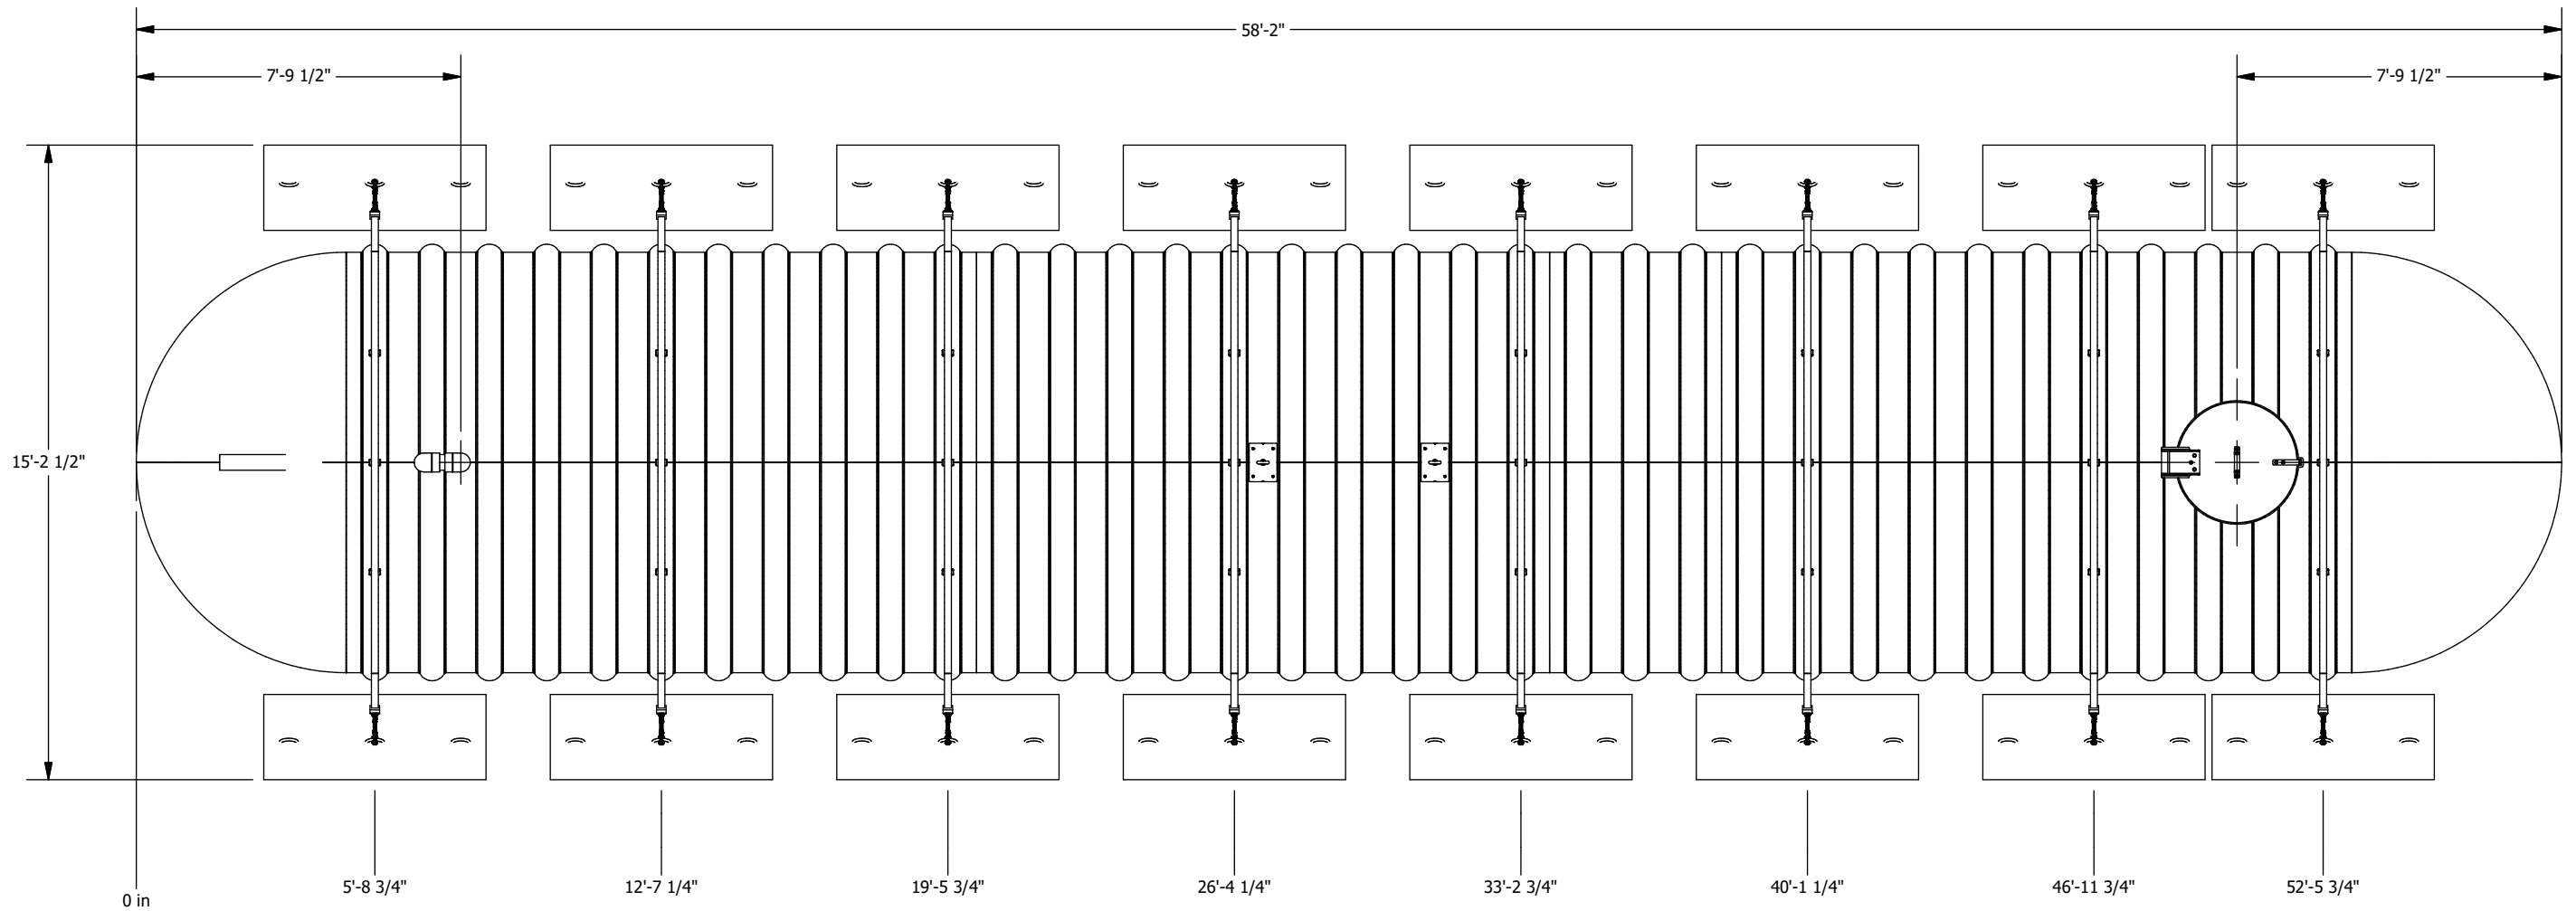

PLAN VIEW

NOTES:
- GENERIC DRAWING FOR REFERENCE ONLY
- SHOP DRAWING AVAILABLE ON REQUEST

This drawing is the exclusive property of Granby Composites Inc. No part of this drawing may be used or reproduced in any manner without its written permission.										2019
TOLERANCES (LINEAR) FEET DIM. -> ± 1% 0.0 -> ± 0.5" 0.00 -> ± 0.25" 0.000 -> ± 0.125"			GRANBY COMPOSITES Drawn by O. Marin Approved by :			Revision description				
						Format B	Part no. NN10351233EP		REV 02.	
TOLERANCES (ANGULAR) 0 -> ± 2 DEG. 0.0 -> ± 0.5 DEG. 0.00 -> ± 0.1 DEG.			19/12/2023			Title 10' Dia. TANK - 32192 US gal				
Weight : 8558 Lb										
Client		# Project			Sheet 3 / 4					

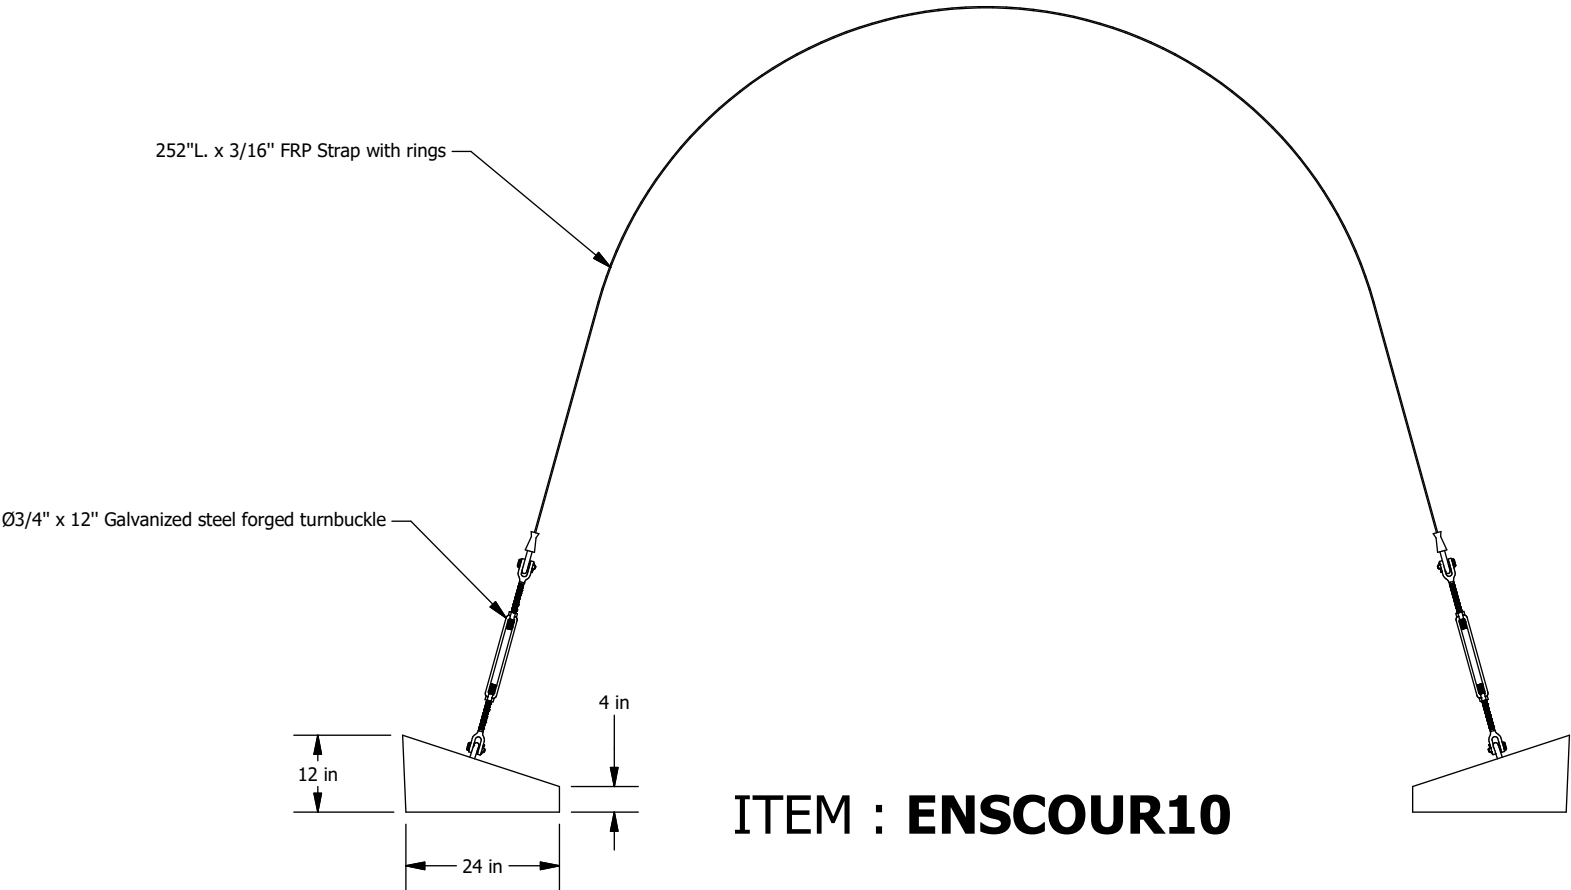

ITEM : ENSCOUR10



Fiberglass Strap Guide
Directly installed on the tank

- Turnbuckle**
- Forged carbon steel, hot-dip galvanized
 - In accordance with US specifications FF-T-791B Type 1, Form 1 (open cage).
 - Safety factor 5:1
 - Working load 5,200 Lbs
- Concrete deadman anchor**
- Weight : 1,093 Lbs
 - Reinforced with galvanized steel
- Fiberglass strap**
- High quality fiberglass
 - Working load 20,000 Lbs
 - Ultimate rated 45,000 Lbs
 - Equipped with galvanized steel rings

This drawing is the exclusive property of Granby Composites Inc. No part of this drawing may be used or reproduced in any manner without its written permission.					2019
TOLERANCES (LINEAR) FEET DIM. -> ± 1% 0.0 -> ± 0.5" 0.00 -> ± 0.25" 0.000 -> ± 0.125"			Revision description		
			Format B	Part no. ENSCOUR10	REV A.
TOLERANCES (ANGULAR) 0 -> ± 2 DEG. 0.0 -> ± 0.5 DEG. 0.00 -> ± 0.1 DEG.		Drawn by O. Marin	04/10/2018		
Weight :		Approved by :	Title		
			ANCHORING KIT		
Client	# Projet	Sheet	4 / 4		



CAPACITY CHART FOR NN10351233 TANK

Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)
-		6	557	12	1582	18	2898	24	4434	30	6140	36	7981	42	9923	48	11941	54	14006	60	16096
1/8	2	6 1/8	575	12 1/8	1606	18 1/8	2928	24 1/8	4467	30 1/8	6177	36 1/8	8020	42 1/8	9965	48 1/8	11983	54 1/8	14050	60 1/8	16140
1/4	5	6 1/4	593	12 1/4	1631	18 1/4	2958	24 1/4	4501	30 1/4	6214	36 1/4	8060	42 1/4	10006	48 1/4	12026	54 1/4	14093	60 1/4	16183
3/8	9	6 3/8	611	12 3/8	1656	18 3/8	2988	24 3/8	4536	30 3/8	6252	36 3/8	8099	42 3/8	10048	48 3/8	12068	54 3/8	14136	60 3/8	16227
1/2	14	6 1/2	629	12 1/2	1681	18 1/2	3018	24 1/2	4570	30 1/2	6289	36 1/2	8139	42 1/2	10089	48 1/2	12111	54 1/2	14180	60 1/2	16271
5/8	19	6 5/8	647	12 5/8	1707	18 5/8	3049	24 5/8	4604	30 5/8	6326	36 5/8	8179	42 5/8	10130	48 5/8	12154	54 5/8	14223	60 5/8	16314
3/4	25	6 3/4	666	12 3/4	1732	18 3/4	3079	24 3/4	4638	30 3/4	6364	36 3/4	8218	42 3/4	10172	48 3/4	12197	54 3/4	14267	60 3/4	16358
7/8	31	6 7/8	684	12 7/8	1758	18 7/8	3110	24 7/8	4673	30 7/8	6401	36 7/8	8258	42 7/8	10214	48 7/8	12239	54 7/8	14310	60 7/8	16401
1	38	7	703	13	1783	19	3140	25	4707	31	6439	37	8298	43	10255	49	12282	55	14354	61	16445
1 1/8	45	7 1/8	722	13 1/8	1809	19 1/8	3171	25 1/8	4742	31 1/8	6476	37 1/8	8338	43 1/8	10297	49 1/8	12325	55 1/8	14397	61 1/8	16489
1 1/4	53	7 1/4	741	13 1/4	1835	19 1/4	3202	25 1/4	4776	31 1/4	6514	37 1/4	8378	43 1/4	10338	49 1/4	12368	55 1/4	14440	61 1/4	16532
1 3/8	61	7 3/8	761	13 3/8	1861	19 3/8	3232	25 3/8	4811	31 3/8	6551	37 3/8	8418	43 3/8	10380	49 3/8	12411	55 3/8	14484	61 3/8	16576
1 1/2	69	7 1/2	780	13 1/2	1887	19 1/2	3263	25 1/2	4846	31 1/2	6589	37 1/2	8458	43 1/2	10422	49 1/2	12453	55 1/2	14527	61 1/2	16619
1 5/8	78	7 5/8	800	13 5/8	1913	19 5/8	3294	25 5/8	4881	31 5/8	6627	37 5/8	8498	43 5/8	10463	49 5/8	12496	55 5/8	14571	61 5/8	16663
1 3/4	87	7 3/4	820	13 3/4	1939	19 3/4	3326	25 3/4	4915	31 3/4	6665	37 3/4	8538	43 3/4	10505	49 3/4	12539	55 3/4	14614	61 3/4	16707
1 7/8	97	7 7/8	840	13 7/8	1966	19 7/8	3357	25 7/8	4950	31 7/8	6702	37 7/8	8578	43 7/8	10547	49 7/8	12582	55 7/8	14658	61 7/8	16750
2	106	8	860	14	1992	20	3388	26	4985	32	6740	38	8618	44	10589	50	12625	56	14701	62	16794
2 1/8	117	8 1/8	880	14 1/8	2019	20 1/8	3420	26 1/8	5020	32 1/8	6778	38 1/8	8658	44 1/8	10631	50 1/8	12668	56 1/8	14745	62 1/8	16837
2 1/4	127	8 1/4	901	14 1/4	2046	20 1/4	3451	26 1/4	5056	32 1/4	6816	38 1/4	8699	44 1/4	10672	50 1/4	12711	56 1/4	14788	62 1/4	16881
2 3/8	138	8 3/8	921	14 3/8	2073	20 3/8	3483	26 3/8	5091	32 3/8	6855	38 3/8	8739	44 3/8	10714	50 3/8	12754	56 3/8	14832	62 3/8	16925
2 1/2	149	8 1/2	942	14 1/2	2100	20 1/2	3514	26 1/2	5126	32 1/2	6893	38 1/2	8779	44 1/2	10756	50 1/2	12797	56 1/2	14875	62 1/2	16968
2 5/8	160	8 5/8	963	14 5/8	2127	20 5/8	3546	26 5/8	5161	32 5/8	6931	38 5/8	8820	44 5/8	10798	50 5/8	12840	56 5/8	14919	62 5/8	17012
2 3/4	172	8 3/4	984	14 3/4	2154	20 3/4	3578	26 3/4	5197	32 3/4	6969	38 3/4	8860	44 3/4	10840	50 3/4	12883	56 3/4	14963	62 3/4	17055
2 7/8	184	8 7/8	1005	14 7/8	2181	20 7/8	3610	26 7/8	5232	32 7/8	7007	38 7/8	8901	44 7/8	10882	50 7/8	12926	56 7/8	15006	62 7/8	17099
3	196	9	1027	15	2209	21	3642	27	5268	33	7046	39	8941	45	10924	51	12969	57	15050	63	17142
3 1/8	208	9 1/8	1048	15 1/8	2236	21 1/8	3674	27 1/8	5304	33 1/8	7084	39 1/8	8982	45 1/8	10966	51 1/8	13012	57 1/8	15093	63 1/8	17186
3 1/4	221	9 1/4	1070	15 1/4	2264	21 1/4	3706	27 1/4	5339	33 1/4	7123	39 1/4	9022	45 1/4	11008	51 1/4	13055	57 1/4	15137	63 1/4	17230
3 3/8	234	9 3/8	1092	15 3/8	2292	21 3/8	3738	27 3/8	5375	33 3/8	7161	39 3/8	9063	45 3/8	11051	51 3/8	13098	57 3/8	15180	63 3/8	17273
3 1/2	247	9 1/2	1114	15 1/2	2319	21 1/2	3770	27 1/2	5411	33 1/2	7200	39 1/2	9103	45 1/2	11093	51 1/2	13141	57 1/2	15224	63 1/2	17317
3 5/8	261	9 5/8	1136	15 5/8	2347	21 5/8	3803	27 5/8	5447	33 5/8	7238	39 5/8	9144	45 5/8	11135	51 5/8	13184	57 5/8	15268	63 5/8	17360
3 3/4	274	9 3/4	1158	15 3/4	2376	21 3/4	3835	27 3/4	5483	33 3/4	7277	39 3/4	9185	45 3/4	11177	51 3/4	13228	57 3/4	15311	63 3/4	17404
3 7/8	288	9 7/8	1180	15 7/8	2404	21 7/8	3868	27 7/8	5519	33 7/8	7316	39 7/8	9225	45 7/8	11219	51 7/8	13271	57 7/8	15355	63 7/8	17447
4	302	10	1203	16	2432	22	3901	28	5555	34	7354	40	9266	46	11261	52	13314	58	15398	64	17491
4 1/8	317	10 1/8	1226	16 1/8	2460	22 1/8	3933	28 1/8	5591	34 1/8	7393	40 1/8	9307	46 1/8	11304	52 1/8	13357	58 1/8	15442	64 1/8	17534
4 1/4	331	10 1/4	1248	16 1/4	2489	22 1/4	3966	28 1/4	5627	34 1/4	7432	40 1/4	9348	46 1/4	11346	52 1/4	13400	58 1/4	15485	64 1/4	17578
4 3/8	346	10 3/8	1271	16 3/8	2517	22 3/8	3999	28 3/8	5663	34 3/8	7471	40 3/8	9389	46 3/8	11388	52 3/8	13443	58 3/8	15529	64 3/8	17621
4 1/2	361	10 1/2	1294	16 1/2	2546	22 1/2	4032	28 1/2	5700	34 1/2	7510	40 1/2	9430	46 1/2	11431	52 1/2	13487	58 1/2	15573	64 1/2	17665
4 5/8	376	10 5/8	1318	16 5/8	2575	22 5/8	4065	28 5/8	5736	34 5/8	7549	40 5/8	9471	46 5/8	11473	52 5/8	13530	58 5/8	15616	64 5/8	17708
4 3/4	392	10 3/4	1341	16 3/4	2604	22 3/4	4098	28 3/4	5772	34 3/4	7588	40 3/4	9512	46 3/4	11515	52 3/4	13573	58 3/4	15660	64 3/4	17752
4 7/8	408	10 7/8	1364	16 7/8	2633	22 7/8	4131	28 7/8	5809	34 7/8	7627	40 7/8	9553	46 7/8	11558	52 7/8	13616	58 7/8	15704	64 7/8	17795
5	423	11	1388	17	2662	23	4165	29	5846	35	7666	41	9594	47	11600	53	13660	59	15747	65	17839
5 1/8	440	11 1/8	1412	17 1/8	2691	23 1/8	4198	29 1/8	5882	35 1/8	7705	41 1/8	9635	47 1/8	11643	53 1/8	13703	59 1/8	15791	65 1/8	17882
5 1/4	456	11 1/4	1436	17 1/4	2720	23 1/4	4231	29 1/4	5919	35 1/4	7744	41 1/4	9676	47 1/4	11685	53 1/4	13746	59 1/4	15834	65 1/4	17925
5 3/8	472	11 3/8	1460	17 3/8	2750	23 3/8	4265	29 3/8	5956	35 3/8	7784	41 3/8	9717	47 3/8	11728	53 3/8	13790	59 3/8	15878	65 3/8	17969
5 1/2	489	11 1/2	1484	17 1/2	2779	23 1/2	4298	29 1/2	5992	35 1/2	7823	41 1/2	9758	47 1/2	11770	53 1/2	13833	59 1/2	15922	65 1/2	18012
5 5/8	506	11 5/8	1508	17 5/8	2809	23 5/8	4332	29 5/8	6029	35 5/8	7862	41 5/8	9799	47 5/8	11813	53 5/8	13876	59 5/8	15965	65 5/8	18056
5 3/4	523	11 3/4	1533	17 3/4	2838	23 3/4	4366	29 3/4	6066	35 3/4	7902	41 3/4	9841	47 3/4	11855	53 3/4	13920	59 3/4	16009	65 3/4	18099
5 7/8	540	11 7/8	1557	17 7/8	2868	23 7/8	4400	29 7/8	6103	35 7/8	7941	41 7/8	9882	47 7/8	11898	53 7/8	13963	59 7/8	16052	65 7/8	18142

** PRECISION IS ABOUT +/- 1%



CAPACITY CHART FOR NN10351233 TANK

Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)	Height (in)	Gallons (U.S.)
66	18186	71	19910	76	21603	81	23251	86	24838	91	26347	96	27759	101	29052	106	30200	111	31165	116	31890
66 1/8	18229	71 1/8	19953	76 1/8	21645	81 1/8	23292	86 1/8	24877	91 1/8	26383	96 1/8	27793	101 1/8	29083	106 1/8	30226	111 1/8	31187	116 1/8	31904
66 1/4	18273	71 1/4	19996	76 1/4	21687	81 1/4	23332	86 1/4	24915	91 1/4	26420	96 1/4	27826	101 1/4	29113	106 1/4	30253	111 1/4	31208	116 1/4	31918
66 3/8	18316	71 3/8	20038	76 3/8	21729	81 3/8	23372	86 3/8	24954	91 3/8	26456	96 3/8	27860	101 3/8	29144	106 3/8	30279	111 3/8	31229	116 3/8	31931
66 1/2	18359	71 1/2	20081	76 1/2	21770	81 1/2	23413	86 1/2	24993	91 1/2	26492	96 1/2	27894	101 1/2	29174	106 1/2	30305	111 1/2	31250	116 1/2	31945
66 5/8	18403	71 5/8	20124	76 5/8	21812	81 5/8	23453	86 5/8	25031	91 5/8	26529	96 5/8	27927	101 5/8	29204	106 5/8	30331	111 5/8	31271	116 5/8	31958
66 3/4	18446	71 3/4	20166	76 3/4	21854	81 3/4	23493	86 3/4	25070	91 3/4	26565	96 3/4	27961	101 3/4	29234	106 3/4	30357	111 3/4	31291	116 3/4	31971
66 7/8	18489	71 7/8	20209	76 7/8	21895	81 7/8	23534	86 7/8	25108	91 7/8	26601	96 7/8	27994	101 7/8	29264	106 7/8	30383	111 7/8	31312	116 7/8	31984
67	18532	72	20252	77	21937	82	23574	87	25146	92	26637	97	28028	102	29294	107	30409	112	31332	117	31996
67 1/8	18576	72 1/8	20294	77 1/8	21979	82 1/8	23614	87 1/8	25185	92 1/8	26673	97 1/8	28061	102 1/8	29324	107 1/8	30435	112 1/8	31352	117 1/8	32008
67 1/4	18619	72 1/4	20337	77 1/4	22020	82 1/4	23654	87 1/4	25223	92 1/4	26709	97 1/4	28094	102 1/4	29354	107 1/4	30460	112 1/4	31372	117 1/4	32020
67 3/8	18662	72 3/8	20379	77 3/8	22062	82 3/8	23694	87 3/8	25261	92 3/8	26745	97 3/8	28127	102 3/8	29383	107 3/8	30485	112 3/8	31392	117 3/8	32032
67 1/2	18705	72 1/2	20422	77 1/2	22103	82 1/2	23734	87 1/2	25299	92 1/2	26781	97 1/2	28160	102 1/2	29413	107 1/2	30511	112 1/2	31412	117 1/2	32043
67 5/8	18749	72 5/8	20464	77 5/8	22145	82 5/8	23774	87 5/8	25338	92 5/8	26817	97 5/8	28193	102 5/8	29443	107 5/8	30536	112 5/8	31431	117 5/8	32054
67 3/4	18792	72 3/4	20507	77 3/4	22186	82 3/4	23814	87 3/4	25376	92 3/4	26853	97 3/4	28226	102 3/4	29472	107 3/4	30561	112 3/4	31451	117 3/4	32065
67 7/8	18835	72 7/8	20549	77 7/8	22227	82 7/8	23854	87 7/8	25414	92 7/8	26889	97 7/8	28259	102 7/8	29501	107 7/8	30586	112 7/8	31470	117 7/8	32075
68	18878	73	20592	78	22269	83	23894	88	25452	93	26924	98	28292	103	29530	108	30610	113	31489	118	32086
68 1/8	18921	73 1/8	20634	78 1/8	22310	83 1/8	23934	88 1/8	25490	93 1/8	26960	98 1/8	28324	103 1/8	29559	108 1/8	30635	113 1/8	31508	118 1/8	32095
68 1/4	18965	73 1/4	20677	78 1/4	22351	83 1/4	23974	88 1/4	25528	93 1/4	26995	98 1/4	28357	103 1/4	29588	108 1/4	30660	113 1/4	31526	118 1/4	32105
68 3/8	19008	73 3/8	20719	78 3/8	22393	83 3/8	24013	88 3/8	25565	93 3/8	27031	98 3/8	28389	103 3/8	29617	108 3/8	30684	113 3/8	31545	118 3/8	32114
68 1/2	19051	73 1/2	20761	78 1/2	22434	83 1/2	24053	88 1/2	25603	93 1/2	27066	98 1/2	28422	103 1/2	29646	108 1/2	30708	113 1/2	31563	118 1/2	32123
68 5/8	19094	73 5/8	20804	78 5/8	22475	83 5/8	24093	88 5/8	25641	93 5/8	27101	98 5/8	28454	103 5/8	29675	108 5/8	30732	113 5/8	31581	118 5/8	32131
68 3/4	19137	73 3/4	20846	78 3/4	22516	83 3/4	24132	88 3/4	25678	93 3/4	27137	98 3/4	28486	103 3/4	29703	108 3/4	30756	113 3/4	31599	118 3/4	32139
68 7/8	19180	73 7/8	20888	78 7/8	22557	83 7/8	24172	88 7/8	25716	93 7/8	27172	98 7/8	28518	103 7/8	29732	108 7/8	30780	113 7/8	31617	118 7/8	32147
69	19223	74	20931	79	22598	84	24212	89	25754	94	27207	99	28550	104	29760	109	30804	114	31635	119	32154
69 1/8	19266	74 1/8	20973	79 1/8	22640	84 1/8	24251	89 1/8	25791	94 1/8	27242	99 1/8	28582	104 1/8	29788	109 1/8	30828	114 1/8	31652	119 1/8	32161
69 1/4	19309	74 1/4	21015	79 1/4	22681	84 1/4	24290	89 1/4	25829	94 1/4	27277	99 1/4	28614	104 1/4	29817	109 1/4	30851	114 1/4	31669	119 1/4	32167
69 3/8	19352	74 3/8	21057	79 3/8	22722	84 3/8	24330	89 3/8	25866	94 3/8	27312	99 3/8	28646	104 3/8	29845	109 3/8	30874	114 3/8	31686	119 3/8	32173
69 1/2	19395	74 1/2	21099	79 1/2	22762	84 1/2	24369	89 1/2	25903	94 1/2	27346	99 1/2	28678	104 1/2	29873	109 1/2	30898	114 1/2	31703	119 1/2	32179
69 5/8	19438	74 5/8	21142	79 5/8	22803	84 5/8	24409	89 5/8	25941	94 5/8	27381	99 5/8	28710	104 5/8	29900	109 5/8	30921	114 5/8	31720	119 5/8	32183
69 3/4	19481	74 3/4	21184	79 3/4	22844	84 3/4	24448	89 3/4	25978	94 3/4	27416	99 3/4	28741	104 3/4	29928	109 3/4	30944	114 3/4	31736	119 3/4	32187
69 7/8	19524	74 7/8	21226	79 7/8	22885	84 7/8	24487	89 7/8	26015	94 7/8	27450	99 7/8	28773	104 7/8	29956	109 7/8	30967	114 7/8	31753	119 7/8	32190
70	19567	75	21268	80	22926	85	24526	90	26052	95	27485	100	28804	105	29983	110	30989	115	31769		
70 1/8	19610	75 1/8	21310	80 1/8	22967	85 1/8	24565	90 1/8	26089	95 1/8	27519	100 1/8	28835	105 1/8	30011	110 1/8	31012	115 1/8	31785		
70 1/4	19653	75 1/4	21352	80 1/4	23007	85 1/4	24604	90 1/4	26126	95 1/4	27554	100 1/4	28867	105 1/4	30038	110 1/4	31034	115 1/4	31800		
70 3/8	19696	75 3/8	21394	80 3/8	23048	85 3/8	24643	90 3/8	26163	95 3/8	27588	100 3/8	28898	105 3/8	30065	110 3/8	31056	115 3/8	31816		
70 1/2	19739	75 1/2	21436	80 1/2	23089	85 1/2	24682	90 1/2	26200	95 1/2	27622	100 1/2	28929	105 1/2	30092	110 1/2	31078	115 1/2	31831		
70 5/8	19782	75 5/8	21478	80 5/8	23129	85 5/8	24721	90 5/8	26237	95 5/8	27657	100 5/8	28960	105 5/8	30119	110 5/8	31100	115 5/8	31846		
70 3/4	19824	75 3/4	21520	80 3/4	23170	85 3/4	24760	90 3/4	26273	95 3/4	27691	100 3/4	28991	105 3/4	30146	110 3/4	31122	115 3/4	31861		
70 7/8	19867	75 7/8	21561	80 7/8	23211	85 7/8	24799	90 7/8	26310	95 7/8	27725	100 7/8	29021	105 7/8	30173	110 7/8	31144	115 7/8	31875		

** PRECISION IS ABOUT +/- 1%